



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





**VHDM Power Insulator
Replacement Inserts
Instruction Sheet
Order No. 62100-3500 & 62100-3600**

FEATURES

The VHDM Power Insulator Replacement Inserters are used to insert a replacement power insulator onto the contacts on a printed circuit board. The 62100-3500 is for the 6-row insulators (P.N. 74029-6000 or 74029-6050) and the 62100-3600 is for the 8-row insulators (P.N. 74029-8000 or 74029-8050). Figure 1 shows the two inserts. Also shown in Figure 1 is a plastic hammer and a slip joint pliers, which are needed but not supplied by Molex.

REMOVAL OPERATION:

To remove a damaged power insulator, grip the ends with the pliers and work it loose from the contacts as shown in Figure 2. Take care not to damage the contacts.



Figure 2-Insulator Removal


REPLACEMENT OPERATION:

To install the new power insulator, use the following procedure:

1. Load the new power insulator into the correct size tool (6 or 8-Row) as shown in Figure 3.



**Figure 1-TOOLS NEEDED
(From Left To Right: 6-Row
Inserter, 8-Row Inserter, Slip
Joint Pliers, Plastic Hammer)**

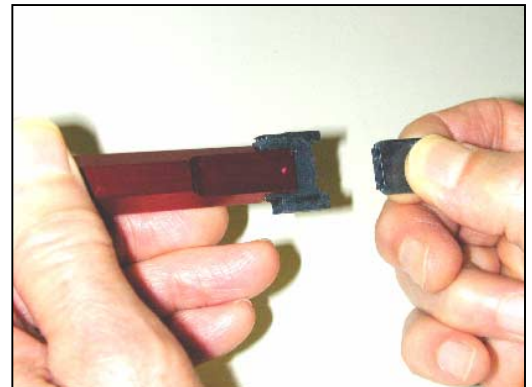

**Figure 3
Loading an Insulator into**

2. Make sure the insulator is oriented correctly. See Figure 4.
3. Carefully position the insulator on the contacts and slowly apply pressure until the insulator is fully seated flush with the printed circuit board.
NOTE: If necessary, the plastic hammer can be used to aid in seating the insulator as shown in Figure 5.
4. Inspect the backplane power assembly for proper seating and to insure that there is no damage. The final assembly should appear as shown in Figure 6.

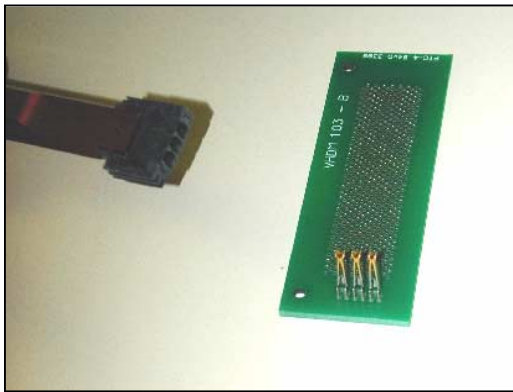


Figure 4
Orientation Of Insulator

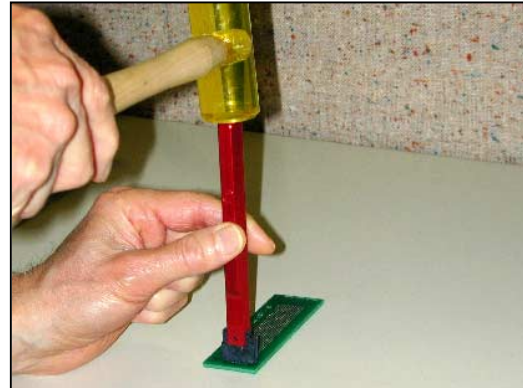


Figure 5
Seating the Insulator

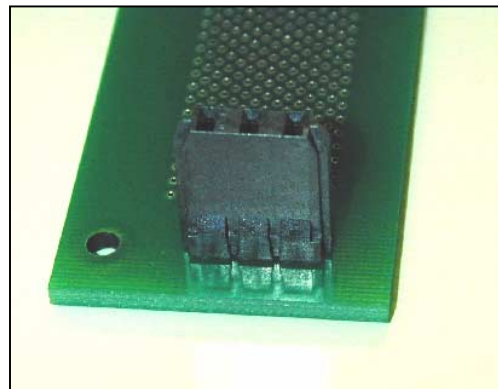


Figure 6
Final Assembly

Molex Application Tooling Group

1150 E. Diehl Road
Naperville, IL 60563
Tel: (630) 969-4550
Fax: (630) 505-0049