



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Mini FX Evaluation Kit

A Low-Cost Tool for Evaluating and Developing
LONWORKS® Devices for Control Networks

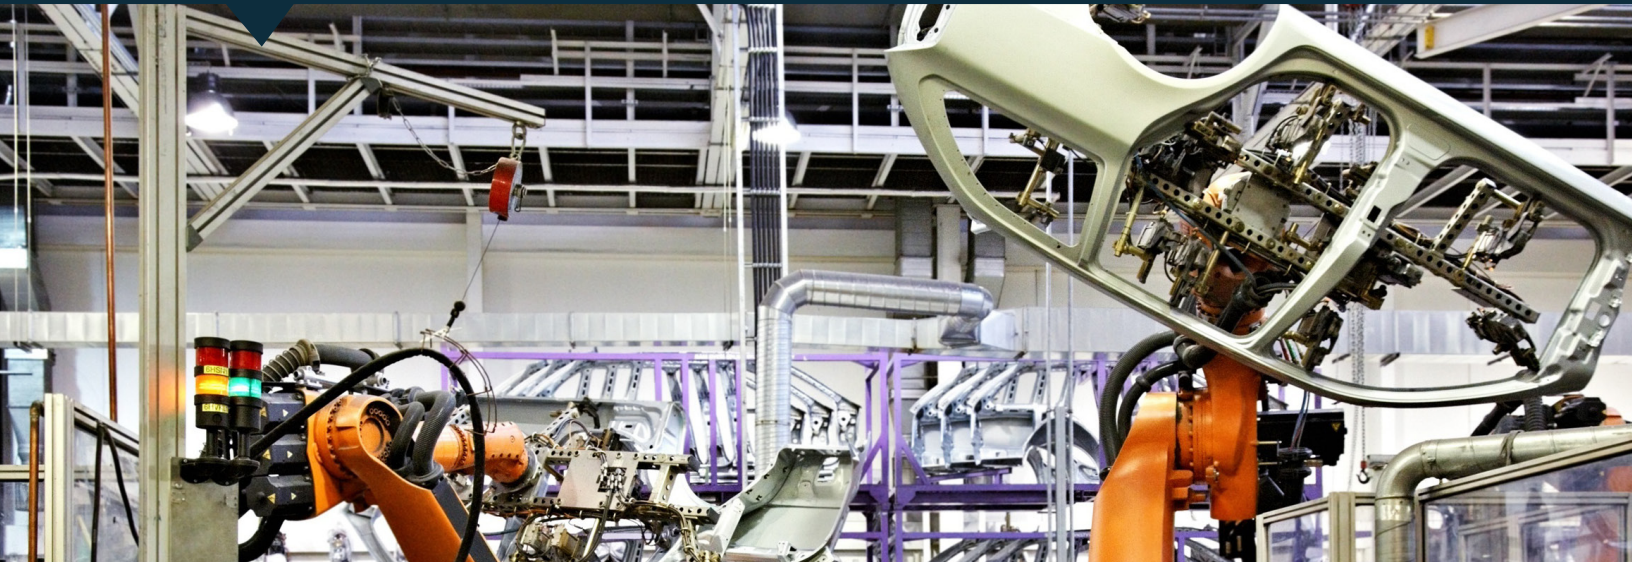

Designed for control system developers, integrators, specifying engineers, educators, and students, Mini FX combines a flexible hardware platform with sample Neuron® C applications and a Neuron C compiler.

In just a matter of minutes, you can easily set up and demonstrate twisted pair or power line control networks, as well as write, compile, and load new applications of your own design.

Features

- Introduces developers to LonWorks control networking using ISO/IEC 14908-1 with a simple evaluation and programming environment.
- Includes example applications for device networking.
- Can be used without any separate network installation tools for running self-installed examples or creating self-installed devices.
- Can be used with the LonMaker® Integration Tool (Standard or Professional Edition) to develop and test devices for managed networks.
- Speeds development of control networks with the powerful Neuron C programming language and a compiler that supports up to 32 network variables.
- Downloads compiled Neuron C applications to target hardware over the control network.
- Provides easy resource and hardware definition and editing with built-in resource and hardware template editors.
- Includes two evaluation boards, I/O hardware, and USB interface for fast plug-and-play setup.
- Provides easy migration to the powerful NodeBuilder® Development Tool.
- Available in free topology twisted pair (FT) and power line (PL) versions.

or 3100 Smart Transceiver. Using the Mini FX software, you write your device applications using the Neuron C Version 2.2 programming language, a high-level language based on ANSI C with extensions to simplify network communication, hardware I/O, and event-driven processing. For Series 5000 applications, Neuron C Version 2.2 also introduces support for application-specific interrupt handlers and a hardware semaphore that can be used for interrupt task synchronization. Interrupt sources include signals on any of the 12 I/O pins (rising edge, falling edge, either edge, positive or negative level), the high-performance on-chip timer and counter units, and a dedicated, configurable, high-performance, periodic system timer.

You can use the Neuron C compiler included with Mini FX to compile applications with up to 32 network variables, and that require up to 12K compiled instructions (resulting in approximately 32KB of compiled application code). To develop larger applications or to develop applications that require more network variables, you can upgrade to the NodeBuilder FX software, which includes support for up to 254 static network variables, up to 127 network variable aliases, and no code limit other than available memory.

If the standard resource files do not include the resources you need, a powerful resource editor lets you view standard types and functional profiles, and create user-defined types and profiles.

Built-in Examples Shorten Design Time

Mini FX includes working example applications that let you evaluate the benefits of the LonWorks platform without writing any code. These applications demonstrate how control devices can interact with I/O hardware and exchange data over a control network. They also demonstrate how control networks can be created without the use of any installation tools through a simple process called self-installation. The applications are compatible with standard LonWorks installation tools such as the LonMaker[®] Integration Tool, letting you evaluate the capability of devices to be used in control networks with or without network installation tools.

All examples are provided in both executable images and source code. An example application is pre-loaded into each Mini EVB Evaluation Board, allowing new users to get a control network up and running within minutes.

You can use the Mini FX software to modify the Neuron C examples, create new applications based on the Mini FX examples, or create new examples from scratch. You can use the powerful self-installation library (included with the examples) in custom applications that do not require the use of any installation tools, and yet are fully compatible with standard LonWorks installation tools such as the LonMaker Integration Tool.

Specifications

Operating System

Microsoft Windows Vista or Windows XP.

Minimum Hardware

Intel Pentium[®] III 600MHz processor; 2GB RAM for Windows Vista, 512MB RAM for Windows XP; CD-ROM drive; 1024 x 768 display with at least 256 colors; mouse or other Windows-compatible pointing device; 120 to 350MB free hard-disk space.

Compatible LNS Network Interfaces and IP-852 Routers

OpenLDV-compatible local and remote network interface or IP-852 router. Compatible local network interfaces include the U10/U20 USB network interface (a U10 is included with Mini FX/FT and a U20 is included with Mini FX/PL); PCC-10, PCLTA-20, or PCLTA-21 network interfaces; and the SLTA-10 Serial LonTalk Adapter. Compatible remote network interfaces include the i.LON[®] SmartServer and i.LON 600 LonWorks IP Server. Compatible IP-852 routers include the i.LON SmartServer with IP-852 routing and the i.LON 600 LonWorks IP Server. If you are using an IP-852 router, your computer must have an IP network interface such as an Ethernet card or modem with PPP software. In addition, the i.LON software must be installed on your computer, and the IP-852 channel must be configured using the LonWorks-IP Configuration Server application software.

Neuron C Version 2.2 Neuron C I/O Objects

Bit, byte, nibble input/output
Bitshift input/output
Dallas Touch input/output
Dual slope input (for low-cost A/D)
Edge divide output
Edgelog input.
Frequency output.
Infrared input
Infrared pattern output
I₂C input/output
Level detect input
Magcard bitstream input
Magcard track 1 and 2 input
(for ISO 7811 input)

Muxbus input/output
(multiplexed address/data)
Neurowire input/output
(National Semiconductor Microwire and Motorola SPI compatible)
Oneshot output, ontime input, period input, pulsewidth output
Parallel input/output
Pulsecount input/output
Quadrature input
SCI (UART) serial input/output*
SPI serial input/output*
Serial input/output
Total count input
Touch input/output (Maxim/Dallas 1-Wire[®] protocol-compatible)
Triac and stretched triac** output
Triggered count output
Wiegand input

Neuron C Network Communication Extensions

Functional blocks
Network variables
Configuration properties
Application and foreign-frame messages

** For Series 5000 and 3100 Smart Transceivers and Neuron Chips with hardware SCI and SPI support only*

*** For Series 5000 Smart Transceivers and Neuron Chips with stretched triac support only*

FT 5000 EVB

Processor

FT 5000 Smart Transceiver.

Processor Input Clock

10MHz (5MHz to 80MHz internal system clock).

Processor Memory

64KB on-chip RAM, 16KB on-chip ROM, 64KB external serial flash memory, and 64KB external serial EEPROM mapped to 64KB Neuron memory space based on hardware template definition.

Operating Input Voltage

+9 to 12VDC unregulated.

External I/O Power

Combined +5V and +3.3V current not to exceed 100mA.

External Power Supply

100 to 240VAC; 50 or 60Hz.

Operating Temperature

0 to +45°C

Non-operating Temperature

-20 to +70°C

Dimensions

140mm x 105mm x 30mm

EMC Compliance

EN 55022 Class A.

PL 3150 and PL 3170 EVB

Processor

PL 3150 EVB: PL 3150 Smart Transceiver.
PL 3170 EVB: PL 3170 Smart Transceiver.

Processor Input Clock

10MHz (5MHz internal system clock).

Processor Memory

PL 3150 EVB: 56KB flash memory and 2KB on-chip RAM.
PL 3170 EVB: 4KB on-chip flash memory and 2KB on-chip RAM.

Operating Input Voltage

+11 to 17.8VDC unregulated.

Operating Input Current

250mA max, not including external I/O.

External I/O Power

+5V current not to exceed 100mA.

External Power Supply

100 to 240VAC; 50 or 60Hz with power line coupler.

Operating Temperature

0 to +40°C

Non-operating Temperature

-20 to +65°C

Dimensions

114mm x 70mm x 32mm
(excluding connectors)

EMC Compliance

EN 55022 Class A.

Documentation

FT 5000 EVB Examples Guide

078-0389-01

FT 5000 EVB Hardware Guide

078-0390-01

I/O Model Reference for Smart Transceivers and Neuron Chips

078-0392-01

Introduction to the LonWorks Platform

078-0183-01

ISI Programmer's Guide

078-0299-01

ISI Protocol Specification

078-0300-01

LonWorks USB Interfaces User's Guide

078-0296-01

Mini FX/FT Quick Start Guide

078-0418-01

Mini FX/PL Examples Guide

078-0394-01

Mini FX/PL Hardware Guide

078-0395-01

Mini FX/PL Quick Start Guide

078-0419-01

Mini FX User's Guide

078-0398-01

Neuron Assembly Language Reference

078-0399-01

Neuron C Programmer's Guide

078-0002-02

Neuron C Reference Guide

078-0140-02

Neuron Tools Error Guide

078-0402-01

NodeBuilder Resource Editor User's Guide

078-0194-01

NodeBuilder Resource Report Generator User's Guide

078-0260-01

PL 3120/PL 3150/PL 3170 Smart Transceiver Data Book

005-0193-01

Series 5000 Chip Data Book

005-0199-01

Ordering Information

Mini FX/FT Evaluation Kit

10000R-40-24

Mini FX/PL Evaluation Kit

10000R-40-27

Both kits include 100-240VAC 50/60Hz power supplies with both US/Japan and Europlugs (CEE 7/16).