



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





(images/product/114990167_1_01.jpg)

Adjustable DC/DC Power Converter with LED segment display(4.5V - 28V/1.5A)

SKU: 114990167




WIO LINK is LIVE at Kickstarter!


(https://www.kickstarter.com/projects/seeed/wio-link-3-steps-5-minutes-build-your-iot-applicat/description?ref=banner_depot)

Description

Function

- Operating mode description
- With key off function, and reduce power consumption.
- Power state can be freely defined
- Input and output voltages can be displayed alternately
- On/Off output status, high level means output off, low level means output on. (note: high level (3.3v), the maximum output current 5mA)
- Output voltage mode: Boot default display it, LED indicator off
- Input voltage mode: Press button switch to it , LED indicator on
- Alternating mode: Press button again input/output voltage alternately display (3s). Press button again, switch to output voltage display

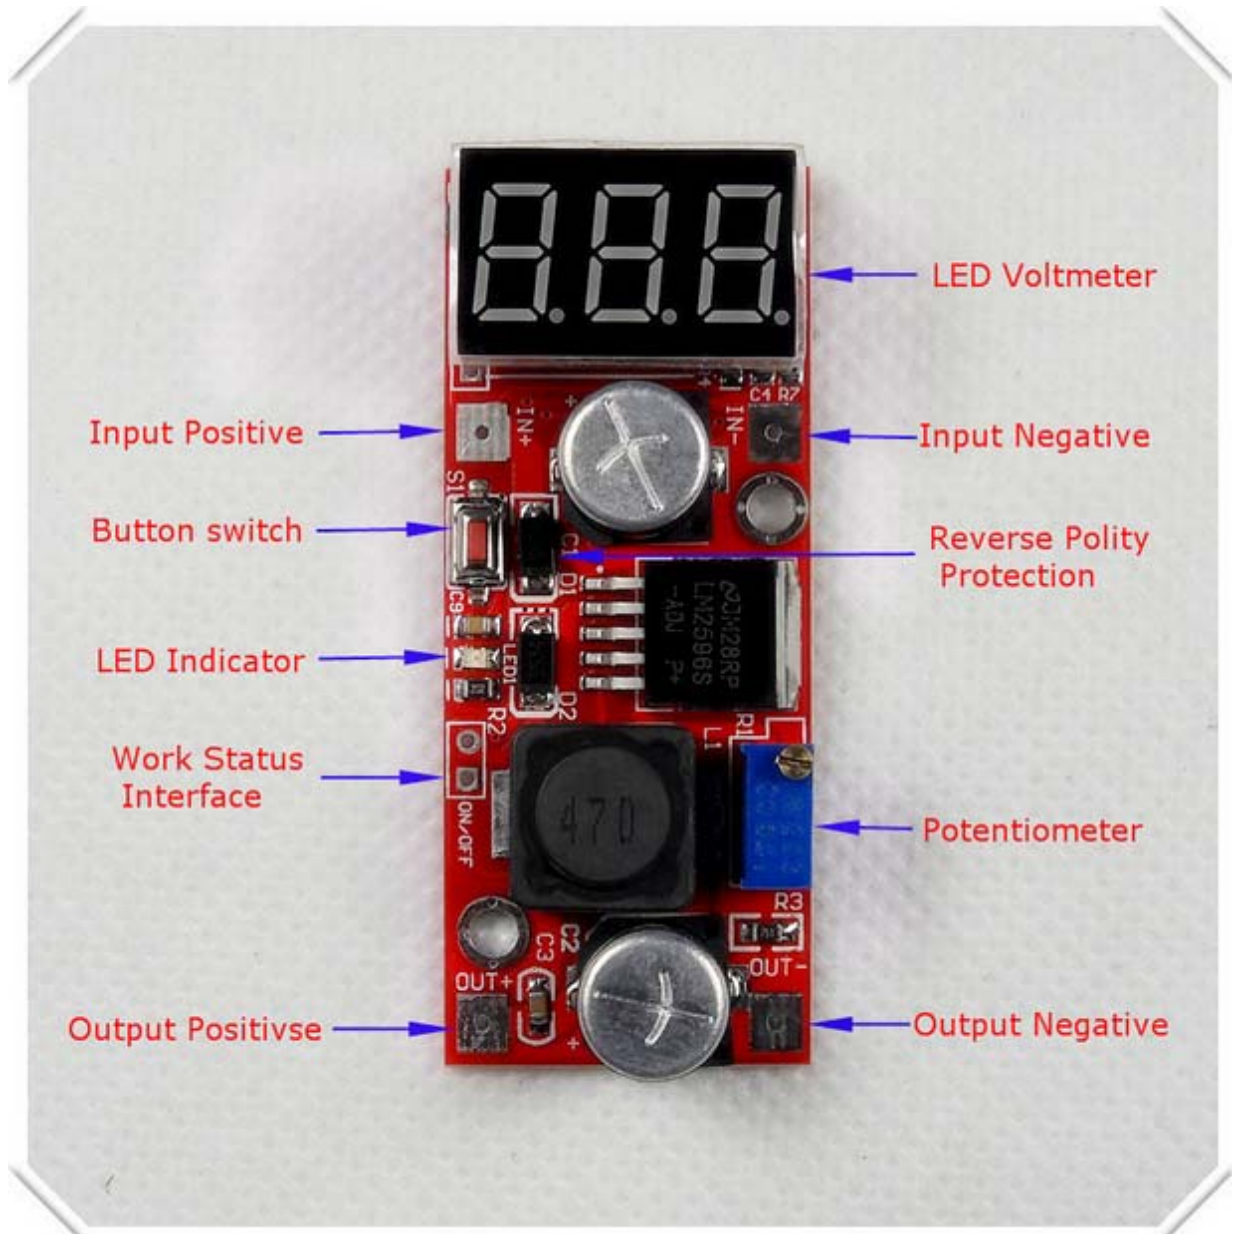


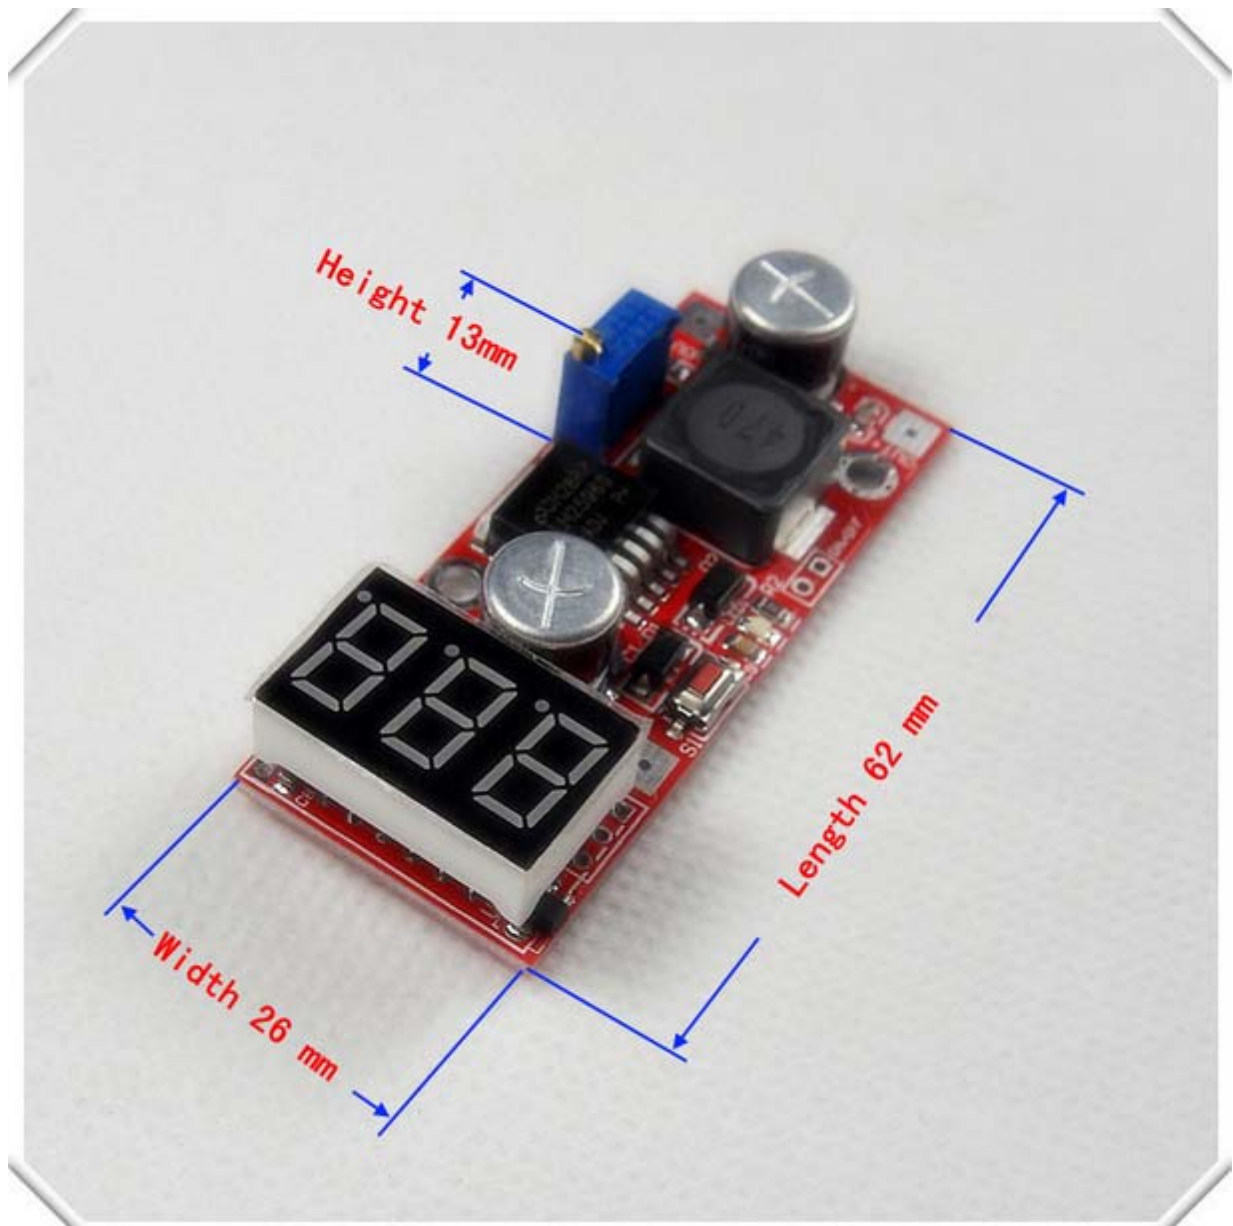



Features:

- In+: Input positive
- In-: Input negative
- Out+: Output positive
- Out-: Output negative
- weight: 20g
- Dimensions: 62 *26 *14mm(length*width*height)
- Ripple peak: About 100mV
- Display color: Red/Green/Blue
- Input voltage: 4.5-28V
- Output power: 15W maximum
- Output voltage: 1.3v-25v (step-down mode, the input voltage must be 2v higher than the output voltage)
- Output current: 1.5A

- Ripple frequency: About 150KHZ
- Voltage meter accuracy: $\pm(5\% + 1 \text{ digit})$
- Static power consumption: Typical about 20mA

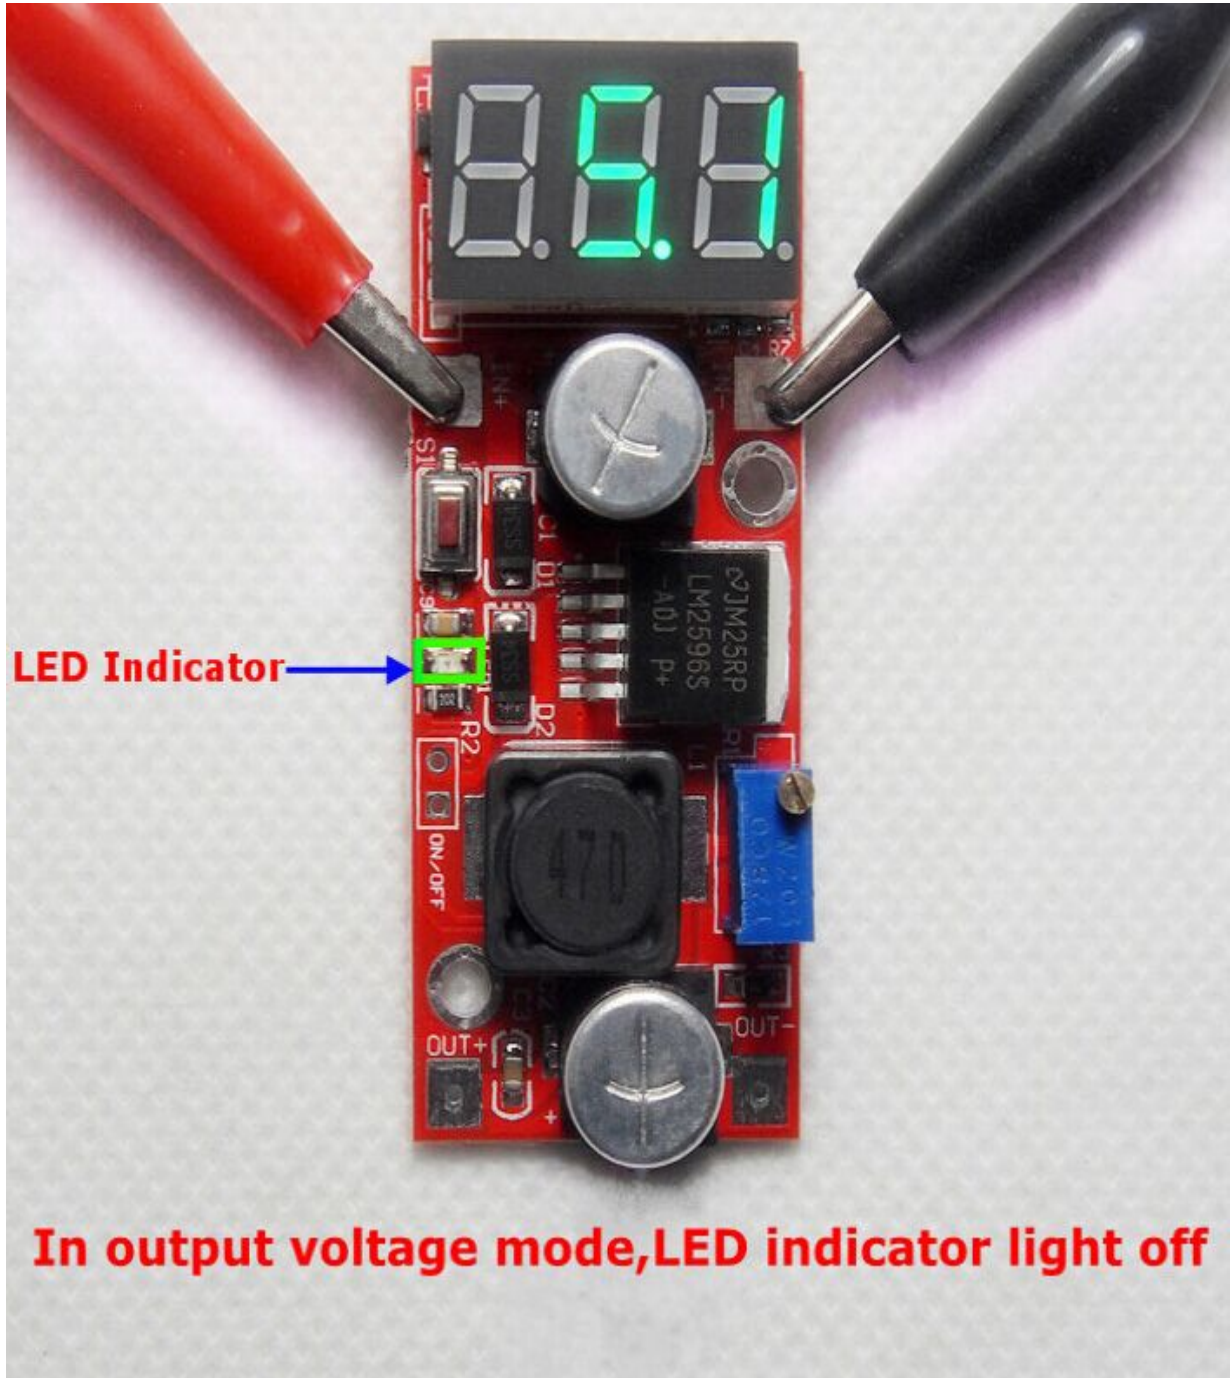


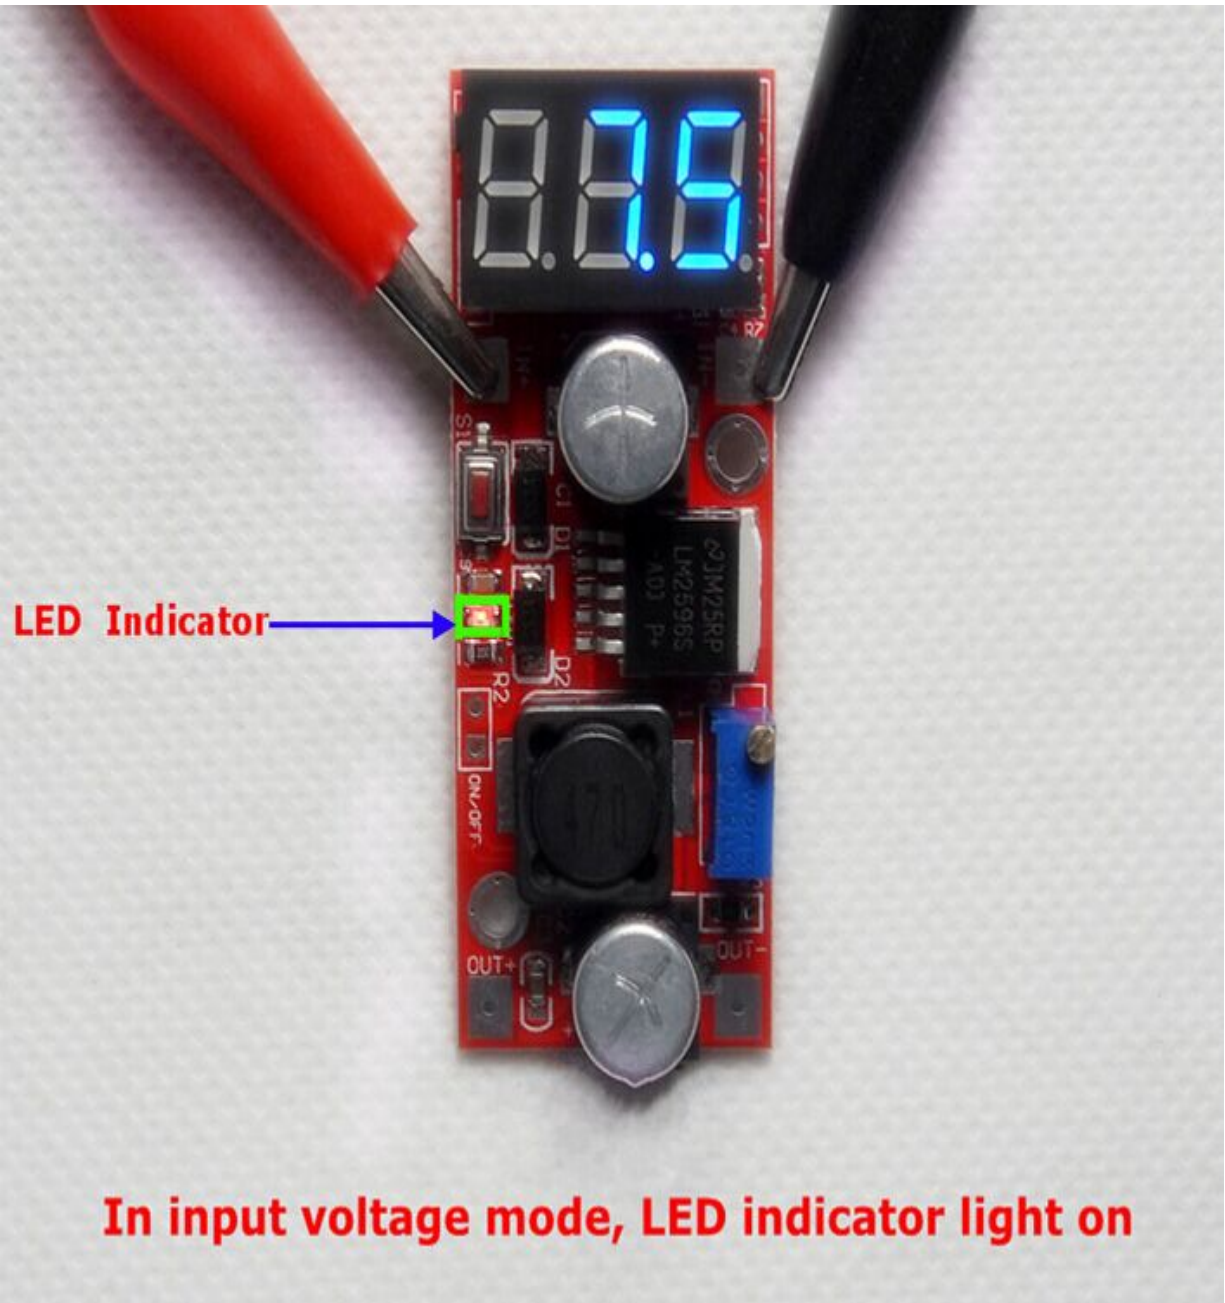

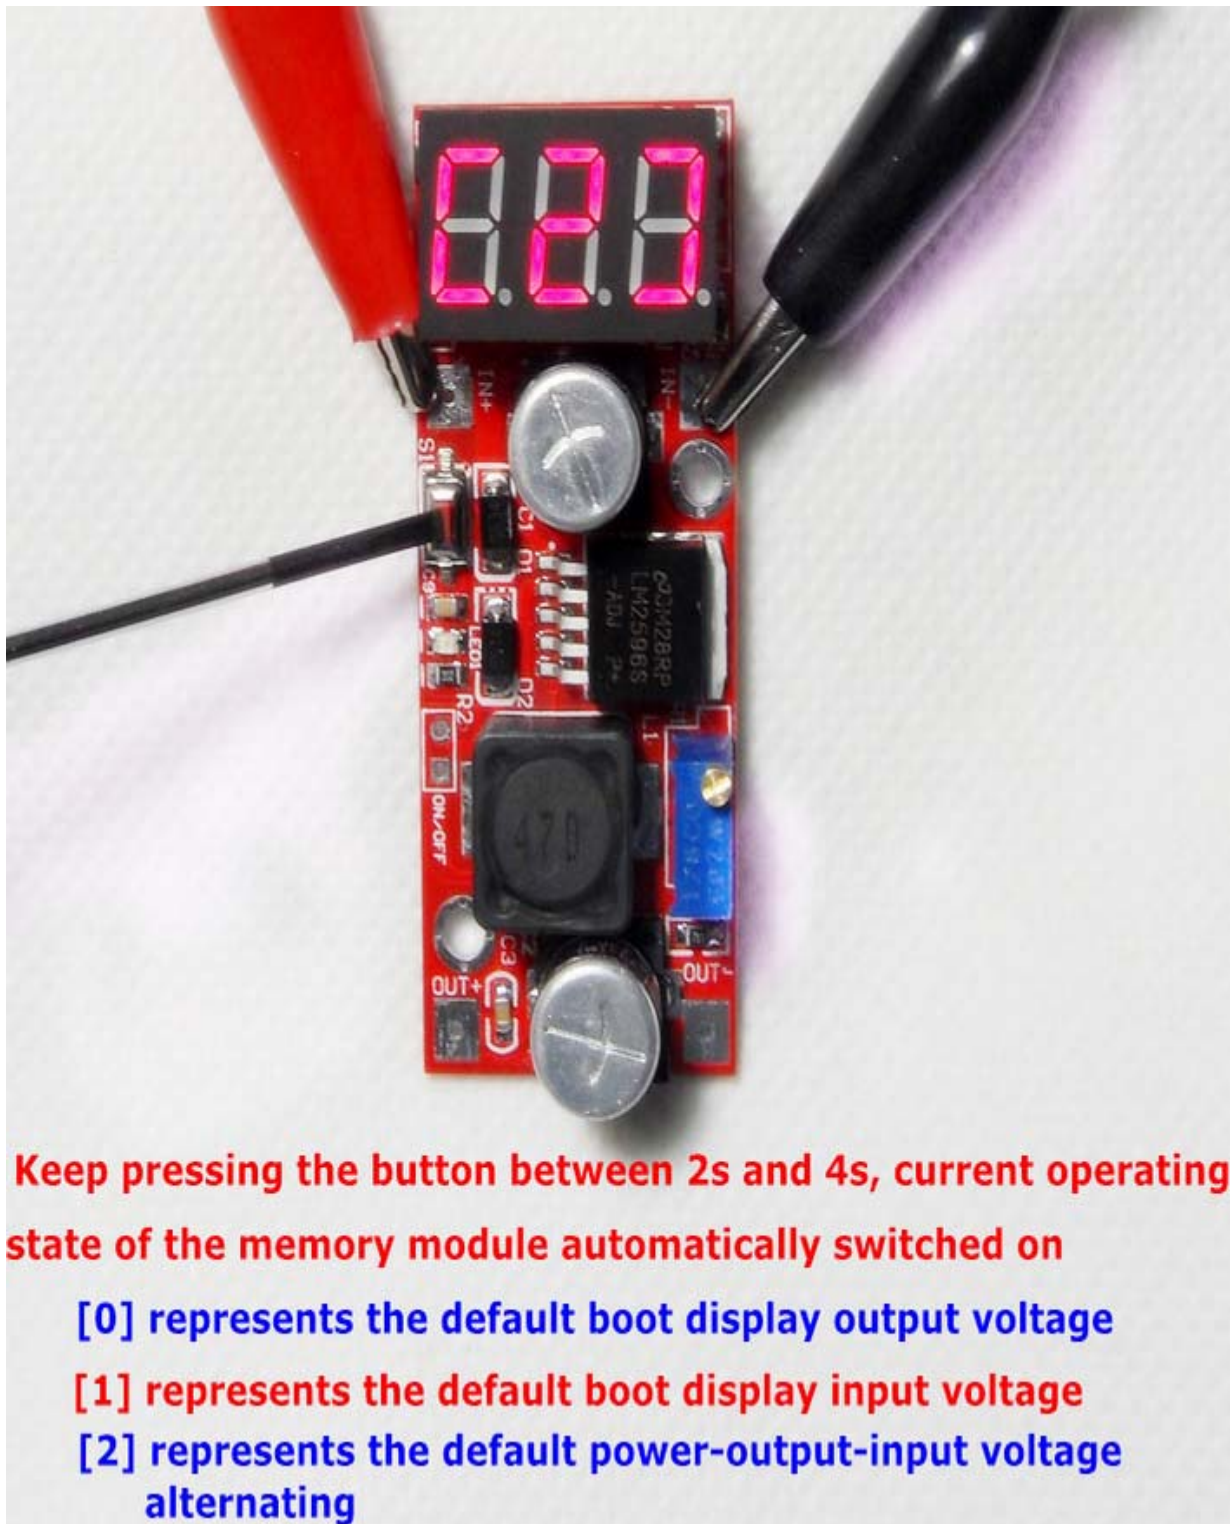

Stop working mode

Keep pressing the button until the monitor does not display numbers (long press more than 4s) and release the button. LED lights and module shuts down. The output voltage is zero. At this time, it does not perform memory function. ON / OFF output high level (3.3V), then the static power consumption is about 2mA. Click the button, the module starts working again.

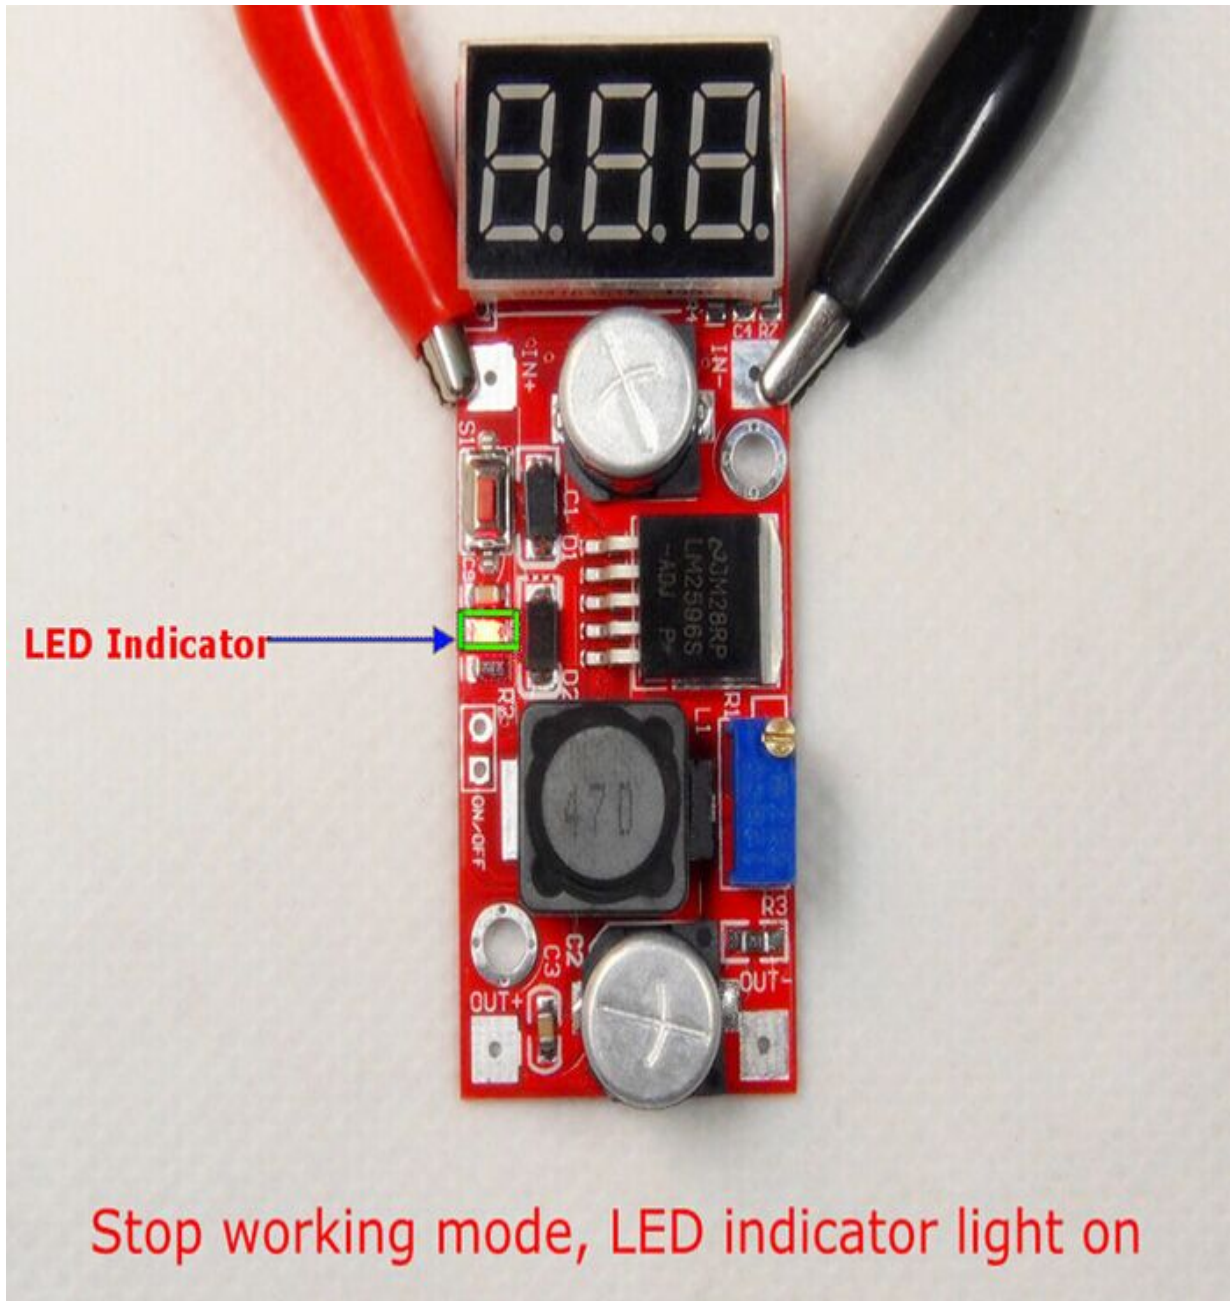

Overview



(<http://www.seedstudio.com/depot/Shenzhen-2U-t-11.html?ref=pinfo>)

Designer:
Others
Other
Products

From This Designer (<http://www.seedstudio.com/depot/Others-m-24.html?ref=pinfo>)

Weight: 18 g