



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RF Explorer Upconverter


SKU 114991131



Description

RF Explorer Upconverter is a high performance RF frequency mixer to enable input frequency ranges from 100KHz to 250MHz in RF Explorer Spectrum Analyzer and other devices such as SDR and wideband radios.

RF Upconverter Mixer Attenuator and LNA

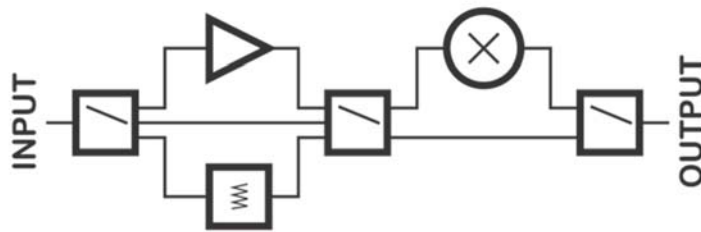

RF Explorer Upconverter is a multi-purpose device:

* Includes an Upconverter Mixer to enable frequencies 100Khz - 250MHz in your

RF Explorer Spectrum Analyzer or other devices such as RTL-SDR and converts into 530.1-780MHz

* Internal selectable Low Noise Amplifier of 25dB gain nominal, to increase sensitivity of receivers, Spectrum Analyzers, Oscilloscopes and Near Field antennas in frequencies 100KHz - 4GHz

* Internal selectable Attenuator 30dB nominal to enable large signal measurement

Features

- Internal LNA amplifier and selectable attenuator
- In Mixer mode convert frequencies from input 100KHz-250MHz up to 530.1-780MHz output
- In Bypass mode it can work in frequencies from 50KHz to 4GHz including LNA and Attenuator
- Compact size and light weight
- Solid aluminum metal case
- Mini USB port is used for powering the unit DC 5V, easy connection to a PC, wall wart or even portable power bank battery.

- Easy connection to RF Explorer with included RF adapter SNA Male-Male
- Ideal device to amplify weak signals using RF Explorer Near Field antennas

Technical Details

Dimensions	120mm x 77mm x 26mm
Weight	G.W 95g
Battery	Exclude
Input Frequency band Mixer Mode	0.1 – 250MHz
Input Frequency band: Bypass Mode	0 – 4GHz
LNA Frequency band	0 – 4GHz

Attenuator Frequency band	0 – 4GHz
Internal selectable LNA	25dB gain
Internal selectable Attenuator	30dB
Connectors	Standard SMA 50 ohms RF connectors
Absolute Max input power Bypass and Attenuator mode	+30dBm
Absolute Max input power LNA mode	+5dBm
Mixer stability and accuracy (typical)	+/-10ppm

Part List

RF Explorer Upconverter	1
SMA Male-Male adapter	1