



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

| | |
|--------------------------|----------------------------------|
| CHARACTERISTIC IMPEDANCE | 100 ± 10 ohms, Method C at 1 MHz |
| CAPACITANCE - MUTUAL | 16.0 pF/ft (nominal) |

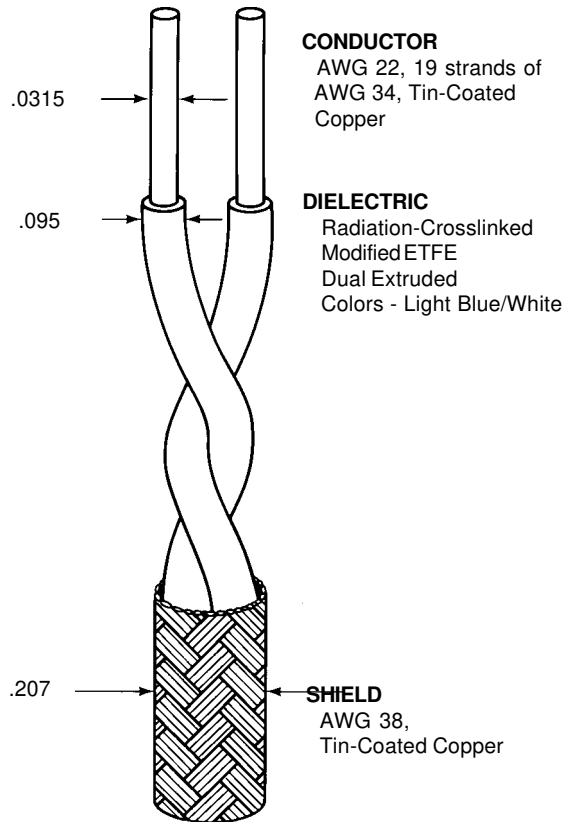

ADDITIONAL REQUIREMENTS

COMPONENT WIRE PRIOR TO CABLING
(Test Procedures per SAE AS22759)

| | |
|--|--|
| CROSSLINK PROOF | 300 ± 3°C for 1 hour, 1.00 inch mandrel, 1.75 lb., 2.5 kV dielectric test |
| LOW TEMPERATURE - COLD BEND | -65 ± 2°C for 4 hours, .750 inch mandrel, 1.00 lb., 2.5 kV dielectric test |
| SHRINKAGE | 200 ± 3°C for 1 hour, .125 inch (maximum) in 12 inches |
| INSULATION RESISTANCE | 5000 megohms for 1000 ft. (minimum) |
| INSULATION (DIELECTRIC) (total insulation) | |
| TENSILE STRENGTH | 5000 lbf/in ² (minimum) |
| ELONGATION | 50% (minimum) |
| INSULATION FLAWS | |
| SPARK TEST | 3.0 kV (rms) |
| IMPULSE TEST | 8.0 kV (peak) |

FINISHED CABLE (Test Procedures per NEMA WC27500)

| | |
|--------------------------------|-----------------------------|
| SHIELD COVERAGE | 90% (minimum) |
| VOLTAGE WITHSTAND (DIELECTRIC) | 1500 volts (rms) |
| WEIGHT | 23.6 lbs/1000 ft. (nominal) |

Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.