



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**SPECIFICATION CONTROL DRAWING** **0024B0311**

<b>CHEMINAX</b>	100 OHM, AWG 24, 7 STRANDS OF AWG 32, TWINAXIAL CABLE	Date	4-5-10
		Revision	D

THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

<b>CONSTRUCTION DETAILS</b>	<b>ELECTRICAL CHARACTERISTICS</b>
-----------------------------	-----------------------------------

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

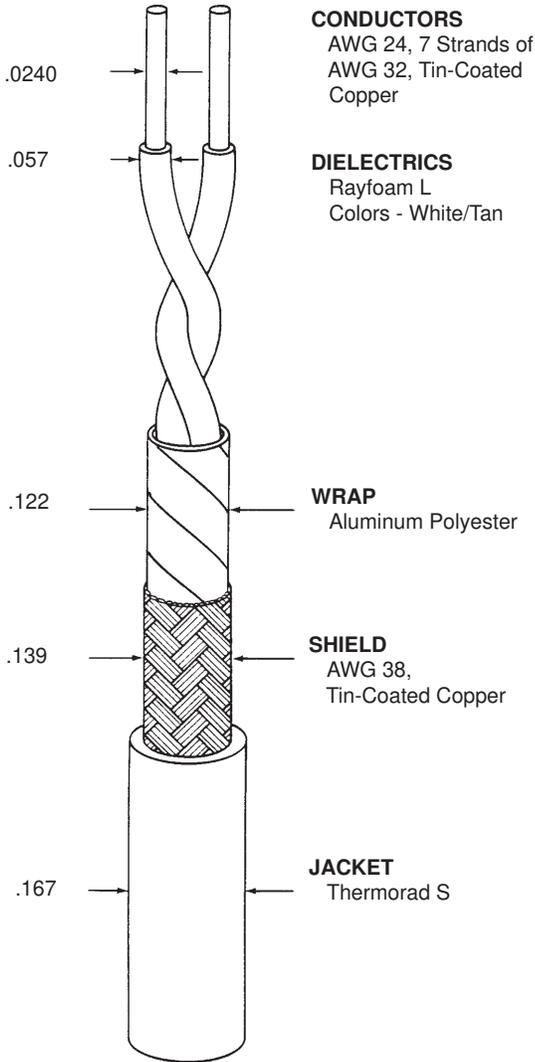

CHARACTERISTIC IMPEDANCE	100 ± 15 ohms, Method D at 1 - 100 MHz
MUTUAL CAPACITANCE	13.6 pF/ft. (nominal)
VELOCITY OF PROPAGATION	76% (nominal)
ADDITIONAL ELECTRICAL REQUIREMENTS ON PAGE 2	

**ADDITIONAL REQUIREMENTS**

<b>ELECTRICAL</b>	
CONDUCTOR RESISTANCE	26.2 ohms/1000 ft. (nominal)
INSULATION RESISTANCE	10,000 megohms (minimum) for 1000 ft.
JACKET FLAWS	
SPARK TEST	1.0 kV (rms)
IMPULSE TEST	6.0 kV (peak)
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms) (minimum)

<b>ENVIRONMENTAL</b>	
FLAMMABILITY	Method C
HEAT SHOCK	225°C
LOW TEMPERATURE-COLD BEND	-55°C/4.50 inch mandrel
VOLTAGE WITHSTAND (Post Environmental)	1000 volts (rms), 1 minute

<b>PHYSICAL</b>	
INSULATION (DIELECTRIC) (Prior to Cabling)	
ELONGATION	50% (minimum)
TENSILE STRENGTH	1000 lbf/in <sup>2</sup> (minimum)
JACKET	
ELONGATION	200% (minimum)
TENSILE STRENGTH	2000 lbf/in <sup>2</sup> (minimum)
JACKET THICKNESS	.014 inch (nominal)
SHIELD COVERAGE	90% (minimum)
WRAP	.0020 inch thick (nominal) 25% overlap (minimum) Aluminum facing out

Outer jacket color will be white (designated by a "-9" appended to the part number, e.g. 0024B0311-9) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

WEIGHT	16.2 lbs/1000 ft. (nominal)
--------	-----------------------------

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

The TE logo, Tyco Electronics, Cheminax, Raychem, Rayfoam and Thermorad are trademarks.



Raychem Wire & Cable  
501 Oakside Avenue  
Redwood City, California 94063-3800  
1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

<b>TABLE I. ELECTRICAL PARAMETERS</b>		
<b>FREQUENCY (MHz)</b>	<b>INSERTION LOSS dB/100m (maximum)</b>	<b>RETURN LOSS dB/100m (minimum)</b>
1.0	2.4	20.0
4.0	4.9	23.0
8.0	6.9	24.5
10.0	7.8	25.0
16.0	9.9	25.0
20.0	11.1	25.0
25.0	12.5	24.2
31.25	14.1	23.3
62.5	20.4	20.7
100.0	26.4	19.0

Note: Values are for reference only. Actual values shall be determined utilizing the formulas in ANSI/TIA-568-C.2.