



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



customer manual

SAFETY PRECAUTIONS READ THIS FIRST!2

1. INTRODUCTION4

2. RECEIVING AND INSPECTION5

3. USER INTERFACE INFORMATION (pRE-OPERATION TESTING)5

 3.1. LED Indicators5

 3.2. Pressure Sensor6

4. OPERATION6

 4.1. Battery Installation and Removal6

 4.2. Crimping Head Installation and Removal6

 4.3. Crimping7

5. PREVENTIVE MAINTENANCE7

 5.1. Daily Maintenance7

 5.2. Yearly Maintenance8

 5.3. Lubrication8

6. TROUBLESHOOTING8

7. REPLACEMENT AND REPAIR8

8. DECOMMISSIONING9

9. RESTRICTION ON HAZARDOUS SUBSTANCES (RoHS) INFORMATION9

10. REVISION SUMMARY9

ORIGINAL INSTRUCTIONS

SAFETY PRECAUTIONS — IMPORTANT SAFETY INFORMATION

**NOTE**

Keep all decals clean and legible, and replace them when necessary.

**DANGER
ELECTRIC SHOCK HAZARD**

This tool is not insulated. When using this unit near energized electrical lines, use proper personal protective equipment.



Failure to observe this warning could result in severe injury or death.

**DANGER
SKIN INJECTION HAZARD**

Do not use hands to check for oil leaks. Highly pressurized oil will puncture the skin causing serious injury, gangrene, or death. If injured, seek medical help immediately to remove the oil.

**DANGER
FIRE HAZARD**

Do not use solvents or flammable liquids to clean the crimping tool. Solvents or flammable liquids could ignite and cause serious injury or property damage.



Failure to heed these warnings could result in severe injury from harmful fumes or burns from flying debris.

**DANGER
FIRE HAZARD**

Do not dispose of batteries in a fire. They will vent fumes and will explode. Instead, dispose of batteries in an environmentally responsible manner or send the battery back to TE.

**DANGER**

Inspect the tool and jaws/dies before each use. Replace any worn or damaged parts. A damaged or improperly assembled tool can break and strike nearby personnel.

Failure to observe this warning could result in severe injury or death.

**CAUTION**

— Do not place the tool in a vise. The crimping tool is designed for hand-held operation.

— Protect the crimping tool from rain and moisture. Water will damage the crimping tool and battery.

Failure to observe these precautions may result in injury or property damage.

**CAUTION**

— Do not allow anything to contact the battery terminals.

— Do not immerse the batteries in liquid. Liquid may create a short circuit and damage the battery. If the batteries are immersed, contact your service center for proper handling.

— Do not place the battery into a pocket, tool pouch, or tool box with conductive objects. Conductive objects may create a short circuit and damage the battery.

— Do not place a battery on moist ground or grass. Moisture may create a short circuit and damage the battery.

Failure to observe these precautions may result in injury or property damage.

**CAUTION**

— Do not store the battery at more than 60°C [140°F]. Damage to the battery can result.

— Do not use another manufacturer's charger.

— Do not attempt to open the battery. It contains no user-serviceable parts.

Failure to observe these precautions may result in injury or property damage.

**CAUTION**

— Do not perform any service or maintenance other than as described in this manual. Injury or damage to the tool may result.

Failure to observe these precautions may result in injury or property damage.

SAFETY PRECAUTIONS — AVOID INJURY

Safeguards are designed into this application equipment to protect operators and maintenance personnel from most hazards during equipment operation. However, certain safety precautions must be taken by the operator and repair personnel to avoid personal injury, as well as damage to the equipment. For best results, application equipment must be operated in a dry, dust-free environment. Do not operate equipment in a gaseous or hazardous environment.

Carefully observe the following safety precautions before and during operation of the equipment:

- ALWAYS wear appropriate ear protection.
- ALWAYS wear approved eye protection when operating powered equipment.
- ALWAYS keep guard(s) in place during normal operation.
- ALWAYS insert power plug into a properly grounded receptacle to avoid electrical shock.
- ALWAYS turn off the main power switch and disconnect electrical cord from the power source when performing maintenance on the equipment.
- NEVER wear loose clothing or jewelry that may catch in moving parts of the application equipment.
- NEVER insert hands into installed application equipment.
- NEVER alter, modify, or misuse the application equipment.

TOOLING ASSISTANCE CENTER

CALL TOLL FREE 1-800-722-1111 (CONTINENTAL UNITED STATES AND PUERTO RICO ONLY)

The **Tooling Assistance Center** offers a means of providing technical assistance when required.

In addition, Field Service Specialists are available to provide assistance in the adjustment or repair of the application equipment when problems arise which your maintenance personnel are unable to correct.


INFORMATION REQUIRED WHEN CONTACTING THE TOOLING ASSISTANCE CENTER

When calling the Tooling Assistance Center regarding service to equipment, it is suggested that a person familiar with the device be present with a copy of the manual (and drawings) to receive instructions. Many difficulties can be avoided in this manner.

When calling the Tooling Assistance Center, be ready with the following information:

1. Customer name
2. Customer address
3. Person to contact (name, title, telephone number, and extension)
4. Person calling
5. Equipment number (and serial number if applicable)
6. Product part number (and serial number if applicable)
7. Urgency of request
8. Nature of problem
9. Description of inoperative component(s)
10. Additional information/comments that may be helpful

Crimping Tool Kit with Battery Cartridge Installed

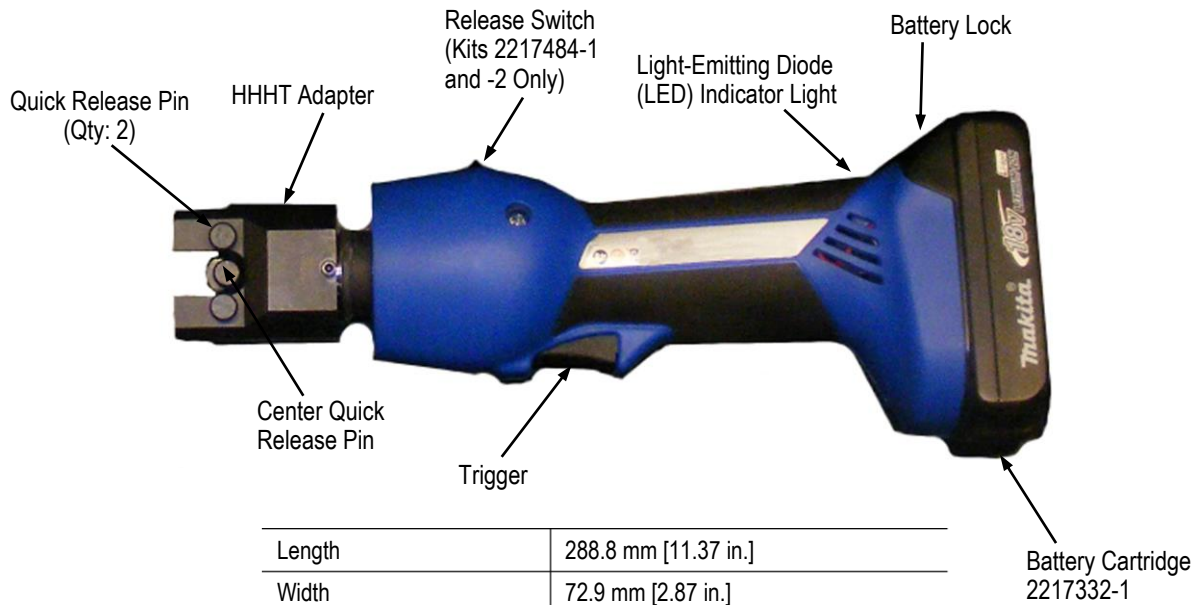

Length	288.8 mm [11.37 in.]
Width	72.9 mm [2.87 in.]
Depth	114 mm [4.5 in.]
Mass/Weight (with Battery)	1.72 kg [3.8 lbs]
Sound Level	70 dBA at 1 Meter
Vibration	< 2.5 m/s ²
Hydraulic Oil	Shell Tellus T15 or RIVOLTA S.B.H. 11
Maximum Crimping Force	15.6 kN [1.75 tons]
Average Crimping Time	2-4 seconds
Average Crimps per Charge	85-170 (Approx.)
Charging Voltage	18 V
Charging Time	15 Min. – 1.3 AH/22 Min. – 3.0 AH

Figure 1

1. INTRODUCTION

HHLT lithium-ion battery-powered crimping tool kits 2217484-[] consist of a battery crimping tool (with an HHLT adapter installed), as well as two rechargeable battery cartridges used to power the tool. See Figure 1.

Each kit has a battery charger. The battery charger part number, its voltage, and the kit region of use are listed in Figure 2. The battery-powered crimping tool may have a release switch to retract the ram.

When reading this manual, pay particular attention to **DANGER**, **CAUTION**, and **NOTE** statements.



DANGER

Denotes an imminent hazard that may result in moderate or severe injury.



CAUTION

Denotes a condition that may result in product or equipment damage.



NOTE

Highlights special or important information.

Shell and RIVOLTA are trademarks of their respective owners.

CRIMPING TOOL KIT	REGION OF USE	BATTERY CHARGER	BATTERY CHARGER VOLTAGE	RAM RETRACT SWITCH
2217484-1	North America	2217331-1	110 V	Yes
2217484-2	Europe	2217331-2	220 V	
2217484-3	North America	2217331-1	110 V	No

Figure 2

Each kit is designed to adapt the crimping head from any HHHT listed in Figure 3 for use with the battery-powered crimping tool. For crimping head information (including wire preparation, crimping, maintenance and inspection, and replacement procedure) refer to the appropriate instruction sheet for the associated hand tool.

HHHT FOR USE WITH BATTERY-POWERED CRIMPING TOOL	INSTRUCTION SHEET
46866	408-1539
59287-2, 59239-4	408-1261
90382-2	408-6561
576778, 576779	408-10040
576780, 576781, 576782	408-10040

Figure 3



NOTE

Dimensions in this customer manual are in metric units [with U.S. customary units in brackets]. Figures are not drawn to scale.

2. RECEIVING AND INSPECTION

Each kit is thoroughly inspected during and after assembly. Prior to packaging and shipping a final series of tests and inspections is made to ensure proper function of the tool. The following inspection should be performed as a safeguard against potential problems generated in transit.

1. In a well-lighted area, carefully uncrate the tool kit and inspect each component as it is removed from the crate.
2. Thoroughly inspect each component for evidence of damage that may have occurred in transit. If any of the components are damaged, file a claim against the carrier and notify TE Connectivity immediately.
3. Keep this manual and all drawings and product samples with the tool for the benefit of operation and maintenance personnel.

The crimping tool should be inspected at regularly scheduled intervals, depending on care, degree of operator skill, the type and size of the product to be crimped, and environmental conditions. At a minimum, the tool should be inspected after every 40 hours of use.

3. USER INTERFACE INFORMATION (PRE-OPERATION TESTING)

3.1. LED Indicators

A. White LED Work Light

This LED automatically turns on when the trigger is pulled. The indicator remains lit for ten seconds after the trigger is released.

B. Red LED Indicator

The tool is equipped with a special circuit board incorporating several important features. These features inform the user of the current status of the tool. The red LED signals in the cases given in Figure 4.

WHAT HAPPENS	WHAT IT MEANS
Red LED flashes for two seconds.	The battery has been inserted in the tool.
Red LED is lit constantly for 20 seconds at the end of the cycle.	Battery charge is below 17 volts at the beginning of the cycle.
Tool will not start. Red LED light remains lit for 20 seconds after trigger is released	Battery charge is below 16 volts at the beginning of the cycle.
Tool will stop. Red LED light remains lit for 20 seconds after the trigger is released.	Battery voltage drops below 13 volts during the cycle.
Tool will stop. The LED will flash for 20 seconds after the trigger is released.	Motor current exceeds 20 A during the cycle.
	Circuit has become hot.

Figure 4

3.2. Pressure Sensor

The tool is equipped with a pressure sensor that alerts the user of an incomplete crimp.

- If the tool is manually retracted before completion of a crimp, the red LED will flash for two seconds and an audible alarm will sound for two seconds.
- If the tool is unable to reach the required crimp force, the red LED will flash for two seconds and an audible alarm will sound until after the trigger is released.



NOTE

The tool has an on-board memory of previous crimp cycles and the cycle count. This information can be accessed and downloaded onto a computer using USB Adapter Module 2217896-1.

4. OPERATION

4.1. Battery Installation and Removal



NOTE

Batteries Directive 2006/66/EC introduces new requirements from September 2008 on removability of batteries from waste equipment in EU Member States. To comply with this Directive, this device is designed to allow the rechargeable battery pack to be easily removed by the end-user when it needs to be replaced.

To install the battery, slide the battery into the bottom of the crimping tool until it can go no further. There will be an audible “click” of the battery lock to indicate that the battery has been properly installed.

To remove the battery, disengage the battery lock by applying pressure on the lock toward the bottom of the crimping tool, and slide the battery away from the tool.



DANGER

Always dispose of the old battery pack in an environmentally-responsible way; in accordance with local waste regulations. Where possible, recycle the battery cartridge. Contact local authority for details of battery recycling locations.

4.2. Crimping Head Installation and Removal



CAUTION

Do not operate the crimping tool without the HHHT adapter installed. Damage to the ram or seals can result.



CAUTION

Do not operate the crimping tool without a head installed. Damage to the adapter can result.

Each kit is supplied with the HHHT adapter installed on the battery-powered hand tool. The only installation required is the crimping head.



DANGER

To avoid personal injury, be sure to exercise extreme caution when handling the crimping tool. Remove the battery before installing or removing crimping heads.

A. Installation

As supplied, the adapter has three quick-release pins installed as shown in Figure 1. The two outer pins will be used to secure the links of the crimping head (exposed portion of the crimping head) to the adapter. The center pin will be used to secure the moving jaw of the crimping head to the ram of the adapter. These pins must be removed prior to installing the crimping head.

**DANGER**

To avoid personal injury, be sure to exercise extreme caution when handling the crimping tool. Remove the battery before installing the crimping head.

1. Remove the battery from the tool.
2. Remove the quick-release pins.
3. Insert the exposed portion of the crimping head into the adapter cavity. See Figure 1.
4. Insert the two outer quick-release pins through the holes in the adapter and through the holes in the links of the crimping head.

**NOTE**

The quick-release pins will “snap” into position when they are properly inserted.

5. Insert the center quick-release pin into the adapter and through the hole in the ram and the moving jaw of the crimping head.

**NOTE**

The quick-release pin will “snap” into position when it is properly inserted.

B. Removal**DANGER**

To avoid personal injury, remove the battery before removing crimping head.

1. Remove the battery from the crimping tool.
2. Remove the quick-release pins, then remove the crimping head from the tool.

4.3. Crimping

The following procedure provides only general information concerning crimping. Refer to the instructions packaged with the crimping head for detailed information, including wire stripping dimensions and instructions for positioning the product to be crimped in the crimping area.

**DANGER**

To avoid personal injury, keep fingers clear of the crimping area.

1. Insert the product to be crimped into the crimping chamber.
2. Depress the trigger to advance the moving jaw in order to hold the product to be crimped in place. Do not deform the insulation barrel or wire barrel.
3. Place a pre-stripped wire in the barrel of the product to be crimped.
4. Depress and hold the trigger to complete the crimp. The crimping tool will return automatically to the first position of its cycle when the crimp is complete.

**NOTE**

If it is necessary to retract the ram before a crimp cycle is completed, push the release switch. Pushing the release switch will result in the complete retraction of the ram. Only kits -1 and -2 have a release switch.

**CAUTION**

This tool is not designed for continuous operation. After 100 cycles, allow the crimping tool to cool for 15 minutes.

5. PREVENTIVE MAINTENANCE**5.1. Daily Maintenance**

Perform the following maintenance on a daily basis:

1. Inspect the crimping head jaws for wear or damage such as cracks, gouges, or chips.
2. Inspect the tool for damage or leaks. If damage is detected, return the tool to TE for repair.

- Clean the tool, removing accumulations of dirt and grease from the adapter, particularly in areas where the crimping head is installed and the product is crimped. Wipe the entire tool frequently with a clean, lint-free cloth.

5.2. Yearly Maintenance

Once a year or every 10,000 cycles (whichever comes first), the adapter should be returned to TE for inspection.

5.3. Lubrication

Lubricate all pins, pivot points, and bearing surfaces with a high-quality grease. We recommend the use of Molykote paste, which is a commercially available lubricant.

Lubricate the adapter according to the following schedule:

- Adapter used in daily production should be lubricated daily
- Adapter used occasionally in daily production should be lubricated weekly
- Adapter used weekly should be lubricated monthly

6. TROUBLESHOOTING

Prior to beginning troubleshooting procedures, be sure the battery is operational.

- Be sure that the battery is charged. Re-check the battery after several minutes to ensure that the battery is holding its charge.
- Use a nonflammable contact cleaner or pencil eraser to clean the electrical contacts on the battery and crimping tool.
- Re-install the battery, and check the crimping tool again.

Refer to Figure 5 for problems, probable causes, and remedy.

PROBLEM	PROBABLE CAUSE	REMEDY
Tool is inoperative.	Dirt, contaminants, etc., in ram area of tool.	Return tool to TE for evaluation.
	Crimping tool battery contacts damaged.	Reform the contacts.
	Tool components are worn or damaged.	Return tool to TE for evaluation.
Jaws stop during operation.	Oil level is low.	Return tool to TE for evaluation.
	Air in the hydraulic system.	Pull trigger and hold retract button simultaneously. Hold for approximately 10 seconds.
Tool loses oil.	Damaged internal seal.	Return tool to TE for evaluation.

Figure 5

7. REPLACEMENT AND REPAIR



DANGER

To avoid personal injury, ALWAYS remove the battery cartridge from the tool BEFORE performing any maintenance on the crimping tool.

Replacement parts are identified in Figure 6. The recommended spares should be stocked for immediate replacement. Order replacement parts (or return parts) through your representative, or call 1-800-526-5142, or send a facsimile of your purchase order to 717-986-7605. Or write to:

CUSTOMER SERVICE (038-035)
 TYCO ELECTRONICS CORPORATION
 PO BOX 3608
 HARRISBURG PA 17105-3608

Molykote is a trademark.

PART NUMBER	DESCRIPTION
217873-1	Quick Release Pin
217873-4	Center Quick Release Pin
2217332-1	Battery
2217331-1	Charger, 120 V, North America
2217331-2	Charger, 220 V, Europe

Figure 6

For replacement parts for the crimping head, refer to the instruction sheets packaged with the specific crimping head.

8. DECOMMISSIONING

In compliance with the regulations in force in the country where the tool is used, the user must make sure that waste produced during operation is correctly disposed. Disposal of lubricants and parts removed must be carried out in compliance with the standards in force in the country where the tool is used.

9. RESTRICTION ON HAZARDOUS SUBSTANCES (RoHS) INFORMATION

Information on the presence and location of any substances subject to RoHS can be found at:
<http://www.te.com/customersupport/rohssupportcenter>

- (1) Click “Check Product Compliance and Get Statements of Compliance (SoC)”
- (2) Then click “Check Product Compliance Search Tool”

10. REVISION SUMMARY

- Updated document to corporate requirements
- Added new safety information to document
- Updated information in table in Figure 1