



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



High Frequency Ceramic Solutions

2.4GHz Impedance Matched Balun + embedded FCC/ETSI Band Pass Filter For Texas Instruments CC2620, CC2630, CC2640, CC2650 chipsets operated on INTERNAL BIAS MODE


P/N: 2450BM14G0011

Detail Specification: 3/7/2017

Page 1 of 4

For the Full App Note and Layout Files, go to: www.johansontechnology.com/ti

General Specifications

Part Number	2450BM14G0011		Phase Difference (deg.)	180 ± 10
Frequency (MHz)	2400 - 2500		Amplitude Difference	2.0 max.
Unbalanced Impedance	50 Ω		Power Capacity	2W max (CW)
Balanced Differential Impedance	Conjugate match to TI CC2620, CC2630, CC2640, CC2650, chipsets operated on INTERNAL BIAS MODE		Qty/Reel (pcs)	4,000
Insertion Loss when component measured by itself (passive insertion loss)	1.5 Typ. (1.8dB max. -40C to+85C)	Operating Temp. Range	-40 ~ +85°C	
Return Loss (dB)	9.5 min.	Storage Temp. Range	-40 ~ +85°C	
Attenuation Differential mode (dB):		Recommended Storage Conditions of Unused Product on T&R	+5 ~ +35 °C, Humidity 45-75%	
25 typ. / 14dB min. @ 4800-5000 MHz		Storage Period	18 months max.	
20 typ. / 15dB min. @ 7200-7500 MHz				


Do you need help selecting the best mini or micro 2.4GHz antenna for your application? Send us a message at: <http://www.johansontechnology.com/ask-a-question> and go to: <http://www.johansontechnology.com/antennas>

Part Number Explanation

P/N Suffix	Packaging Style	Bulk	Suffix = S	E.g. 2450BM14G0011S
		T & R	Suffix = T	E.g. 2450BM14G0011T
	Termination Style	100% Tin	Suffix = None	E.g. 2450BM14G0011(T or S)


Mechanical Dimensions

	Inches	Millimeter
L	0.063 ± 0.004	1.6 ± 0.10
W	0.031 ± 0.004	0.8 ± 0.10
T	0.024 ± 0.004	0.6 ± 0.10
a	0.008 ± 0.004	0.2 ± 0.10
b	0.008 +0.1/-0.15	0.2 +0.1/-0.15
c	0.006 ± 0.004	0.15 ± 0.10
g	0.012 ± 0.004	0.3 ± 0.10
p	0.020 ± 0.002	0.5 ± 0.05

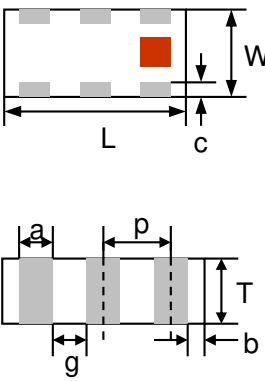

Terminal Configuration

No	Function	No	Function
1	Unbalanced Port	4	Balanced Port
2	NC	5	GND
3	Balanced Port	6	GND



Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.3

2017 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2.4GHz Impedance Matched Balun + embedded FCC/ETSI Band Pass Filter For Texas Instruments CC2620, CC2630, CC2640, CC2650 chipsets operated on INTERNAL BIAS MODE

P/N: 2450BM14G0011

Detail Specification: 3/7/2017

Page 2 of 4

Mounting Considerations

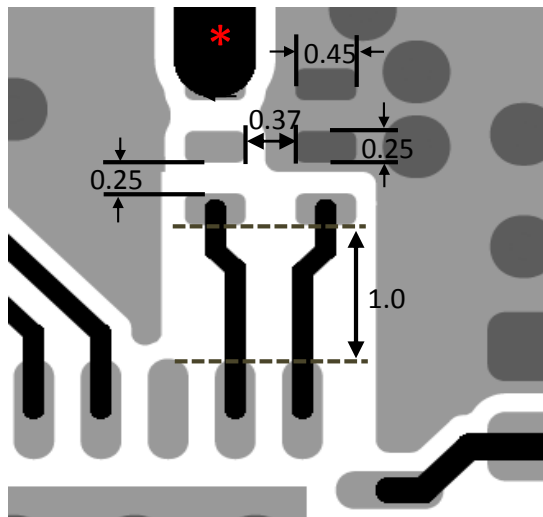

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

□ Land


● Through-hole ($\phi 0.3/\phi 0.2$) vias to GND

Would you like us to provide the layout files of the TI chipset + 2450BM14G0011? Review your layout for free? Please go to this link to contact our RF team:
www.johansontechnology.com/ask-a-question "Applications Engineering" on the drop down question type

Units in mm

Do you need the layout/gerber files of the above? Go to: www.johansontechnology.com/ti or send us a message to review your layout at: <http://www.johansontechnology.com/ask-a-question>

Measuring Diagram

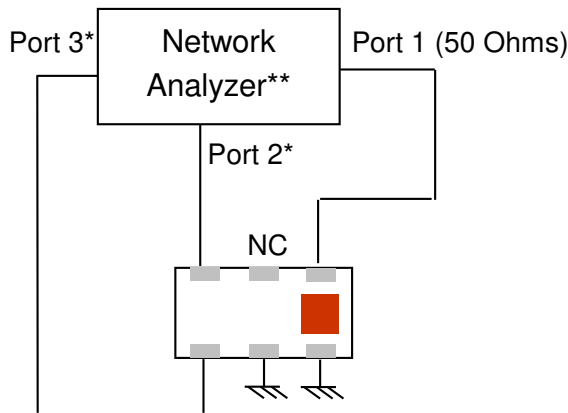

Port 1: Unbalanced Port
 Ports 2 and 3: Balanced Port

$$IL = S_{ds21}$$

$$RL = S_{ss11}$$

$$\text{Amp_balance} = \text{dB}(S(2,1)/S(3,1))$$

$$\text{Phase_balance} = \text{Phase}(S(2,1)/S(3,1))$$

* Impedance for ports 2 and 3
 = Conjugate to Balanced Impedance/2
 ** E5071C from Agilent

You can download the s-parameters at: <http://www.johansontechnology.com/ti>

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.3

2017 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4GHz Impedance Matched Balun + embedded FCC/ETSI Band Pass Filter For Texas Instruments CC2620, CC2630, CC2640, CC2650 chipsets operated on INTERNAL BIAS MODE


P/N: 2450BM14G0011

Detail Specification: 3/7/2017


Page 3 of 4

Typical Electrical Characteristics (T=25°C)

Insertion and Return Loss

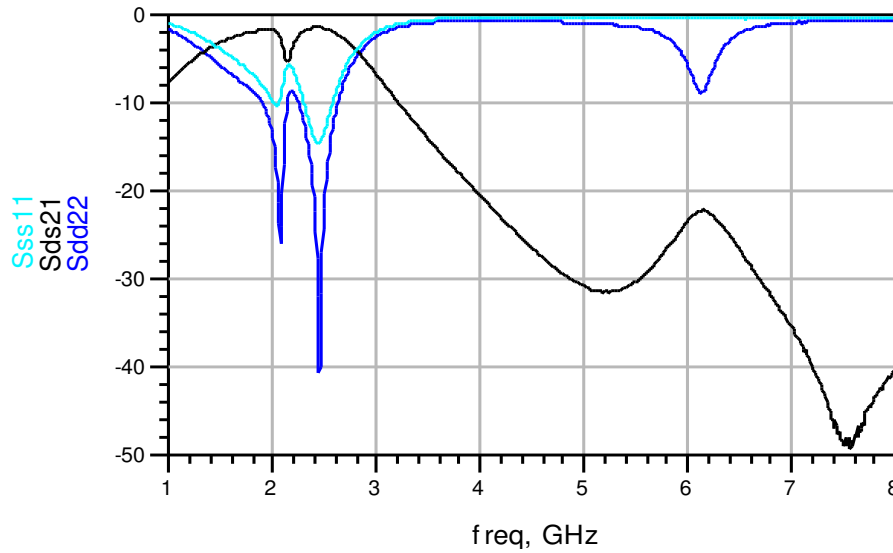

Amplitude and Phase Balance

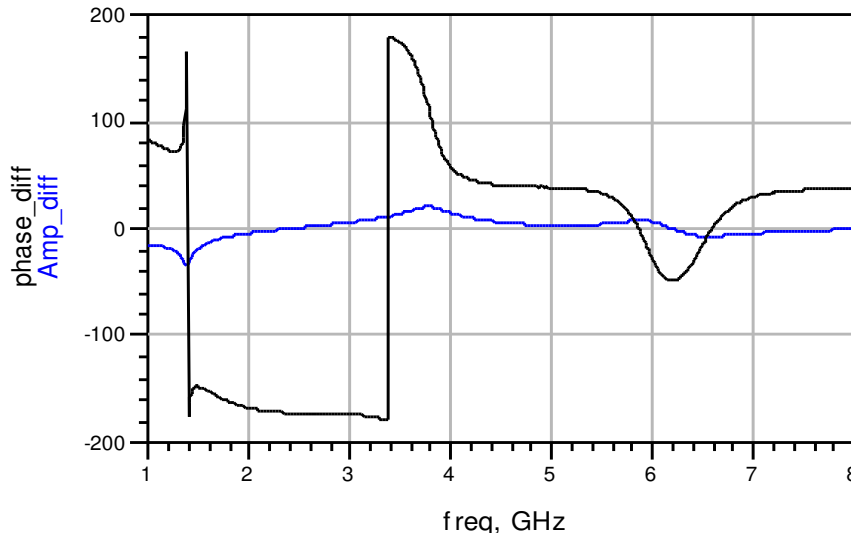

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.3

2017 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4GHz Impedance Matched Balun + embedded FCC/ETSI Band Pass Filter For Texas Instruments CC2620, CC2630, CC2640, CC2650 chipsets operated on INTERNAL BIAS MODE

P/N: 2450BM14G0011

Detail Specification: 3/7/2017

Page 4 of 4

Application Notes, Layout Files, and more

www.johansontechnology.com/ti

Packaging information

www.johansontechnology.com/tape-reel-packaging

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

www.johansontechnology.com/msl-rating

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/recommended-storage-conditions

RoHS Compliance

www.johansontechnology.com/rohs-compliance

Antenna layout and tuning techniques

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipc-antenna-services

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.3

2017 Johanson Technology, Inc. All Rights Reserved