



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Plate & Filament or Bias *261-262 Series*

## 115 V Primary



### Features

- Primary 115 VAC, 60 Hz.
- Designed for small power or bias supplies, test equipment, preamps etc.
- Models 261C6, 261E6, and 261G6 can also be used with full wave C.T. rectifiers.
- Economical , two hole, channel bracket, chassis mount.
- Minimum 5" long leads.
- Convenient 6.3 or 12.6 volt filament/auxiliary winding.

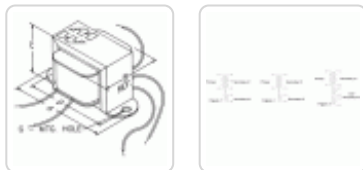

Part No.	VA	A.C. Secondary		Schematic Figure # or PDF	Dimensions					Weight (Lbs)
		#1 RMS	#2 RMS		A	B	C	D	G	
<b>261C6</b>	17.5	250V C.T. @ 45 ma	6.3V @ 1A	1	3.25	1.65	2.00	2.81	0.19	1
<b>261E6</b>	29	250V C.T. @ 91 ma	6.3V @ 1A	1	3.69	1.85	2.31	3.13	0.19	1.7
<b>261G6</b>	45	250V C.T. @ 130 ma	6.3V @ 2A	1	4.00	2.25	2.63	3.56	0.19	2
<b>261M6</b>	83	215V @ 269 ma	6.3V @ 4A	2	4.50	2.50	2.93	4.00	0.20 x 0.31	4
<b>262A12</b>	6	125V @ 15ma	12.6V @ 0.3A	See PDF	-	-	-	-	-	-
<b>262B6</b>	7	120V @ 43 ma	6.3V @ 0.3A	2	2.81	1.50	1.68	2.38	0.19	0.6
<b>262B12</b>	9	120V @ 45 ma	12.6V @ 0.3A	2	2.81	1.50	1.68	2.38	0.19	0.6
<b>262B24</b>	8	120V @ 27 ma	12/12V @ 0.2/0.2A	3	2.81	1.50	1.68	2.38	0.19	0.6
<b>262D6</b>	12	120V @ 53 ma	6.3V @ 0.9A	2	3.25	1.62	2.00	2.81	0.19	1
<b>262D12</b>	12	120V @ 53 ma	12.6V @ 0.45A	2	3.25	1.62	2.00	2.81	0.19	1
<b>262E6</b>	18	120V @ 87 ma	6.3V @ 1.2A	2	3.25	2.00	2.00	2.81	0.19	1.3
<b>262E12</b>	18	120V @ 87 ma	12.6V @ 0.6A	2	3.25	2.00	2.00	2.81	0.19	1.3
<b>262F6</b>	26	120V @ 140 ma	6.3V @ 1.5A	2	3.69	1.85	2.31	3.13	0.19	1.7
<b>262F12</b>	26	120V @ 140 ma	12.6V @ 0.75A	2	3.69	1.85	2.31	3.13	0.19	1.5

*Data subject to change without notice*

