



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Caps to Holder FEU, FEU (Med), FAU, FAC



250 VAC · 4 W / 16 A (VDE) · 600 VAC/DC · 16 A (UL/CSA)



### Standards

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA 4248-1 / no. 39

### Approvals

- VDE Certificate Number: 134125
- UL File Number: E39328

### References

Mating Cap to [FAC](#); [FAU](#); [FEU](#); [FEU \(Med\)](#); [SWG](#)

### Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


### Technical Data

Fuse-Link	5 x 20 or 6.3 x 32 mm
Rated Voltage	250VAC (VDE), 600VAC/DC (UL/CSA)
Rated current	10A (VDE), 16A (UL/CSA)
Rated Power Acceptance IEC	4 W / 16 A @ Ta 23 °C
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cap	Thermoplastic, UL 94V-0
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	

Contact Resistance	< mΩ at 20 mV
--------------------	---------------

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

### Dimension

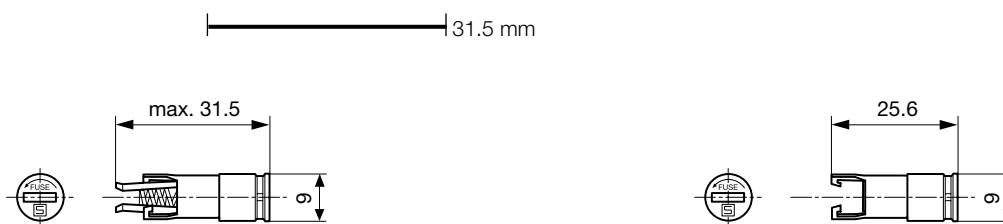

0031.1663

0031.1661, 0031.1666

### All Variants

Cap	Fuse-Link	Degree of Protection	Colour Cap	Order Number
slotted	6.3 x 32mm	IP 40	black	0031.1661
slotted	5 x 20mm	IP 40	black	0031.1663
slotted	6.3 x 32mm	IP 40	grey	0031.1666

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

### Packaging Unit

Plastic Bag (100 pcs.)