



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fuseholder Open Design, 5 x 20 mm, Solder, transparent, Cover



250 VAC · 6.3A




Description

- Screw or rivet fastening
- Solder terminals

Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Technical Data

Fuse-Link	5 x 20 mm	Soldering Methods	Iron
Mounting	Screw		Soldering Profile
Attachment	Screw or Rivet	Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Terminal	Solder	Resistance to Soldering Heat	350 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Rated Voltage	250 VAC	Contact Resistance	< 10 mΩ at 20 mV
Rated current	6.3 A	Dielectric Strength	> 3 kV (50 Hz; 1 min)
Admissible Ambient Air Temp.	-40 °C to 85 °C	Impulse Withstand Voltage	> 4 kV between L-N
Climatic Category	40/085/21 acc. to IEC 60068-1	Insulation Resistance	> 10 MΩ between L-N (500 VDC; 1 min)
Material: Socket	Thermoplastic, Nature, UL 94V-1		
Material: Cover	Thermoplastic Transparent UL 94V-0		
Material: Terminals	Tin-Plated Copper Alloy		
Unit Weight	1.5 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	 Rated Voltage, Rated current, Approvals		


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension

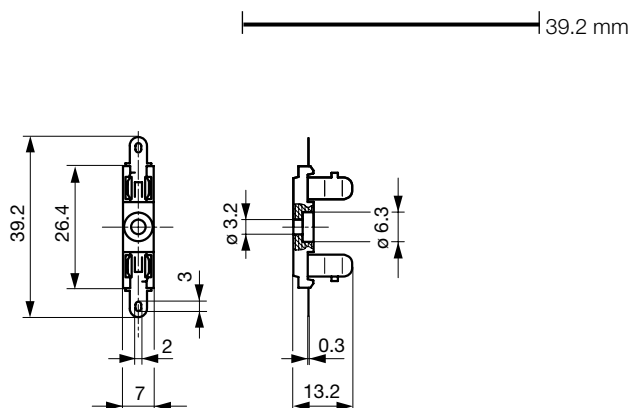


Derating Curves

without Cover

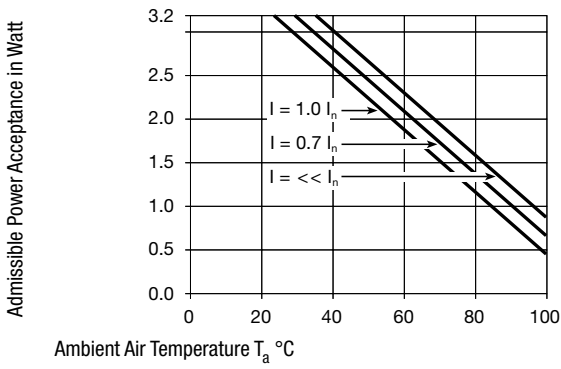

with cover

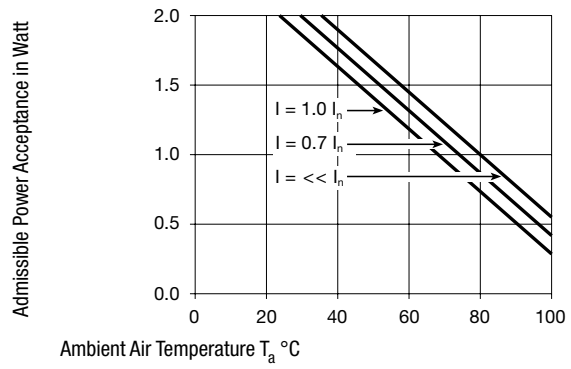

All Variants

Holder	Order Number
●	0031.5101

Most Popular.
Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (1000 pcs.)

Accessories

Description



Cover OG, UHB, UH
Cover for Holder OG (Clip) 5x20, OG (Halter) 5x20, UH, UHB