



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## FINGERSTOCK GASKETS AND METAL GROUNDING PRODUCTS

As the world's leading fabricator of fingerstock, Laird has developed highly sophisticated, and often proprietary, shielding and grounding technology. Our innovations are necessary to achieve outstanding combinations of performance parameters. From a vast selection of product configurations, platings and mounting techniques, to a full range of low compression force requirements and high transfer impedance characteristics, there is a Laird gasket or grounding product just right for the job.

Laird No Snag Series shielding gaskets offer the designer a low compression, no snag design. Provided with Sticky Fingers® self-adhesive tape, these beryllium copper shielding gaskets provide easy and secure mounting.

## MARKETS

**Telecommunications**

**Data infrastructure / storage**

**Computing**

## FEATURES AND BENEFITS

- Shielding effectiveness of > 100 db (77-012) and 80 dB (77-014) for a 100 MHz plane wave
- Easy, cost-effective installation since fasteners are not required
- Ideal as an all-purpose contact strip for metal cabinets and electronic enclosures
- Available in a wide variety of plated finishes
- Supplied in standard 24.000 in. (609.600 mm) lengths or other specified lengths


Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.(0).1628.858941  
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

## NO SNAG GASKET DIMENSIONS

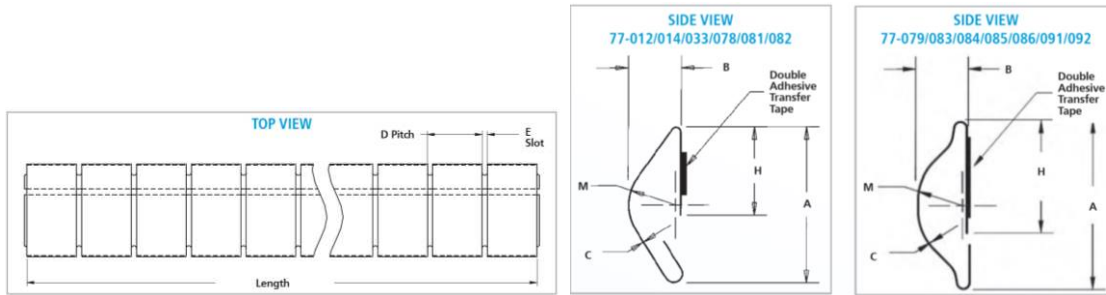

SERIES	A	B	C	D	E	H	M RADIUS	LENGTH APPROX
77-012	0.320	0.110	0.002	0.187	0.018	0.210	0.110	24.000
	(8.128)	(2.794)	(0.051)	(4.750)	(0.457)	(5.334)	(2.794)	(609.600)
*77-014	0.600	0.220	0.004	0.375	0.032	0.280	0.180	24.000
	(15.240)	(5.588)	(0.102)	(9.525)	(0.813)	(7.112)	(4.572)	(609.600)
77-033	0.370	0.130	0.002	0.250	0.025	0.210	0.110	16.000
	(9.398)	(3.302)	(0.051)	(6.350)	(0.635)	(5.334)	(2.794)	(406.400)
*77-078	0.800	0.320	0.004	0.375	0.032	0.440	0.190	24.000
	(20.320)	(8.128)	(0.102)	(9.525)	(0.813)	(11.176)	(4.826)	(609.600)
*77-079	0.320	0.100	0.035	0.156	0.018	0.210	0.100	16.000
	(8.128)	(2.540)	(0.889)	(3.962)	(0.457)	(5.334)	(2.540)	(406.500)
77-081	0.280	0.110	0.002	0.187	0.018	0.180	0.100	24.000
	(7.112)	(2.794)	(0.051)	(4.750)	(0.457)	(4.572)	(2.540)	(609.600)
*77-082	1.100	0.400	0.005	0.500	0.040	0.780	0.420	18.000
	(27.940)	(10.160)	(0.127)	(12.700)	(1.016)	(19.812)	(10.668)	(609.600)
*77-083	0.370	0.130	0.004	0.125	0.025	0.100	0.202	16.000
	(9.398)	(3.302)	(0.102)	(3.175)	(0.635)	(2.540)	(5.131)	(406.400)
*77-084	0.370	0.130	0.004	0.250	0.025	0.100	0.202	16.000
	(9.398)	(3.302)	(0.102)	(6.350)	(0.635)	(2.540)	(5.131)	(406.400)
*77-085	0.600	0.220	0.004	0.375	0.032	0.150	0.295	18.000
	(15.240)	(5.588)	(0.102)	(9.525)	(0.813)	(3.810)	(7.493)	(457.200)
*77-086	0.320	0.090	0.003	0.187	0.018	0.210	0.100	16.000
	(8.128)	(2.286)	(0.762)	(4.750)	(0.457)	(5.334)	(2.540)	(406.400)
*77-091	0.600	0.220	0.004	0.375	0.032	0.780	0.150	18.000
	(15.240)	(5.588)	(0.102)	(9.525)	(0.813)	(19.812)	(3.810)	(457.200)
*77-092	0.600	0.220	0.004	0.187	0.032	0.295	0.150	18.000
	(15.240)	(5.588)	(0.102)	(4.750)	(0.813)	(7.493)	(3.810)	(457.200)

\* Available in UltraSoft® low compression version as -78.

All dimensions shown are in inches (millimeters) unless otherwise specified.