



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# Manual Switches

## Pushbutton Switches and Indicators

Series 4

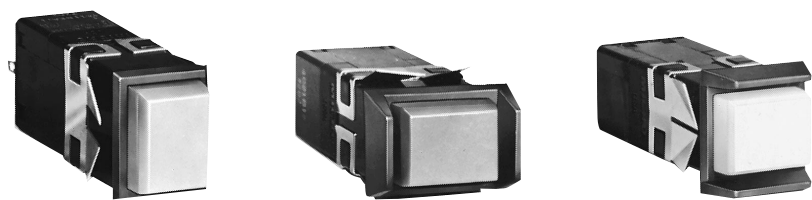

Bezel on all sides      Barriers on short sides      Barriers on long sides



Barrier on one short side      Barriers on one long side


**MOUNTING**  
Snap-in mounting. Switch or indicator is easily inserted into the cutout. Mounting clips grip the panel. No tools are needed.



Housings with a full bezel can be front panel or sub-panel mounted, individually or in strips.

Barrier type housings are normally mounted top-of-panel in strips, but can also be individually mounted. Barriers can be on either the short or long housing sides.


The drawing shows how housings with a barrier on one side are used in a strip of two or more units. The first has a barrier on two sides, while all other units have a barrier on one side, and butt against each other.



Button



Incandescent Lamp




Housing

### RELAMPING



1. Lamps and legends can be changed from panel front. When button is removed, lamp is extracted from its socket and retained in button.

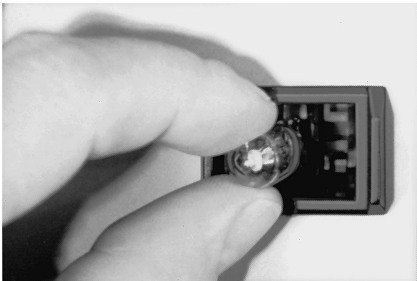

2. Ease of lamp replacement. After the inoperative lamp is automatically removed with the button, the new lamp is inserted without the use of tools.

### FEATURES

- Provides distinctive color display whether lighted or unlighted.
- Convenient front panel mounting and relamping, without tools.
- Matching indicators.
- Locked button option discourages tampering.
- Choice of transmitted color, projected color, or dead front display.
- UL recognized, CSA certified.

### ELECTRICAL RATINGS

- 5-amp silver contacts —  
5 amps res., 3 amps ind., 30 VDC.  
UL code L-4: 5 amps, 250 VAC
- 10-amp silver contacts —  
UL code L-285; 10 amps, 1/8 Hp, 125 or 250 VAC.
- Gold contacts —  
1 amp res., 0.5 amp, ind., 30 VDC  
UL code L-22: 1 amp, 125 VAC
- Gold alloy contacts —  
0.1 amp, res., 30 VDC;  
1 amp, 125 VAC.

### LOCKED BUTTON OPTION

Series 4 can be furnished with a locked button option for use in areas accessible to the public, where tampering and vandalism are problems. The housing has a special mounting clip with built-in button retainer. This mounting clip must be removed from behind panel to allow button removal. Button movement during switch operation is unaffected by locked button feature. (These units cannot be relamped from front of panel.)

Manuals

SWITCH HOUSING ORDER GUIDE

Order buttons separately from page 109.

4A11B

Switch Housing Style  
(Black)

4A11B

Bezel: all sides  
Mtg. clips: long sides

4A34B

Barrier: one long side  
Mtg. clips: short sides

4A21B

Barriers: short sides  
Mtg. clips: long sides

4A23B

Barrier: one short side  
Mtg. clips: long sides

With Housing Provision  
for Locked Button

4A13B

Bezel: all sides  
Mtg. clips: long sides

4A25B

Barriers: short sides  
Mtg. clips: long sides

4A26B

Barrier: one short side  
Mtg. clips: long sides

AA

Switching Element

Electrical Data	Action	Terminals
		.110 QC
1-Pole (SPDT), 5 a. silver contacts	Momentary	AA
	Alt. Action	BA
2-Pole (DPDT), 5 a. silver contacts	Momentary	EA
	Alt. Action	FA
2-Pole (DPDT), 10 a. silver contacts	Momentary	NA
	Alt. Action	PA

11

Incandescent Illumination

11

No lamp,  
has lamp socket for T-3¼  
wedge base lamps.

21

#161 12-volt  
T-3¼ lamp.

31

#656 or 152  
28-volt  
T-3¼ lamp

91

Unlighted,  
no lamp socket.

Example:  
**4A11BAA11**  
Black switch housing with a bezel on all sides, mounting clips on long sides, 1-pole momentary-action 5-amp silver contacts, .110" quick-connect/solder terminals, and a T-3¼ lamp socket.

**MOUNTING CLIP ORIENTATION**


Mounting clips on the **long sides** of the housing are specified when individually mounted or when the long sides of strip mounting housings parallel the long sides of the panel cutout slot. The most secure mounting is achieved when the mounting clips are on the long sides.

Mounting clips on the **short sides** of the housing are specified when short sides of strip mounted housings parallel the long sides of the panel cutout slot.


100

Honeywell • Sensing and Control • 1-800-537-6945 USA • +1-815-235-6847 International • 1-800-737-3360 Canada

BUTTON ORDER GUIDE

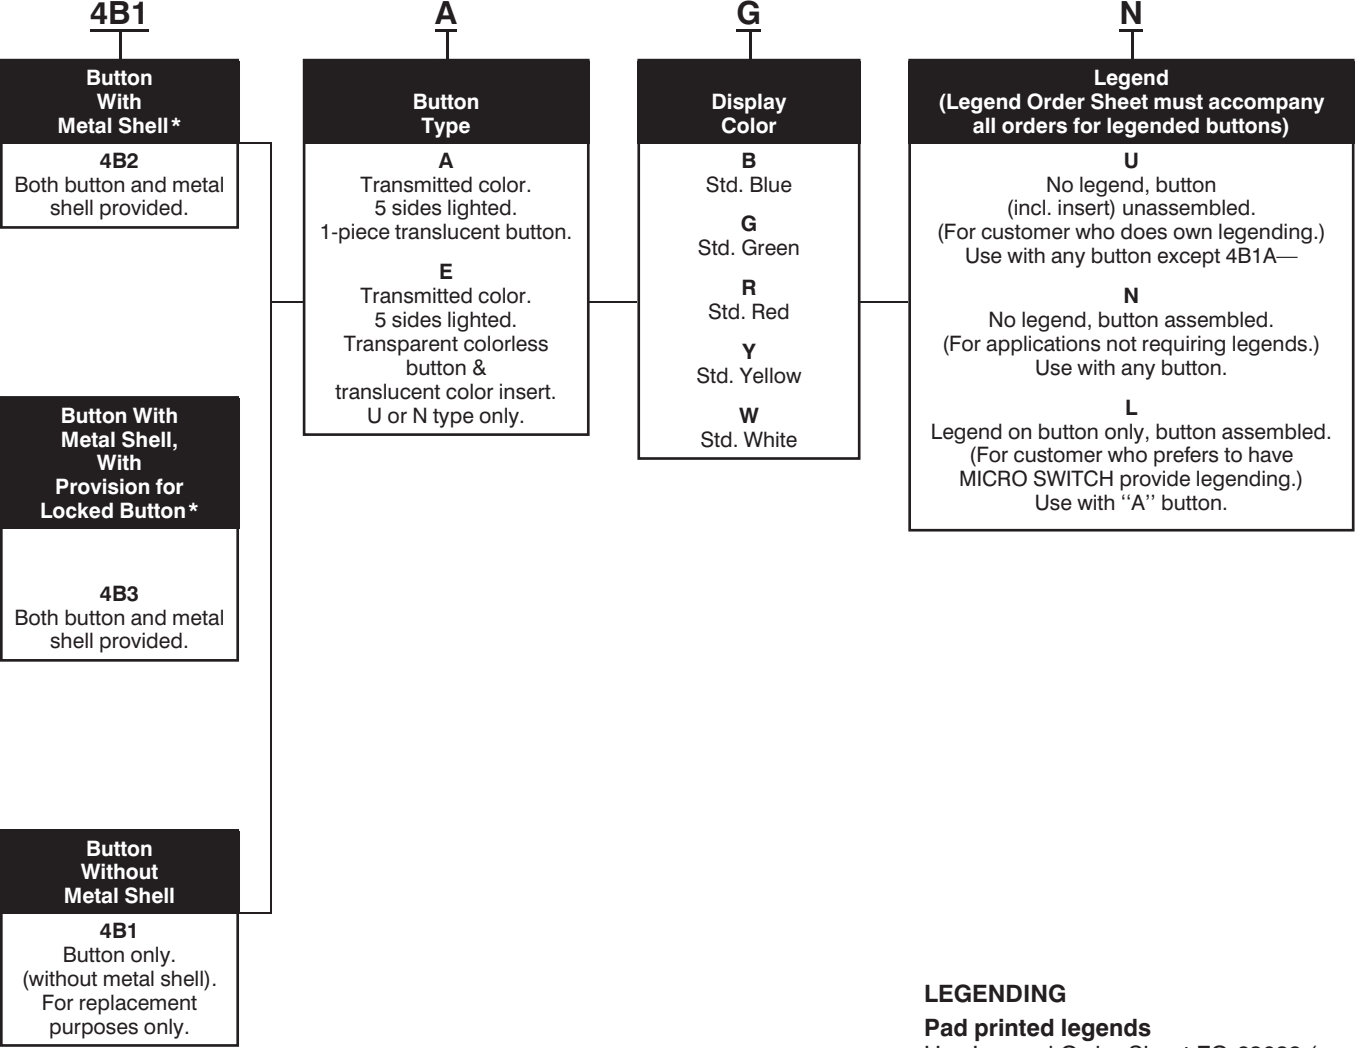

\*To be ordered with switch.

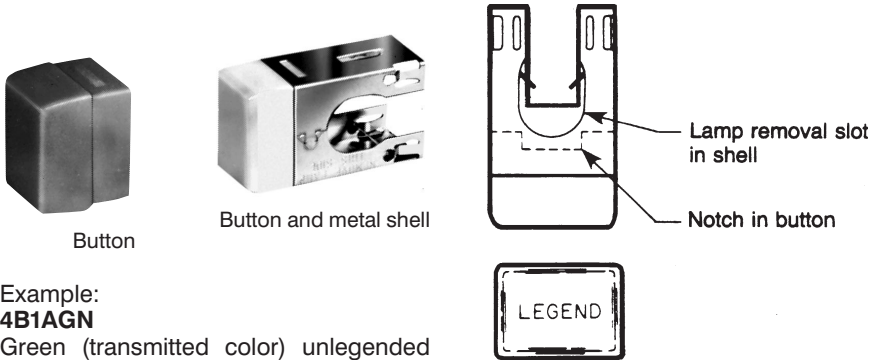

Example:  
**4B1AGN**  
Green (transmitted color) unlegended button. (If the button shell is also desired, substitute 4B2 for 4B1.)

Note: legended button should be assembled as shown above, with button notch keyed to lamp removal slot in shell. This will reduce possibility of lamp droppage when button is removed from the housing. Buttons are legended in this manner.

**LEGENDING**

**Pad printed legends**  
Use Legend Order Sheet FO-63039 (see page 110) to specify pad printed legends. Reproduce it on your office copier. Legends are oversprayed for maximum durability.

**Film legends**  
Film legends are not supplied by MICRO SWITCH. However, this service is readily available from commercial sources or may be provided through your in-house capabilities. The film should be polyester to withstand lamp heat and must be precision cut, per the dimensions shown on the next page, to insure proper alignment.

The film fits into a small undercut on the face of the button insert. The film is held securely when the outer button and insert are snapped together. (Note: It is difficult to disassemble for legend changes without damaging the parts.)

Button and insert should be snapped together prior to being assembled to the button shell.

LAMP ORDER GUIDE

Catalog Listing	Illum. Code	Incandescent Lamp Description
4Z231	31	#656 or #152 28-volt (T-3¼)

LAMP DATA


Following data was compiled from manufacturers' specifications and is provided for reference only.

Illum. Code	Industry Lamp No.	Design Volts	Incandescent Lamp Specifications			
31	656 or 152	28	Socket volts	28.0	27.0	26.0
			Amps	.06	.057	.054
			MSCP	.65	.52	.49
			Life (hrs. avg.)	5,000	7,500	10,000

METAL SHELL ORDER GUIDE

Catalog Listing	Description
4Z41	For type 4B1 buttons


MOUNTING CENTERS FOR STRIP MOUNT

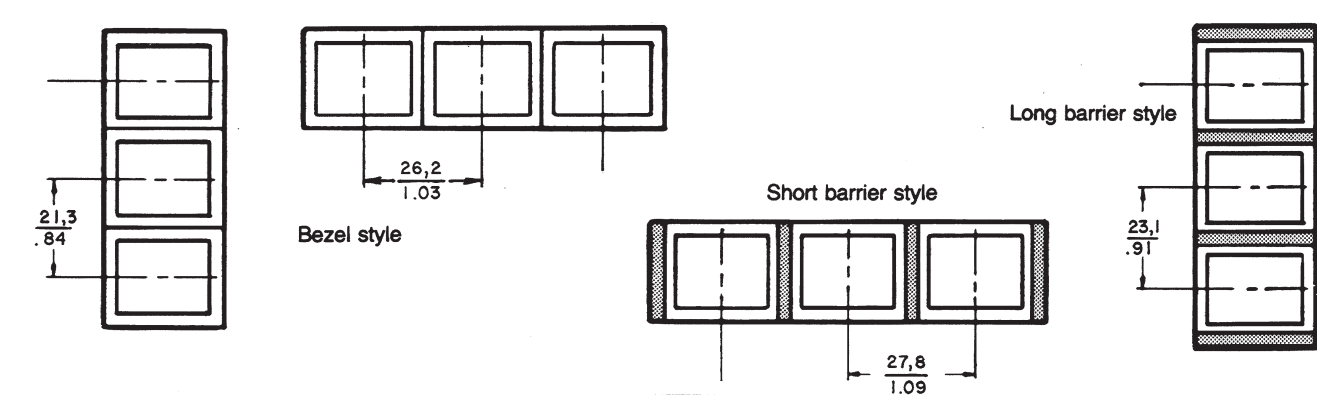

PANEL CUTOUT FOR STRIP MOUNT

	Housing Style	+0,38 +.015 Dimensions -0,00 -.000	
		Width	Length
Short Sides Abutting	Full Bezel	.79" (20,1 mm)	[No. of units x 1.03" (26,2 mm)] - .05" (1,4 mm)
	Short Barrier	.79" (20,1 mm)	[No. of units x 1.09" (27,8 mm)] - .12" (3,0 mm)
Long Sides Abutting	Full Bezel	.98" (24,8 mm)	[No. of units x .84" (21,3 mm)] - .05" (1,4 mm)
	Long Barrier	.98" (24,8 mm)	[No. of units x .91" (23,1 mm)] - .12" (3,0 mm)



PANEL CUTOUT FOR INDIVIDUAL MOUNT (any housing style)





Manual Switches
Pushbutton Switches and Indicators

Series 4

MOUNTING DIMENSIONS (For reference only)

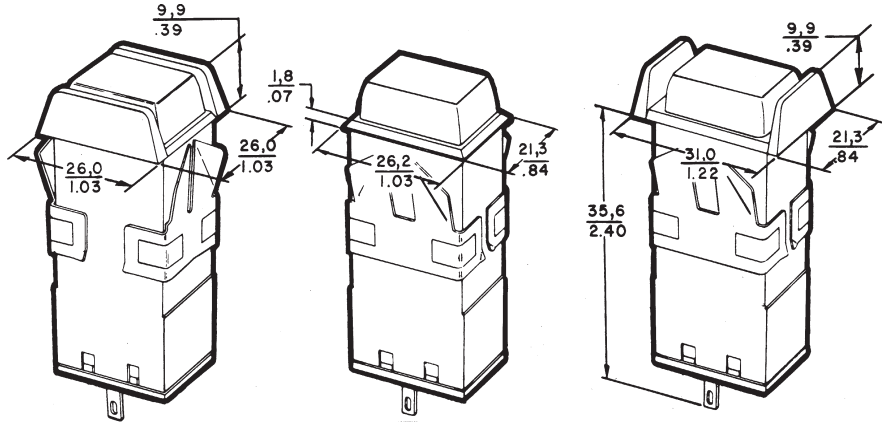

Terminal View



Panel thickness: .040-.200 in. (1.02-5.08 mm)

Key: 0,0 = mm
0.00 = inches

For proper legend orientation, Series 4 switch when viewed from front of panel, should have terminals 1 and 3 up for Figures 1 & 3 and to the right for Figures 2 and 4. (Figures 1-4 on Legend Order Sheet next page.)

Quick-connect terminals are .110" (2.8 mm) wide by .020" (0.5 mm) thick. The slot is .130" (3.3 mm) long by .048" (1.2 mm). Printed circuit terminals are: Lamp — .025 (0.6 mm) by .020" (0.5 mm); Switch — .025" (0.6 mm) square.

All terminals are plated to permit soldering.

Table with 2 columns: Type A Button (5 sides lighted) and Type E Button (5 sides lighted). It contains detailed dimension drawings for Translucent Colored Buttons, Transparent Buttons, and Translucent Colored Inserts, including legend area dimensions and film thickness specifications.

Pushbuttons

Honeywell

Series 4 Legend Order Sheet

ACCOUNT NO.

- 1. Determine if legend is to be applied to outer button shell, or to button insert.
- 2. Select appropriate Fig. No. from Chart "A" or "B", and enter on legend order chart.
- 3. Place ✓ in appropriate "TYPE SIZE" column (refer to CHART "C" for examples).
- 4. Place ✓ in BLACK or WHITE legend color column.
- 5. Indicate quantity desired.
- 6. Fill in legend description. (DO NOT EXCEED MAXIMUM NUMBER OF LINES OR

Catalog Listing 4
Customer P.O. No.
Customer Dwg. No.
MICRO SWITCH Sales Order
Line Number
Schedule No.

Customer:

Address:

Buttons: Legend on Top Surface
Buttons Insert: Legend on Top Surface
Legend Area
Type Size
Fig. 1
Fig. 2
Fig. 3
Fig. 4
A3
Modified Gothic
STANDARD SYMBOLS AVAILABLE

LEGEND ORDER CHART

Table with columns: Customer Part No, Fig No, Type Size, Ink Color, Button Qty, Legend Description, 1st Line, 2nd Line, 3rd Line, 4th Line, 5th Line

SPECIAL LEGENDS
NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.
Fig. "A"
Fig. "B"

FO-63035-B

(Signature) (Date)