



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



7 6 5 4 3 2 1

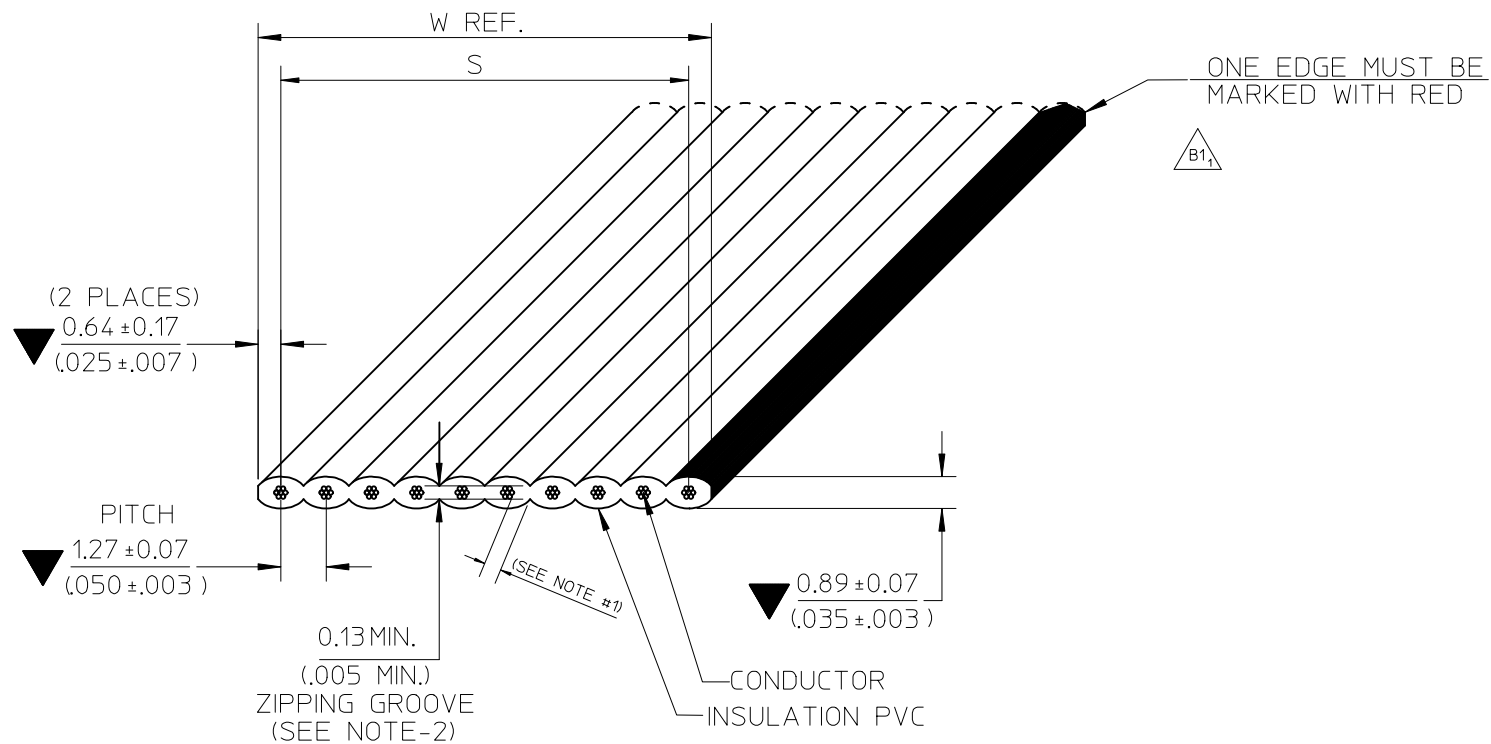

- NOTE :**
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.13mm. (.005") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

PRODUCT APPLICATION	
<input checked="" type="checkbox"/>	GENERAL USE
<input type="checkbox"/>	AUTOMOTIVE
<input type="checkbox"/>	MEDICAL DEVICE

B1	E-10-0371	B1 ₁ : REMOVE REELS MFG. IN NOG.	2011/01/25
B	E-07-0748	B ₁ : ADD NON-OPERATING TEMP.	2007/11/23
A	N/A	NEW RELEASE	2006/07/12
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL.
 EC NO: THL2011-0054
 DRWN: CPANSAKHOM 2010/10/05
 CHKD: PREECHAI 2011/01/25
 APPR: SVIRAT JAPOL 2011/03/31

QUALITY SYMBOLS	DESCRIPTION
▽=3	
▽=0	
REV	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± --- ± ---
1 PLACE	± --- ± ---
ANGULAR ± ---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/07/12
CHECKED BY	DATE
PMEECHAI	2006/07/12
APPROVED BY	DATE
SVIRAT JAPOL	2006/07/12
MATERIAL NO.	
SEE CHART	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	INCH	
TITLE		
FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED		
molex MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	SD-6800-001	1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6 5 4 3 2 1

7

6

5

4

3

2

1

SPECIFICATIONS

PHYSICAL

CONDUCTOR SPACING ----- 1.27(.050") ϕ TO ϕ
 WIRE GAUGE ----- 28 AWG(7/36) AWG, STRANDED TINNED
 INSULATION ----- P.V.C GRAY (LEAD FREE)

AGENCY




U.L. STYLE NO. ----- 2651
 TEMPERATURE RATING ----- -20°C TO 105°C
 VOLTAGE RATING ----- 300V.MAX.
 FLAMMABILITY RATING ----- VW-1

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.) ----- 68 m OHMS/FT. MAX.
 CHARACTERISTIC IMPEDANCE ----- 123 OHMS NOM. (GS)
 100 OHMS NOM. (GSG)
 CAPACITANCE ----- 9.1 pF/FT. NOM. (GS)
 17.0 pF/FT. NOM. (GSG)
 PROPAGATION DELAY ----- 1.4 ns/FT. NOM.
 INSULATION RESISTANCE ----- 10M OHMS (10FT. SAMPLE)
 DIELECTRIC WITHSTAND VOLTAGE ----- 2000 VRMS/MINUTE

GENERAL

NON-OPERATING TEMPERATURE ----- -20°C TO 105°C
 FAULTS AND/OR SPLICES ----- 1/REEL MAX. 100 $^{+3}$ ₀ FT. (30.48 $^{+0.914}$ M.)/REEL
 20FT. (6.096M.) MIN. LENGTH

SEE CHANGE DETAIL. EC NO: THL2011-0054 DRWN: CPANSAKHOM 2010/10/05 CHKD: PMEECHAI 2011/01/25 APPR: SVIRAT JAPOL 2011/03/31	DESCRIPTION B1	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
		 =  =	mm		INCH		DRAWN BY	DATE	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED			
			4 PLACES	± ---	± ---	CPANSAKHOM	2006/07/12					
			3 PLACES	± ---	± ---	CHECKED BY	DATE					
			2 PLACES	± ---	± ---	PMEECHAI	2006/07/12					
ANGULAR ± ---°				APPROVED BY	DATE	 MOLEX INCORPORATED DOCUMENT NO. SD-6800-001 SHEET NO. 2 OF 3						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO.	SEE CHART							
SIZE Δ 4 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

6

5

4

3

2

1

ENGINEERING NO.
6800-XX-XXXX
 A B C D
 A : CABLE 1.27mm. (.050") CENTERS 28AWG STRANDED TINNED
 B : CONDUCTOR SIZE (AVAILABILITY 3 THROUGH 50)
 C : CABLE LENGTH 100FT. (30.48M.)
 D : A = INCHES
 B = FEET

ENG. NO.	NO OF COND.	DIMENSIONS INCHES (MM)	DIM. W (REF)	ENGINEERING NO.	ORDER NO.
6800-3	3	2.54±0.18 (1.00±.007)	3.81(1.50)	6800-03-100B	82-28-5703
6800-4	4	3.81±0.18 (1.50±.007)	5.08(2.00)	6800-04-100B	82-28-5704
6800-5	5	5.08±0.18 (2.00±.007)	6.35(2.50)	6800-05-100B	82-28-5705
6800-6	6	6.35±0.18 (2.50±.007)	7.62(3.00)	6800-06-100B	82-28-5706
6800-7	7	7.62±0.18 (3.00±.007)	8.89(3.50)	6800-07-100B	82-28-5707
6800-8	8	8.89±0.18 (3.50±.007)	10.16(4.00)	6800-08-100B	82-28-5708
6800-9	9	10.16±0.18 (4.00±.007)	11.43(4.50)	6800-09-100B	82-28-5709
6800-10	10	11.43±0.18 (4.50±.007)	12.70(5.00)	6800-10-100B	82-28-5710
6800-11	11	12.70±0.18 (5.00±.007)	13.97(5.50)	6800-11-100B	82-28-5711
6800-12	12	13.97±0.18 (5.50±.007)	15.24(6.00)	6800-12-100B	82-28-5712
6800-13	13	15.24±0.18 (6.00±.007)	16.51(6.50)	6800-13-100B	82-28-5713
6800-14	14	16.51±0.18 (6.50±.007)	17.78(7.00)	6800-14-100B	82-28-5714
6800-15	15	17.78±0.18 (7.00±.007)	19.05(7.50)	6800-15-100B	82-28-5715
6800-16	16	19.05±0.23 (7.50±.009)	20.32(8.00)	6800-16-100B	82-28-5716
6800-17	17	20.32±0.23 (8.00±.009)	21.59(8.50)	6800-17-100B	82-28-5717
6800-18	18	21.59±0.23 (8.50±.009)	22.86(9.00)	6800-18-100B	82-28-5718
6800-19	19	22.86±0.23 (9.00±.009)	24.13(9.50)	6800-19-100B	82-28-5719
6800-20	20	24.13±0.23 (9.50±.009)	25.40(10.00)	6800-20-100B	82-28-5720
6800-21	21	25.40±0.23 (1.000±.009)	26.67(1.050)	6800-21-100B	82-28-5721
6800-22	22	26.67±0.23 (1.050±.009)	27.94(1.100)	6800-22-100B	82-28-5722
6800-23	23	27.94±0.23 (1.100±.009)	29.21(1.150)	6800-23-100B	82-28-5723
6800-24	24	29.21±0.23 (1.150±.009)	30.48(1.200)	6800-24-100B	82-28-5724
6800-25	25	30.48±0.23 (1.200±.009)	31.75(1.250)	6800-25-100B	82-28-5725
6800-26	26	31.75±0.23 (1.250±.009)	33.02(1.300)	6800-26-100B	82-28-5726
6800-27	27	33.02±0.23 (1.300±.009)	34.29(1.350)	6800-27-100B	82-28-5727
6800-28	28	34.29±0.23 (1.350±.009)	35.56(1.400)	6800-28-100B	82-28-5728
6800-29	29	35.56±0.23 (1.400±.009)	36.83(1.450)	6800-29-100B	82-28-5729
6800-30	30	36.83±0.23 (1.450±.009)	38.10(1.500)	6800-30-100B	82-28-5730
6800-31	31	38.10±0.23 (1.500±.009)	39.37(1.550)	6800-31-100B	82-28-5731
6800-32	32	39.37±0.23 (1.550±.009)	40.64(1.600)	6800-32-100B	82-28-5732
6800-33	33	40.64±0.23 (1.600±.009)	41.91(1.650)	6800-33-100B	82-28-5733
6800-34	34	41.91±0.23 (1.650±.009)	43.18(1.700)	6800-34-100B	82-28-5734
6800-35	35	43.18±0.23 (1.700±.009)	44.45(1.750)	6800-35-100B	82-28-5735
6800-36	36	44.45±0.23 (1.750±.009)	45.72(1.800)	6800-36-100B	82-28-5736
6800-37	37	45.72±0.28 (1.800±.011)	46.99(1.850)	6800-37-100B	82-28-5737
6800-38	38	46.99±0.28 (1.850±.011)	48.26(1.900)	6800-38-100B	82-28-5738
6800-39	39	48.26±0.28 (1.900±.011)	49.53(1.950)	6800-39-100B	82-28-5739
6800-40	40	49.53±0.28 (1.950±.011)	50.80(2.000)	6800-40-100B	82-28-5740
6800-41	41	50.80±0.28 (2.000±.011)	52.07(2.050)	6800-41-100B	82-28-5741
6800-42	42	52.07±0.28 (2.050±.011)	53.34(2.100)	6800-42-100B	82-28-5742
6800-43	43	53.34±0.28 (2.100±.011)	54.61(2.150)	6800-43-100B	82-28-5743
6800-44	44	54.61±0.28 (2.150±.011)	55.88(2.200)	6800-44-100B	82-28-5744
6800-45	45	55.88±0.28 (2.200±.011)	57.15(2.250)	6800-45-100B	82-28-5745
6800-46	46	57.15±0.28 (2.250±.011)	58.42(2.300)	6800-46-100B	82-28-5746
6800-47	47	58.42±0.28 (2.300±.011)	59.69(2.350)	6800-47-100B	82-28-5747
6800-48	48	59.69±0.28 (2.350±.011)	60.96(2.400)	6800-48-100B	82-28-5748
6800-49	49	60.96±0.28 (2.400±.011)	62.23(2.450)	6800-49-100B	82-28-5749
6800-50	50	62.23±0.28 (2.450±.011)	63.50(2.500)	6800-50-100B	82-28-5750

QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- mm 3 PLACES ± --- mm 2 PLACES ± --- mm 1 PLACE ± --- mm ANGULAR ± ---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY CPANSAKHOM DATE 2006/07/12 CHECKED BY PMEECHAI DATE 2006/07/12 APPROVED BY SVIRAT JAPOL DATE 2006/07/12 MATERIAL NO. SEE CHART	SCALE NTS TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED MOLEX INCORPORATED DOCUMENT NO. SD-6800-001	DESIGN UNITS INCH THIRD ANGLE PROJECTION 	SHEET NO. 3 OF 3
	SEE CHANGE DETAIL. EC NO: THL2011-0054 DRWN:CPANSAKHOM 2010/10/10/05 CHKD:PMEECHAI 2010/10/11/02 APPR:SVIRAT JAPOL 2010/10/11/02 REV B1	DESCRIPTION REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SD-6800-001	SHEET NO. 3 OF 3