



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Touch-Safe Fuseholder, 35 mm DIN-Rail, 10.3 x 38 mm, 1000 VDC



1000 VDC · 4 W · 600 VAC/DC · 30 A (UL/CSA)



Description

- Mountable on 35 mm DIN-Rail
- Easy installation and removal of fuses
- For Fuses up to 100 kA Interrupting Rating

Standards

- IEC 60269-2, -4, -6
- UL 4248-1
- CSA C22.2 no. 39

Approvals

- UL File Number: E39328
- CSA File Number: 248899

Applications

- Combiner Boxes in Photovoltaic Systems

References

Fuseholder to [ASO 10.3x38](#)

Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	10.3 x 38 mm
Mounting	DIN-Rail Mounting
Terminal	Press plate: 2 - 10 mm ² / AWG #8 - 14 (stranded), 2 - 6 mm ² , AWG #10 - 14 (solid), 2 Nm / 17.7 lb-in (max. torque)
Rated Voltage	1000VDC (Self certified), 600 VAC/DC (UL/CSA)
Rated current	30 A (UL/CSA)
Rated Power Acceptance IEC	4 W max. 4 W (self certified)
Degree of Protection	IP 20
Admissible Ambient Air Temp.	-40 °C to 130 °C
Material: Socket	Thermoplastic, UL 94V-0
Unit Weight	54 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Tech. Information

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension

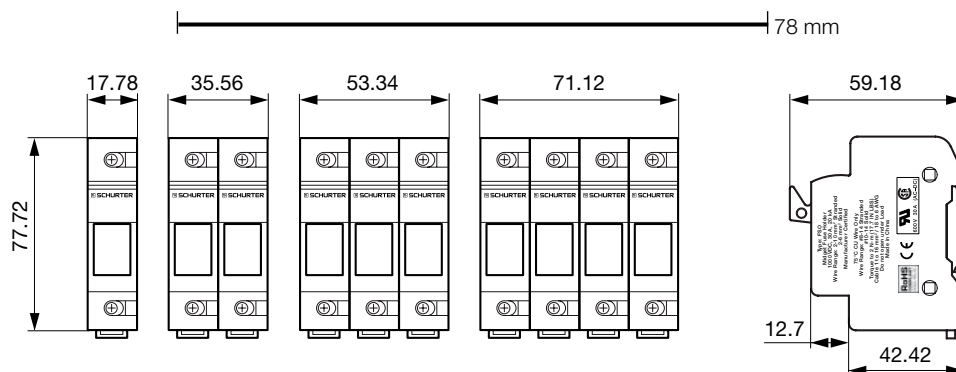

Do not open under load

All Variants

Holder	Remark	Order Number
●	1-pole	0091.0001
●	2-pole	0091.0002
●	3-pole	0091.0003
●	4-pole	0091.0004

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit	Order Number	Quantity
	0091.0001	Bulk (10 pcs.)
	0091.0002	Bulk (5 pcs.)
	0091.0003	Bulk (4 pcs.)
	0091.0004	Bulk (3 pcs.)