Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

LTR	DATE	REVISION	CHK	APD
B	6/19/00	80687C - REVISE & REDRAWN ON NEW FORMAT JMB		
C	2/06/08	000342EC-ADD 057883 COLOR CONCENTRATE TO BOM, CHG. NYLON 6/6 FROM 057333 TO 057348 DHM		

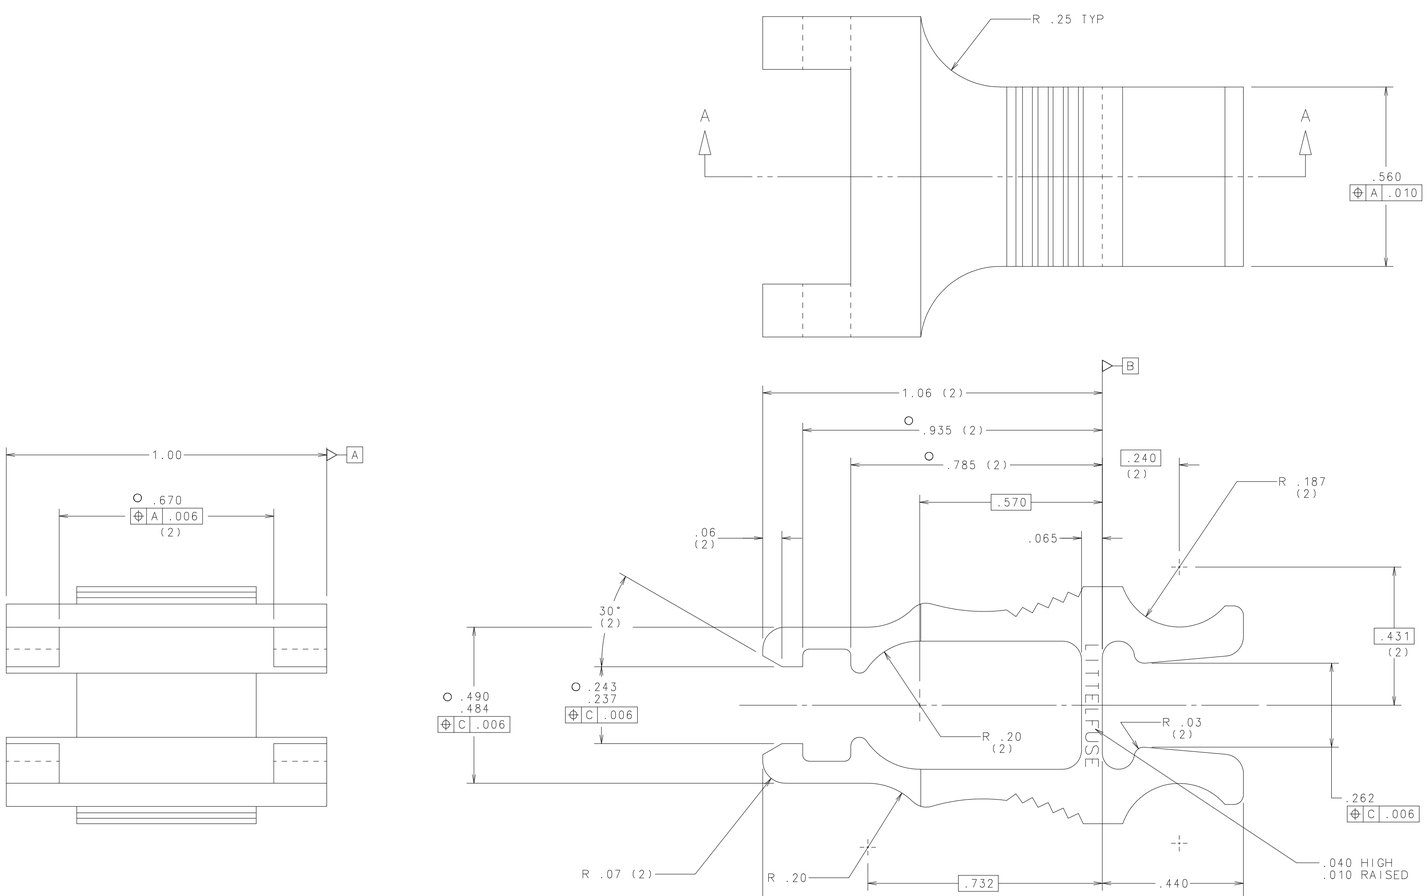

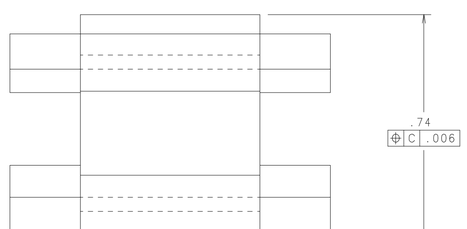

NOTES:

1. THIS FUSE PULLER IS TO MATE WITH MAXIFUSE ONLY. (L/F 0299000 SERIES)
2. UNLESS OTHERWISE SPECIFIED: ALL RADII TO BE .020 MAX.
3. 50% MAXIMUM ALLOWABLE REGRIND.

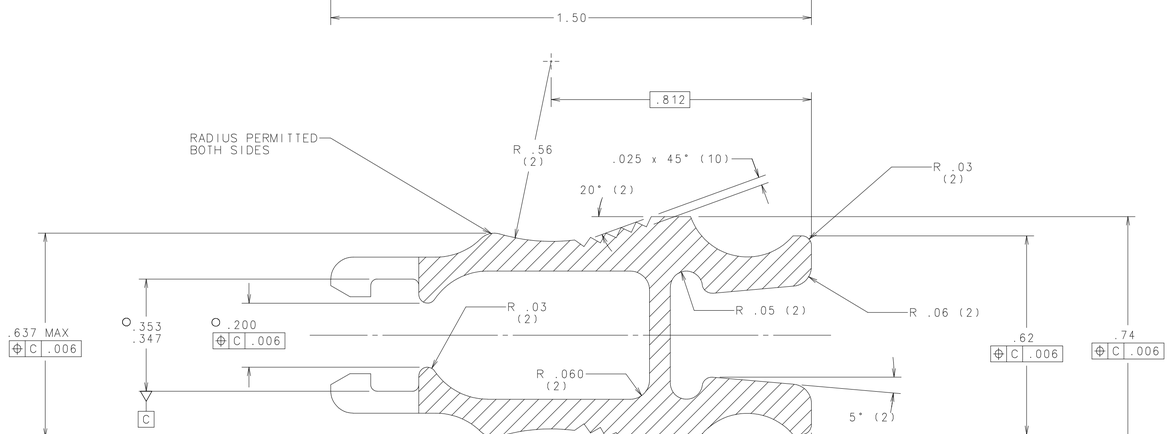

SECT. A-A

PACKAGING NOTES:
PLACE 2000 PIECES IN BAG 890-750. CLOSE WITH WIRE TIE 890-471 AND PLACE IN BOX 580143. CLOSE BOX AND SEAL WITH TAPE 088120. LABEL WITH 914-796 PRINTED TO GENERAL LABEL SPEC. LS-000003.

NO	COMPONENT NO	DESCRIPTION	QT/M	U/M
5	914-796	LABEL	.500	EAD
4	890-750	PLASTIC BAG	.500	EAD
3	580143	CARTON	.500	EAD
2	057348	NYLON 6/6	8.536	LB
1	057883	GREEN CONCENTRATE	.264	LB

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, MINIMUM CPK VALUE
SI	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS, MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

MATL SPEC

COPIES TO

1	9	18	
2	10	19	FINISH
3	12	20	
4	13	21	
5	14	23	
6	15	33	
7	16	43	
8	17	53	

DRW	DATE	SCALE
JMB	5/19/00	4:1
CHK	DATE	SUPER DR
APPD	DATE	RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.010 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE MAXIFUSE PULLER

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION C

DRWG. NO. FINAL 00970026N

D

UNCONTROLLED DOCUMENT

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED