



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Kitronik



GET LIFTING WITH THE

:MOVE Mini BULLDOZER ADD-ON

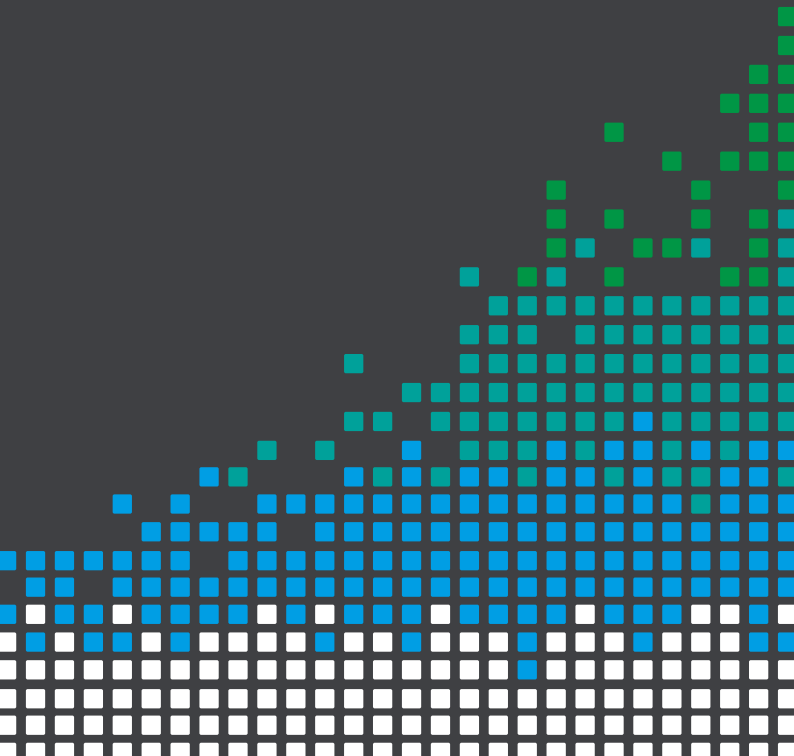


BUILD INSTRUCTIONS

1

Take the :MOVE mini and remove the front 'MOVE' piece, followed by the SERVO:LITE board, and then the interior panels. Screws on the underside will need to be removed for this.




NOTE: If not done already, the SERVO:LITE board will need to be converted for use of three servos with the pin header provided. Visit kitronik.co.uk/3servo for the online guide.




2

Slot the servo into the new left side panel, connecting the geared part onto the servo shaft. Then secure it with the small servo screw and washer.

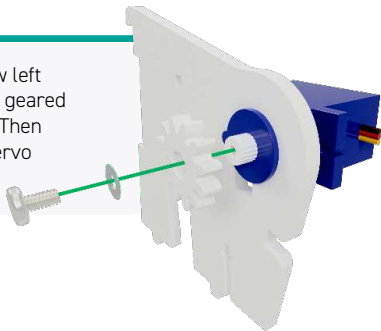


3

Gently rotate the servo gear until it reaches its maximum clockwise position.




4

Align the arm with the gear as shown in the fully down position.

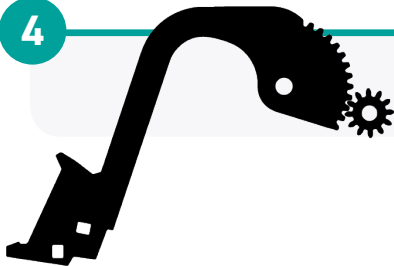

5

Use one of the M3 Countersunk screws to attach the bulldozer arm.



6

Repeat for opposite side, using the arm which does not have the gear tooth profile and one of the side panels previously removed from your :MOVE mini.




7

Using the smaller M2 screws, slot the scoops in between the two arms, and secure in place. Then slot the pen mounting plate under the servo.



8


Place some tape over the inside of each side panel and insert M2 nuts. This will help to keep the nuts secure in the slot for the next step.

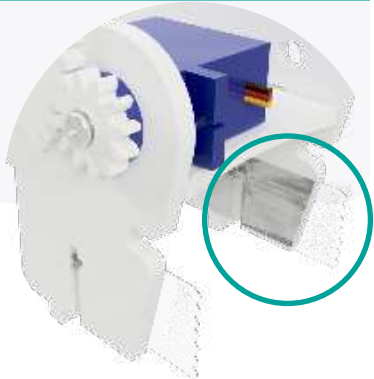

NOTE: If you do not have any tape available - you will need to disassemble your :MOVE mini and follow the instructions from the original :MOVE mini manual. Simply replace the two inner side panels with this module you have just built.

9

Slot the bulldozer module in between the two exterior sides as shown below.

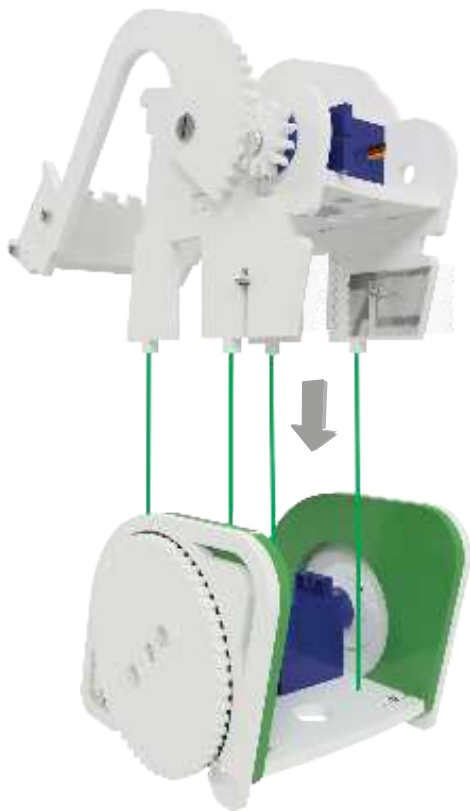

10


Use a screwdriver to tighten the screws and lock the module in place. Once secure, remove the tape.



11

Re-attach the three servo cables, and return the SERVO:LITE board back into :MOVE mini.

NOTE: With the back of the board facing you - the third servo attaches to uppermost, right, set of pins.

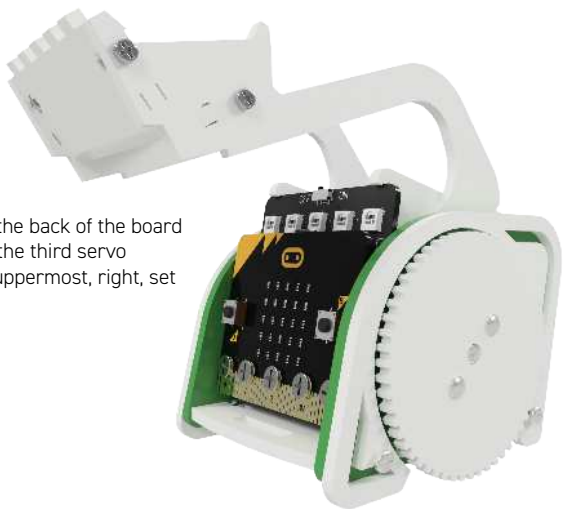

12

Replace the :MOVE piece.



13

GET CODING!
Visit [kitronik.co.uk/5624-BD](https://www.kitronik.co.uk/5624-BD) for help.





TOOLS REQUIRED

- Small Phillips Screwdriver
- Soldering Iron
- Knife



STOCK CODE

5624-BD



This accessory requires modification to the Servo:Lite board and disables the on board ZIP LEDs. Visit kitronik.co.uk/3servo for the online guide.




WARNING : Contents may inspire creativity

T: 0845 8380781

W: www.kitronik.co.uk

E: support@kitronik.co.uk



Designed & manufactured
in the UK by 



kitronik.co.uk/twitter



kitronik.co.uk/facebook



kitronik.co.uk/youtube



kitronik.co.uk/google



For more information on RoHs and CE please visit kitronik.co.uk/rohs-ce. Children assembling this product should be supervised by a competent adult. The product contains small parts so should be kept out of reach of children under 3 years old.