



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Acrylic PING))) Stand w/Hardware (#725-32008)

This handy stand, made of smoke-colored 0.220" thick acrylic, makes it easy to mount a PING)))™ Ultrasonic Distance Sensor (#28015) to your project. Mounting hardware included.

### Packing List

- (1) Acrylic PING))) Stand
- (2) 1/16" Nylon spacers (#700-00015)
- (2) 1/4" Nylon spacers (713-00005)
- (2) #4-40x5/8" black pan head screws (#710-00035)
- (2) #6-32x1/2" socket-head screws (#713-00033)


### Additional Items Required

- Small Phillips screwdriver
- 7/32" ball-end hex key (#725-00021)
- PING))) Ultrasonic Distance Sensor (#28015)
- 3-wire F/F Extension Cable (10-inch, #805-00001; 14-inch #805-00002)


### Assembly Instructions

**Step 1:** Remove the protective paper from both sides of the Acrylic PING))) stand and lay it etched-side down on a smooth, flat surface.

**Step 2:** Place a 1/16" spacer onto each of the screws, and then insert the screws through the PING))) sensor's PCB. Slide a 1/4" nylon spacer onto each screw on the other side of the PCB and then place the assembly onto the backside of the acrylic stand. The screws will cut their own threads as you screw them in with a small Phillips screwdriver. Make them snug, but do not over-tighten.

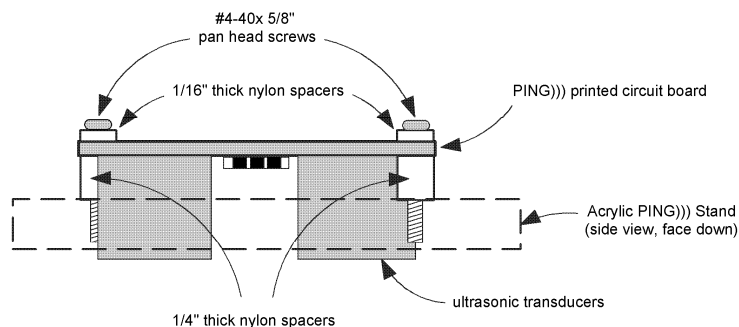

**Step 3:** Pre-drill two holes into the platform that you want to mount your acrylic PING))) stand to. The mounting holes are spaced 1.75" apart. The #6-32 x 1/2" long cap screws will extend about 1/4" into your platform. Depending on the platform, you may wish to drill a through hole, and secure with a washer and nut (not included in this kit). For a cleaner installation, simply drill a slightly under-sized hole (such as with a #36 bit), and have the screws cut their own threads as you twist them into your platform.

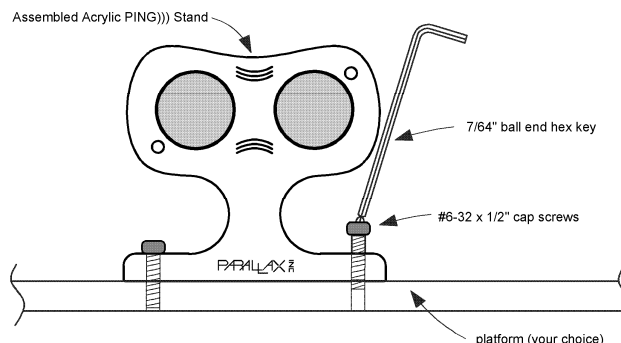

**Step 4:** Connect the cable to the PING))) sensor, and to your control board. Be sure to observe proper polarity, as shown in the PING))) sensor's documentation (#28015).