



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fuseholders

MAXI™ Fuse Splashproof Fuseholder

Ideal for high amperage MAXI™ Fuse applications where a protective cover is required for harsh under-the-hood environments.

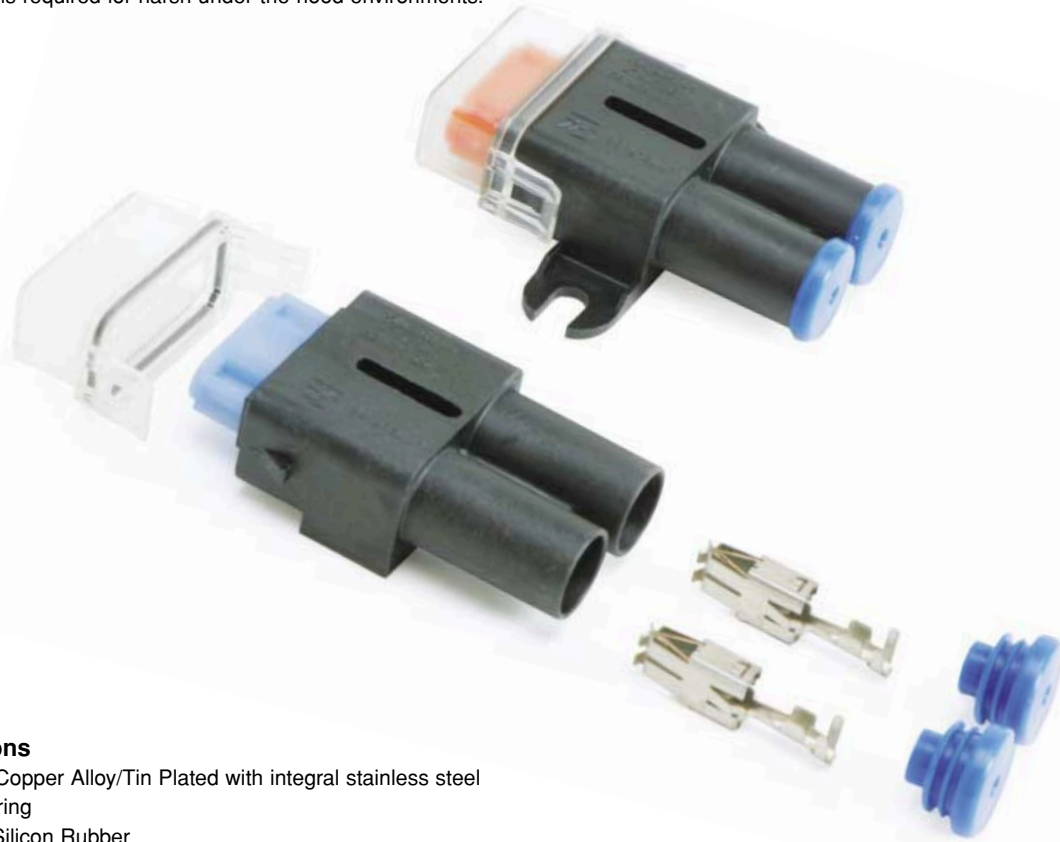

Specifications

Terminals: Copper Alloy/Tin Plated with integral stainless steel reinforcing spring

Wire Seal: Silicon Rubber

Body: Heat Stabilized Thermoplastic

Cover: Transparent Thermoplastic with integral silicon seal

Rated: 80A (Dependent on application - contact Littelfuse)

Ambient Temp.: -10°C to +80°C

Maxi Fuse Splashproof Holder for 20-70 Amp	
Part Number	Description
1520007Z	Cover with Intergal seal
1520004Z	Body with Mounting Tabs (one tab is slotted)
1520005Z	Body with Mounting Tabs
1520006Z	Body without Mounting Tabs
868-095	Blue Wire Seal for 1.5-4mm ² (14-12AWG) Wire
913-064	Single terminal 1.5-4mm ² (14-12AWG) Wire
913-064-001	Reeled terminals 1.5-4mm ² (14-12AWG) Wire
868-096	Gray Wire Seal for 4-10mm ² (10-8AWG) Wire
913-068	Single terminal 4-6mm ² (10AWG) Wire
913-068-001	Reeled terminals 4-6mm ² (10AWG) Wire
913-087	Single terminal 6-10mm ² (8AWG) Wire
913-087-001	Reeled terminals 6-10mm ² (8AWG) Wire

Maxi Fuse Splashproof Holder for 80 Amp	
Part Number	Description
1520007Z	Cover with Intergal seal
1520008Z	Body with Mounting Tabs, 80 Amp
1520009Z	Body without Mounting Tabs, 80 Amp
868-096	Gray Wire Seal for 4-10mm ² (10-8AWG) Wire
913-088	Single terminal 8mm ² (8AWG) Wire
913-088-001	Reeled terminals 8mm ² (8AWG) Wire

*It is recommended that cross linked polyethelene (GLX) insulated wire be used, as described in SAE J1128 (Type, FLY in DIN 76722) or equivalent.