



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Mini Air Ionizer Installation, Operation and Maintenance



Figure 1. SCS [960](#) Mini Air Ionizer

## Description

The SCS Mini Air Ionizer is a self-contained ionizing air blower designed to neutralize static charges from non-conductive objects. The proprietary circuitry contained in the blower generates balanced levels of positive and negative ions, and maintains correct balance despite variations in line voltage, fan speed, and emitter point condition. Meets ANS/ESD S20.20 tested per ANSI/ESD STM3.1 and ESD TR53.

The Mini Air Ionizer reduces a static charge of  $\pm 1000V$  to  $\pm 100V$  in less than 4 seconds (the discharge time) at a distance of 1 foot.

The power supply for the Mini Air Ionizer is sold separately. The Mini Air Ionizer and its accessories are available as the following item numbers:

Item	Description
<a href="#">960</a>	Mini Air Ionizer
<a href="#">960X/980X</a>	Power Adapter, 120VAC Input, 24VAC Output, North America Plug
<a href="#">770753</a>	Power Adapter, 230VAC Input, 24VAC Output, UK Plug
<a href="#">770754</a>	Power Adapter, 230VAC Input, 24VAC Output, Europe Plug

The Mini Air Ionizer requires 24VAC power supplied through a RJ-11 power socket located on the back of the unit.

It is possible to connect four (4) Mini Air Ionizers together in series and power them off of one power supply. Use the included RJ-11 cable to daisy-chain the Mini Air Ionizer to another Mini Air Ionizer. A third or fourth Mini Air Ionizer can be daisy-chained using additional RJ-11 cables.

To reduce the risk of electric shock, the power supplies use a grounding plug that has a third (grounding) pin. This plug will only fit into a grounding-type power outlet. If the plug does not fit into the outlet, contact qualified personnel to install the proper outlet. Do not alter the plug in any way. If an alternate power source is used, please make sure that it conforms to the power input requirements as listed in the Specifications section. For further questions concerning the power-input requirements, please contact [SCS Customer Service](#).

## Packaging

- 1 Mini Air Ionizer
- 1 RJ-11 Cable, 3 ft.
- 1 Certificate of Calibration

NOTE: Power adapter is not included and must be purchased separately.

## Installation

The Mini Air Ionizer mounts easily in a variety of positions using the provided tilting bracket/stand. Place the unit on the worksurface and point it at the area or object to be neutralized. Alternatively, the mounting bracket may be attached directly to or above the workstation, or on another supporting structure. Please note that placement of the Mini Air Ionizer is important in controlling its effectiveness. Its distance from the target object will affect the ionizer's performance. As distance increases, the discharge time will increase.

Connect the RJ-11 terminal from an SCS power adapter to the back of the Mini Air Ionizer, and connect the power adapter to an appropriate power outlet. Since the Mini Air Ionizer does not have a power switch, supplying power to the unit automatically turns it on.

## Operation

Supplying power to the Mini Air Ionizer through the power socket in the back of the unit will turn it on. A green monitor light is also illuminated on the front of the unit, which indicates that the ionizer is on, and that power is being applied to the emitter points.



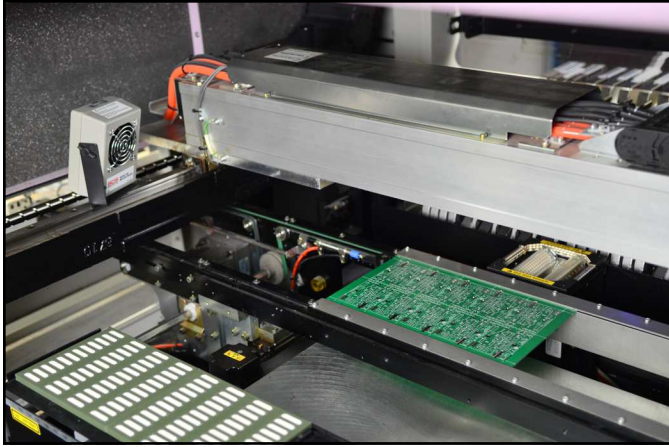


Figure 2. Using the Mini Air Ionizer inside a pick and place machine

## Maintenance

Occasional cleaning of the case and of the ionizing electrodes are the only routine maintenance procedures required.

### CLEANING THE CASE

Wipe the case with a soft cloth moistened with water. If a stronger cleaning solution is required, mild soap with water may be used. The use of any other cleaning solutions is not recommended.

### CLEANING THE EMITTER POINTS

NOTE: Disconnect the power to the ionizer whenever cleaning the emitter points.

When the emitter points become dirty, the internal circuitry of the ionizer will be automatically adjusted to emit an equal amount of positive and negative ions. Particulates on the emitter point may, however, inhibit ionization to a limited degree. The emitter points are located between the fan blades and the rear grill. A jet of clean, compressed air can be used to remove dirt on emitter points. If a more rigorous cleaning method is needed to remove particulate, clean the points with a cotton swab dampened with isopropyl alcohol. Access to the points is available through the rear grill. Be careful not to damage the points during cleaning.

## Specifications

Input Voltage and Frequency (120VAC External Adapter)	AC Power Adapter Power Input: 120VAC, 60 Hz Power Output: 24VAC, 500mA
Input Voltage and Frequency (230VAC External Adapter)	AC Power Adapter Power Input: 230VAC, 50 Hz Power Output: 24VAC, 500mA
Power Consumption	5 W
Dimensions (including bracket)	4.5" x 3.3" x 2.0" (114 mm x 84 mm x 51 mm)
Weight	0.75 lbs (0.3 kg)
Balance (Offset Voltage) at 12"	±20V
Neutralization (Discharge) Time at 12"	< 4 seconds
Maximum Airflow	24 CFM
Certifications	cULus
Country of Origin	China

### Limited Warranty, Warranty Exclusions, Limit of Liability and RMA Request Instructions

See the SCS Warranty -

<http://staticcontrol.descoindustries.com/Limited-Warranty.aspx>