



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





**Crimp Tooling Specification Sheet**  
**ATP Tooling Kit No. 19288-0220**  
**Engineering No. ATP-D-540**



**SCOPE**

Tooling: ATP Tooling Kits used with Molex Air Tape Press: (ATP 100 and 300 series) or a Molex Mylar Tape Applicator (MTA series). Refer to the appropriate tool instruction manual for installation and operation information.  
Products: Nylakrimp® and Insulkrimp® 8AWG Ring Tongue and Butt Splice Terminals.

Refer to the Product part number charts on this sheet for terminals with the barrel and tongue styles listed above.

**Testing**


**Mechanical**

The tensile test or pull test is a means of evaluating the mechanical properties of the crimped connections. The following charts show the UL Specifications for various wire sizes. The tensile strength is shown in pounds and indicates the minimum acceptable force to break or separate terminal from the conductor.

Color Code	Wire Size (AWG)	*UL - 486 A	*UL - 486 C
Red	8	90	45

\*UL - 486 A - Terminals (Copper Conductors only)

\*UL - 486 C - Butt Splices, Parallel Splices

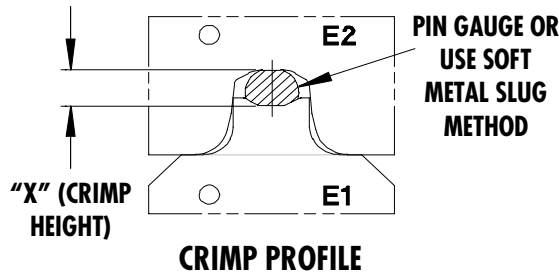

Use gauge pins or soft metal slug (solder) method to measure the "X" dimension. Verify tooling crimp height calibration by referring to the Go/No Go dimensions shown in the chart below.

Molex does not sell gauge pins contact your local industrial supplier.

Wire Range		"X" Dimension Conductor Crimp						Crimp Inspection Marking
		Mean		Go		No Go		
AWG	mm <sup>2</sup>	In	mm	In	mm	In	mm	
8	8.5	.210	5.33	.207	5.26	.217	5.51	N/A


The following is a Partial List of the Product Part Numbers and their specifications that this tooling is designed to crimp. We will be adding to this list and an up to date copy is available on [www.molex.com](http://www.molex.com).

Wire Size: 8 AWG 8.50 mm <sup>2</sup>					
Terminal No.	Terminal Eng No. (REF)	Wire Strip Length		Insul. Dia. Max.	
		In	mm	In	mm
19063-0002	D-750-06T	.438	11.11	.350	8.89
19063-0005	D-750-08T	.438	11.11	.350	8.89
19063-0008	D-750-10T	.438	11.11	.350	8.89
19063-0011	D-750-14T	.438	11.11	.350	8.89
19063-0014	D-750-56T	.438	11.11	.350	8.89
19063-0016	D-751-10T	.438	11.11	.350	8.89
19063-0018	D-751-14T	.438	11.11	.350	8.89
19063-0020	D-751-38T	.438	11.11	.350	8.89
19063-0022	D-751-56T	.438	11.11	.350	8.89
19063-0024	D-751-76T	.438	11.11	.350	8.89
19063-0027	D-752-12T	.438	11.11	.350	8.89
19063-0041	D-756-06T	.438	11.11	.350	8.89
19063-0043	D-756-08T	.438	11.11	.350	8.89
19063-0045	D-756-10T	.438	11.11	.350	8.89
19063-0047	D-756-14T	.438	11.11	.350	8.89
19067-0002	D-950-06T	.438	11.11	.350	8.89
19067-0005	D-950-08T	.438	11.11	.350	8.89
19067-0007	D-950-10T	.438	11.11	.350	8.89
19067-0011	D-950-14T	.438	11.11	.350	8.89
19067-0013	D-950-56T	.438	11.11	.350	8.89
19067-0015	D-950-56UBT	.438	11.11	.350	8.89
19067-0017	D-951-10T	.438	11.11	.350	8.89
19067-0019	D-951-14T	.438	11.11	.350	8.89
19067-0021	D-951-14UBT	.438	11.11	.350	8.89
19067-0024	D-951-38T	.438	11.11	.350	8.89
19067-0026	D-951-56T	.438	11.11	.350	8.89
19067-0027	D-951-76T	.438	11.11	.350	8.89
19067-0036	D-956-06T	.438	11.11	.350	8.89
19067-0038	D-956-08T	.438	11.11	.350	8.89
19067-0040	D-956-10T	.438	11.11	.350	8.89
19067-0042	D-956-14T	.438	11.11	.350	8.89
19071-0133	D-650-06XT	.438	11.11	0.385	9.78
19071-0135	D-650-08XT	.438	11.11	0.385	9.78
19071-0138	D-650-10XBT	.438	11.11	0.385	9.78
19071-0139	D-650-10XT	.438	11.11	0.385	9.78
19071-0142	D-650-14XBT	.438	11.11	0.385	9.78
19071-0143	D-650-14XT	.438	11.11	0.385	9.78
19071-0145	D-650-56XT	.438	11.11	0.385	9.78
19071-0147	D-651-10XT	.438	11.11	0.385	9.78
19071-0149	D-651-14XT	.438	11.11	0.385	9.78
19071-0152	D-651-38XT	.438	11.11	0.385	9.78
19071-0155	D-651-56XT	.438	11.11	0.385	9.78
19071-0157	D-651-76XT	.438	11.11	0.385	9.78
19071-0175	D-656-04XT	.438	11.11	0.385	9.78
19071-0177	D-656-06XT	.438	11.11	0.385	9.78
19071-0179	D-656-08XT	.438	11.11	0.385	9.78
19071-0181	D-656-10XT	.438	11.11	0.385	9.78
19071-0184	D-656-14XT	.438	11.11	0.385	9.78
19154-0042	D-654XT	.432	10.97	0.385	9.78

**Parts List**

Item	Order No.	Engineering No.	Description	Qty
	<b>19288-0220</b>	<b>19288-0220</b>	<b>ATP Tooling Kit</b>	<b>REF</b>
1	19288-0222	19288-0222	Conductor Punch	1
2	19288-0221	19288-0221	Conductor Anvil	1
3	N/A	N/A	#10-32 by 5/8" LG. SHCS	2**
4	N/A	N/A	O-ring 1/16 W. by 9/32" O.D.	2**

\*\* The following purchased parts are available from an Industrial supply company such as MSC 1-800-645-7270

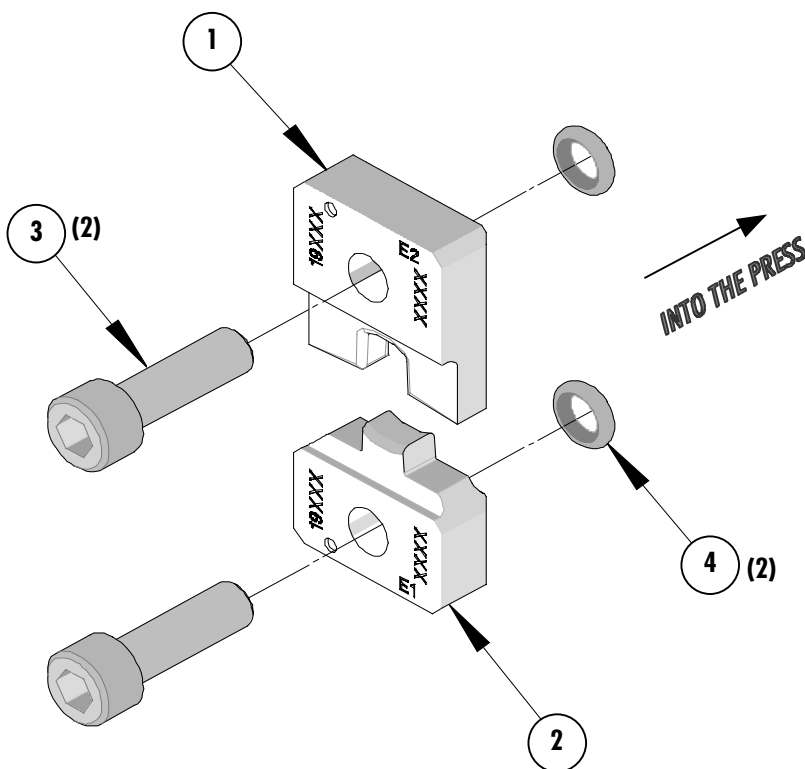

**Molex Application Tooling Group**

1150 E. Diehl Road  
 Naperville, IL 60563  
 Tel: (630) 969-4550  
 Fax: (630) 505-0049

Visit our Web site at <http://www.molex.com>