



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

IR2117(S)/IR2118(S) & (PbF)

SINGLE CHANNEL DRIVER

Features

- Floating channel designed for bootstrap operation
- Fully operational to +600V
- Tolerant to negative transient voltage
- dV/dt immune
- Gate drive supply range from 10 to 20V
- Undervoltage lockout
- CMOS Schmitt-triggered inputs with pull-down
- Output in phase with input (IR2117) or out of phase with input (IR2118)
- Also available LEAD-FREE


Description

The IR2117/IR2118(S) is a high voltage, high speed power MOSFET and IGBT driver. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS outputs. The output driver features a high pulse current buffer stage designed for minimum cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high or low side configuration which operates up to 600 volts.


Product Summary

V _{OFFSET}	600V max.
I _O +/-	200 mA / 420 mA
V _{OUT}	10 - 20V
t _{on/off} (typ.)	125 & 105 ns

Packages




8-Lead PDIP
IR2117/IR2118



8-Lead SOIC
IR2117S/IR2118S

Typical Connection

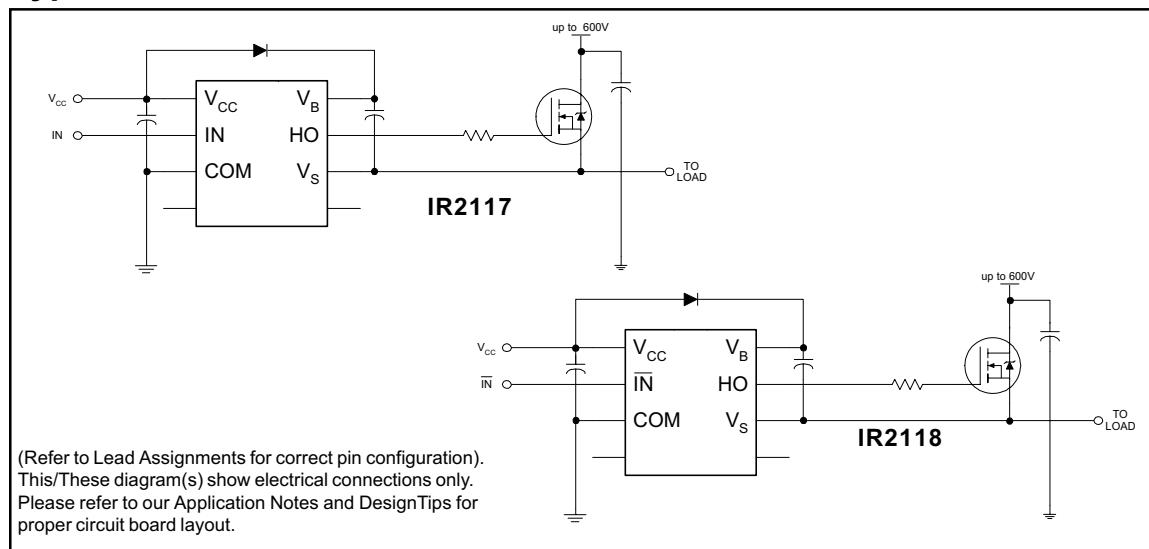

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Additional information is shown in Figures 5 through 8.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply voltage	-0.3	625	V
V_S	High side floating supply offset voltage	$V_B - 25$	$V_B + 0.3$	
V_{HO}	High side floating output voltage	$V_S - 0.3$	$V_B + 0.3$	
V_{CC}	Logic supply voltage	-0.3	25	
V_{IN}	Logic input voltage	-0.3	$V_{CC} + 0.3$	
dV_s/dt	Allowable offset supply voltage transient (figure 2)	—	50	V/ns
P_D	Package power dissipation @ $T_A \leq +25^\circ\text{C}$	—	1.0	W
	(8 lead PDIP) (8 lead SOIC)	—	0.625	
R_{thJA}	Thermal resistance, junction to ambient	—	125	$^\circ\text{C}/\text{W}$
	(8 lead PDIP) (8 lead SOIC)	—	200	
T_J	Junction temperature	—	150	$^\circ\text{C}$
T_S	Storage temperature	-55	150	
T_L	Lead temperature (soldering, 10 seconds)	—	300	

Recommended Operating Conditions

The input/output logic timing diagram is shown in figure 1. For proper operation the device should be used within the recommended conditions. The V_S offset rating is tested with all supplies biased at 15V differential.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply absolute voltage	$V_S + 10$	$V_S + 20$	V
V_S	High side floating supply offset voltage	Note 1	600	
V_{HO}	High side floating output voltage	V_S	V_B	
V_{CC}	Logic supply voltage	10	20	
V_{IN}	Logic input voltage	0	V_{CC}	
T_A	Ambient temperature	-40	125	$^\circ\text{C}$

Note 1: Logic operational for V_S of -5 to +600V. Logic state held for V_S of -5V to $-V_{BS}$. (Please refer to the Design Tip DT97-3 for more details).

IR2117(S)/IR2118(S) & (PbF)

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS}) = 15V, C_L = 1000 pF and T_A = 25°C unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Figure 3.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-on propagation delay	—	125	200	ns	V_S = 0V
t_{off}	Turn-off propagation delay	—	105	180		V_S = 600V
t_r	Turn-on rise time	—	80	130		
t_f	Turn-off fall time	—	40	65		

Static Electrical Characteristics


V_{BIAS} (V_{CC} , V_{BS}) = 15V and T_A = 25°C unless otherwise specified. The V_{IN} , V_{TH} and I_{IN} parameters are referenced to COM. The V_O and I_O parameters are referenced to COM and are applicable to the respective output leads: HO or LO.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	input voltage - logic "1" (IR2117) logic "0" (IR2118)	9.5	—	—	V	
V_{IL}	Input voltage - logic "0" (IR2117) logic "1" (IR2118)	—	—	6.0		
V_{OH}	High level output voltage, V_{BIAS} - V_O	—	—	100	mV	I_O = 0A
V_{OL}	Low level output voltage, V_O	—	—	100		I_O = 0A
I_{LK}	Offset supply leakage current	—	—	50	μA	V_B = V_S = 600V
I_{QBS}	Quiescent V_{BS} supply current	—	50	240		V_{IN} = 0V or V_{CC}
I_{QCC}	Quiescent V_{CC} Supply Current	—	70	340		V_{IN} = 0V or V_{CC}
I_{IN+}	Logic "1" input bias current (IR2117) (IR2118)	—	20	40		V_{IN} = V_{CC}
I_{IN-}	Logic "0" input bias current (IR2117) (IR2118)	—	—	1.0		V_{IN} = 0V
V_{BSUV+}	V_{BS} supply undervoltage positive going threshold	7.6	8.6	9.6		V_{IN} = 0V
V_{BSUV-}	V_{BS} supply undervoltage negative going threshold	7.2	8.2	9.2		V_{IN} = V_{CC}
V_{CCUV+}	V_{CC} supply undervoltage positive going threshold	7.6	8.6	9.6		
V_{CCUV-}	V_{CC} supply undervoltage negative going threshold	7.2	8.2	9.2		
I_{O+}	Output high short circuit pulsed current	200	250	—	mA	V_O = 0V V_{IN} = Logic "1" $PW \leq 10 \mu s$
I_{O-}	Output low short circuit pulsed current	420	500	—		V_O = 15V V_{IN} = Logic "0" $PW \leq 10 \mu s$


IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

Functional Block Diagram (IR2117)

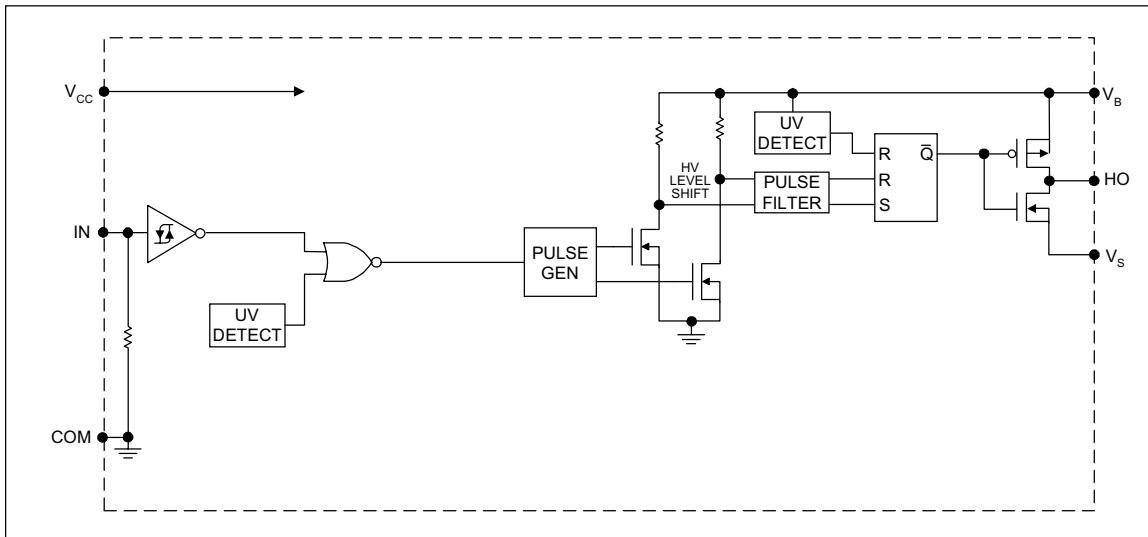

Functional Block Diagram (IR2118)


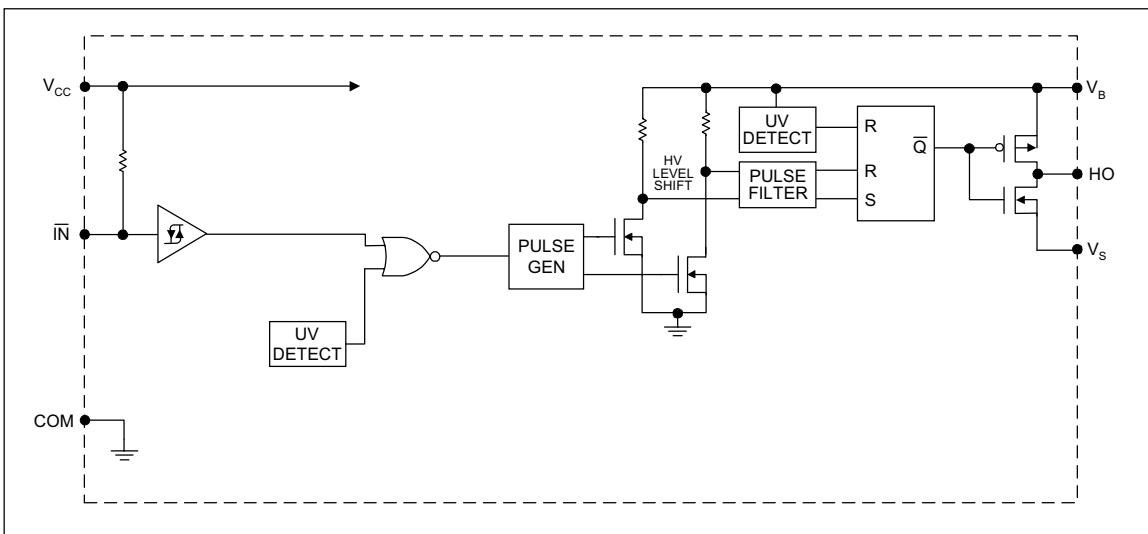


IR2117(S)/IR2118(S) & (PbF)

Lead Definitions

Symbol	Description
V _{CC}	Logic and gate drive supply
IN	Logic input for gate driver output (HO), in phase with HO (IR2117)
IN̄	Logic input for gate driver output (HO), out of phase with HO (IR2118)
COM	Logic ground
V _B	High side floating supply
HO	High side gate drive output
V _S	High side floating supply return

Lead Assignments

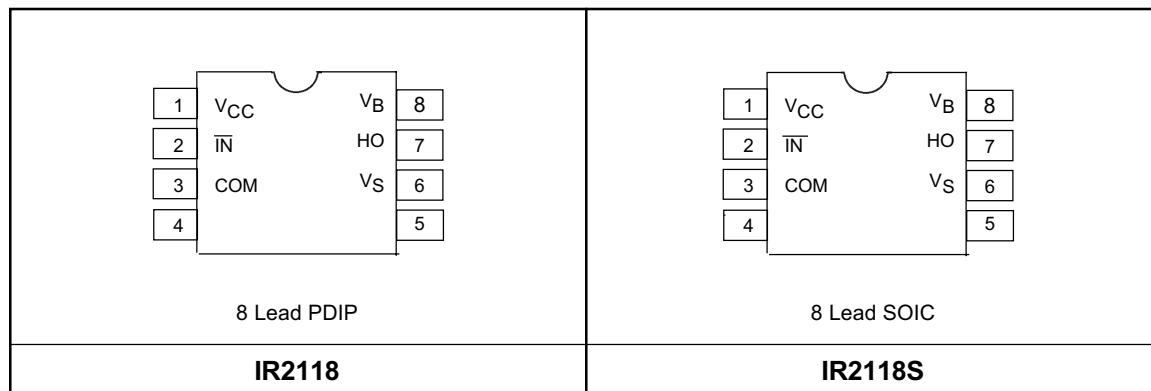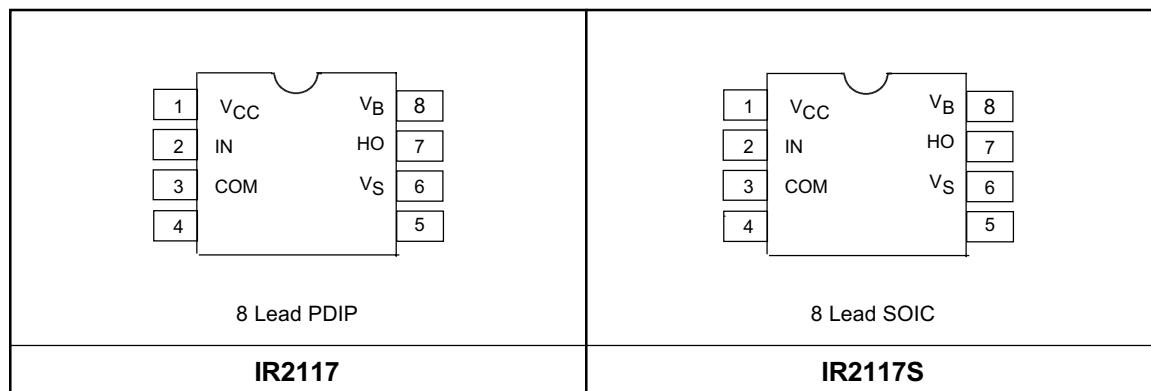

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

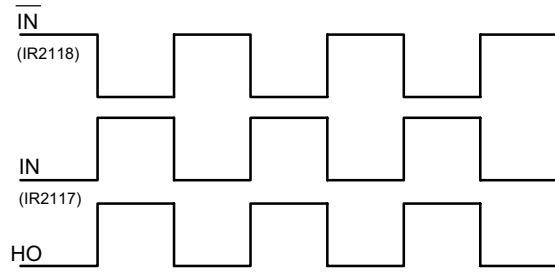


Figure 1. Input/Output Timing Diagram

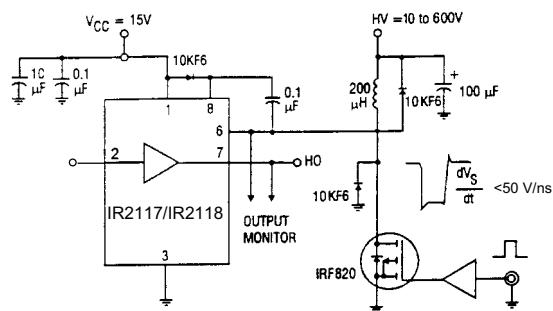


Figure 2. Floating Supply Voltage Transient Test Circuit

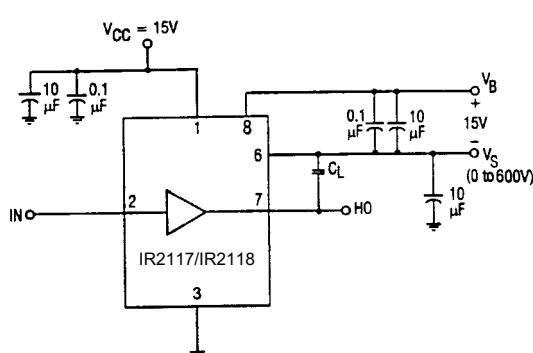


Figure 3. Switching Time Test Circuit



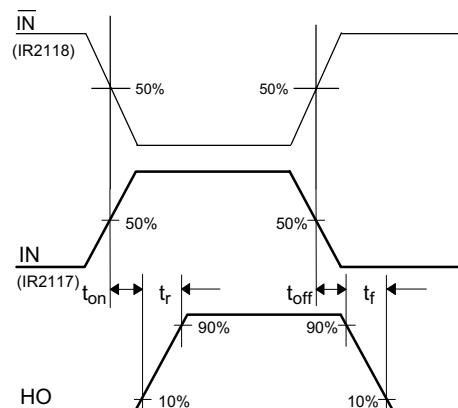


Figure 4. Switching Time Waveform Definition


IR2117(S)/IR2118(S) & (PbF)

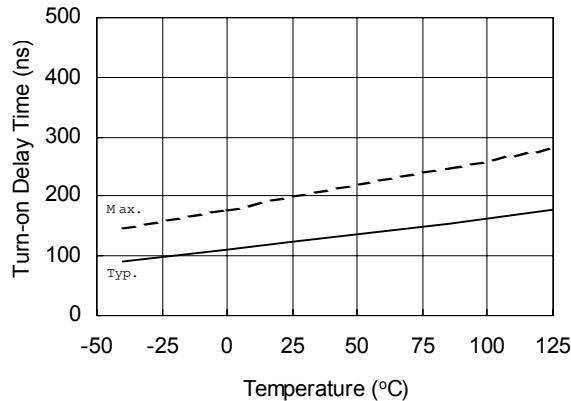


**Figure 4A. Turn-On Time
vs. Temperature**

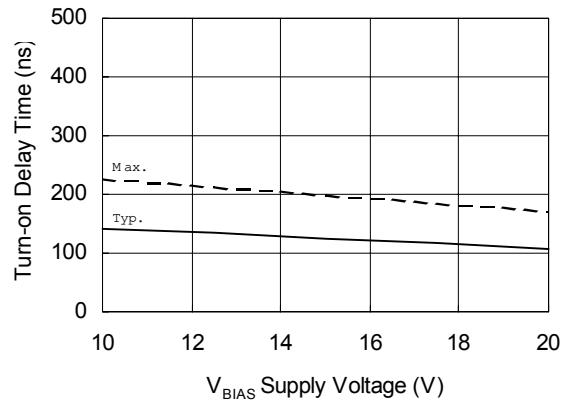

**Figure 4B. Turn-On Time
vs. Supply Voltage**

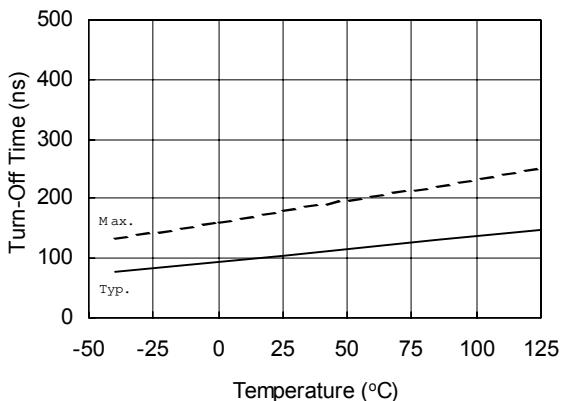

**Figure 5A. Turn-Off Time
vs. Temperature**

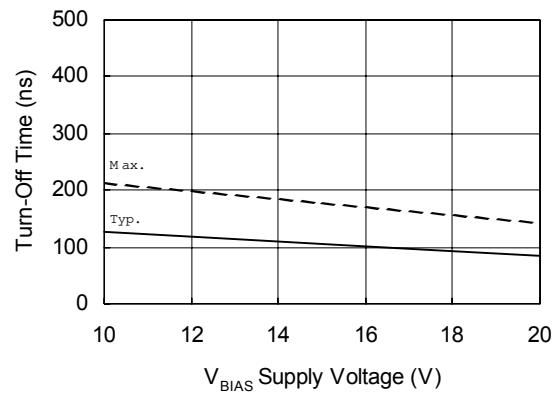

**Figure 5B. Turn-Off Time
vs. Supply Voltage**

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

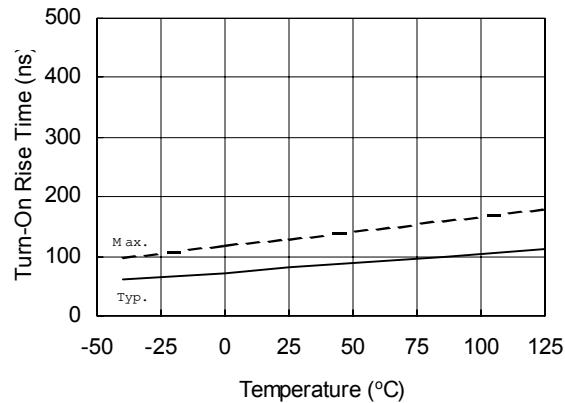


Figure 6A. Turn-On Rise Time
vs. Temperature

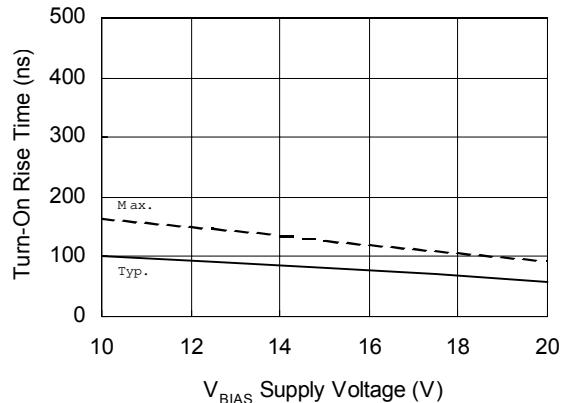


Figure 6B. Turn-On Rise Time
vs. Supply Voltage

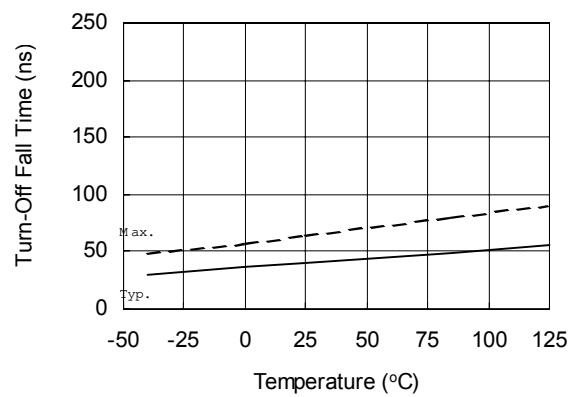


Figure 7A. Turn-Off Fall Time
vs. Temperature

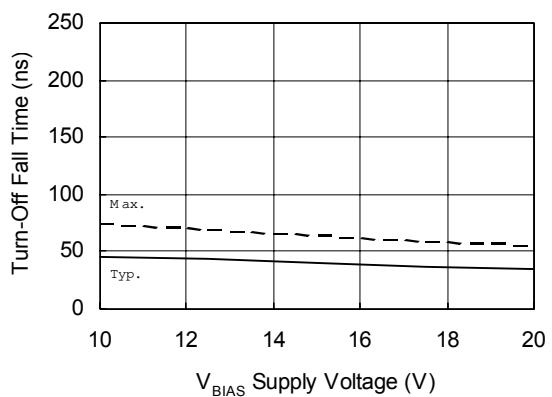


Figure 7B. Turn-Off Fall Time
vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

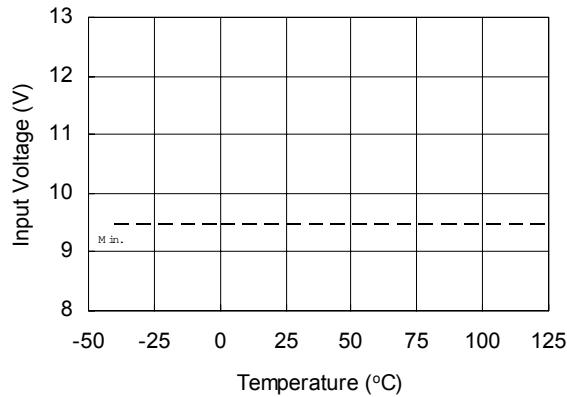


Figure 8A. Logic "1" (IR2118 "0") Input Voltage vs. Temperature

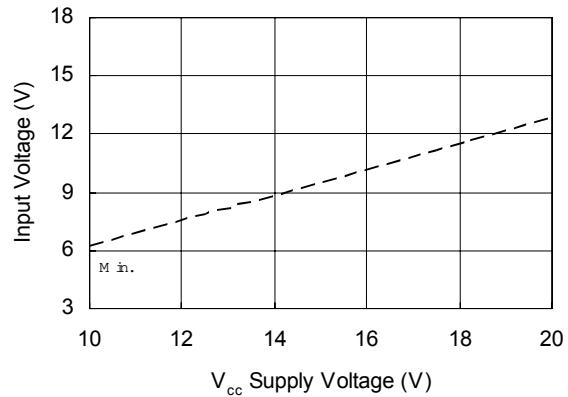


Figure 8B. Logic "1" (IR2118 "0") Input Voltage vs. Supply Voltage

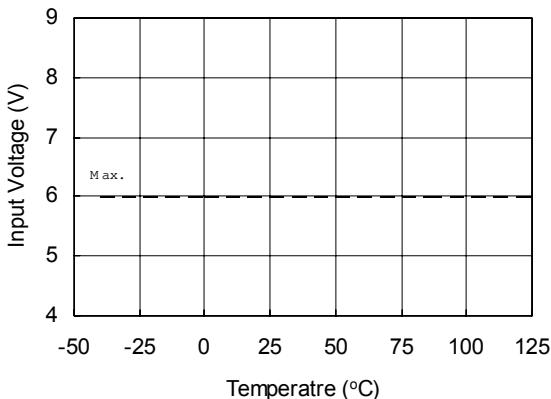


Figure 9A. Logic "0" (IR2118 "1") Input Voltage vs. Temperature

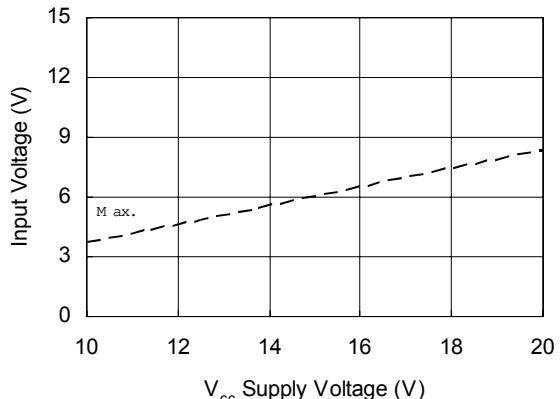


Figure 9B. Logic "0" (IR2118 "1") Input Voltage vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

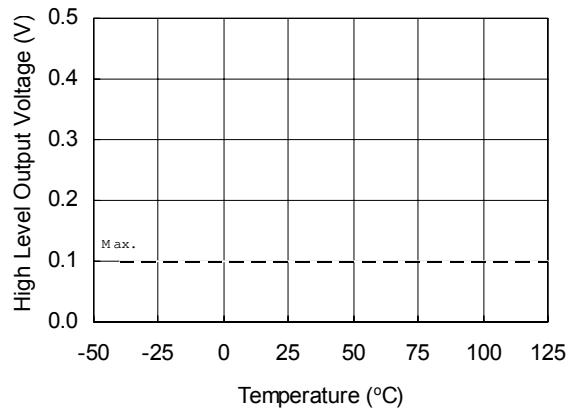


Figure 10A. High Level Output vs. Temperature

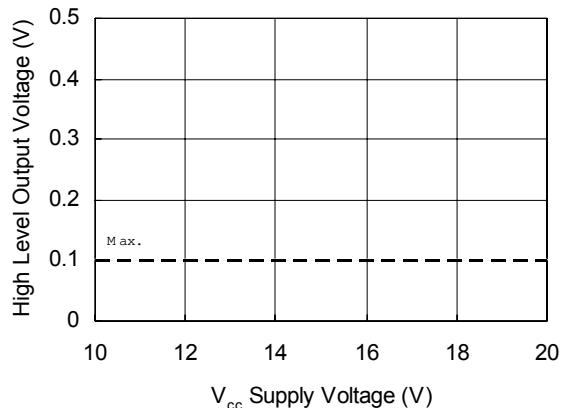


Figure 10B. High Level Output vs. Supply Voltage

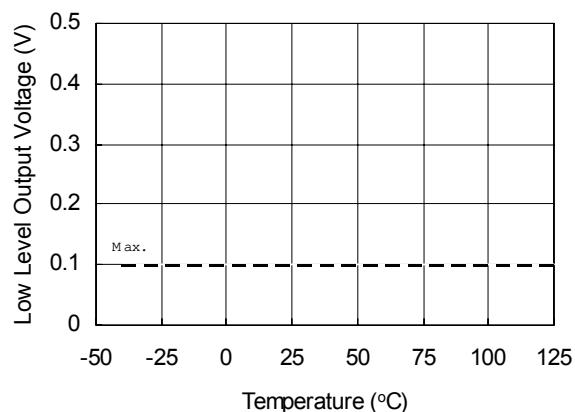


Figure 11A. Low Level Output vs. Temperature

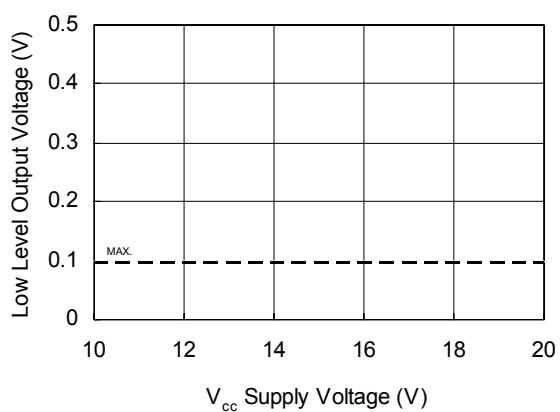


Figure 11B. Low Level Output vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

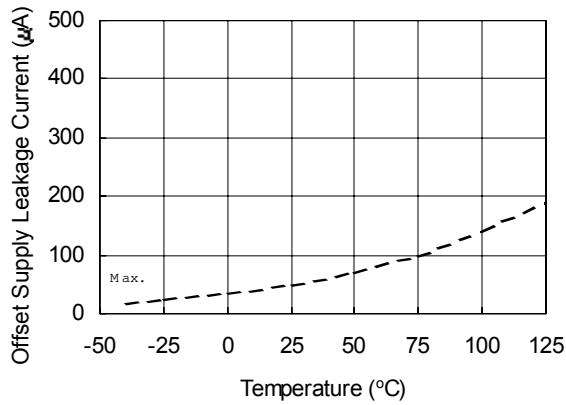


Figure 12A. Offset Supply Leakage Current vs. Temperature

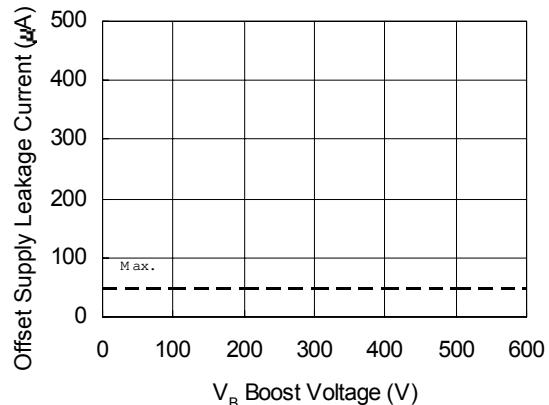


Figure 12B. Offset Supply Leakage Current vs. V_B Boost Voltage

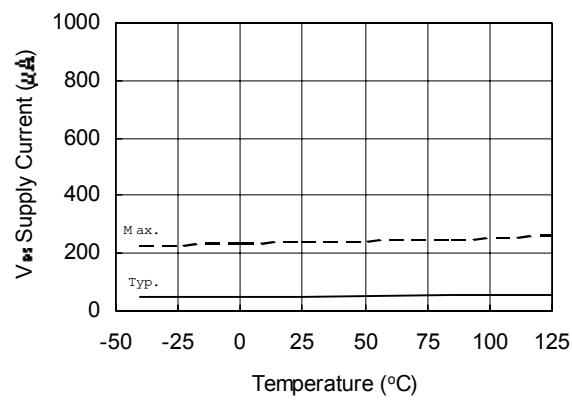


Figure 13A. V_{BS} Supply Current vs. Temperature

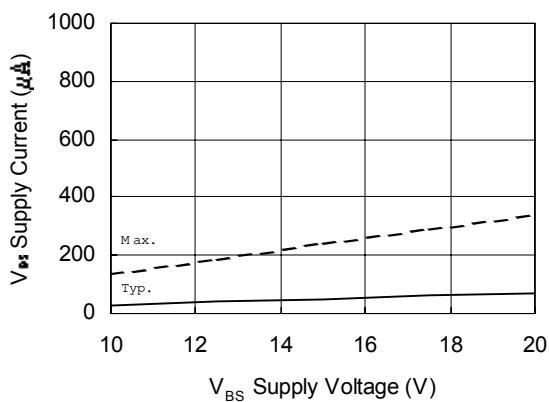


Figure 13B. V_{BS} Supply Current vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

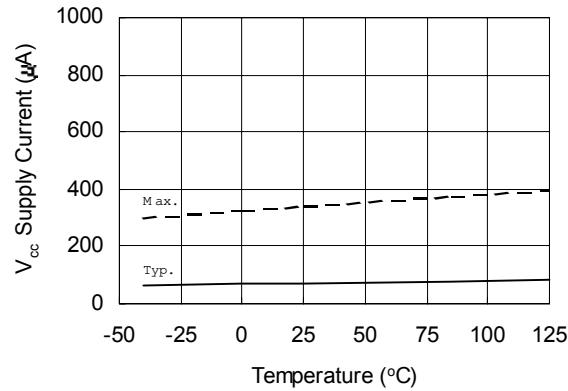


Figure 14A. V_{cc} Supply Current vs. Temperature

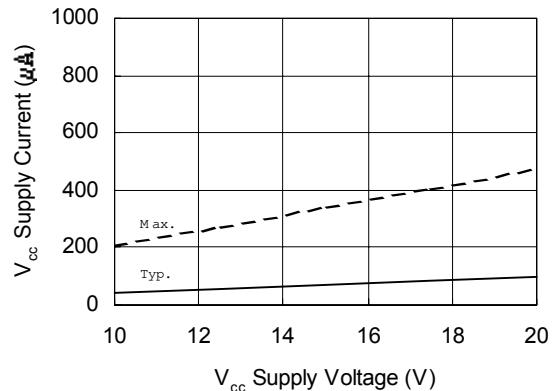


Figure 14B. V_{cc} Supply Current vs. Supply Voltage

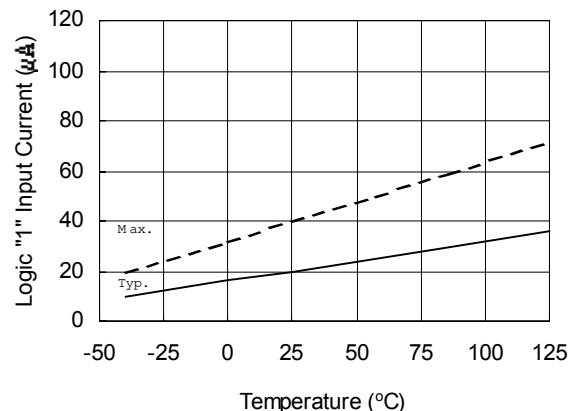


Figure 15A. Logic "1" (2118 "0") Input Current vs. Temperature

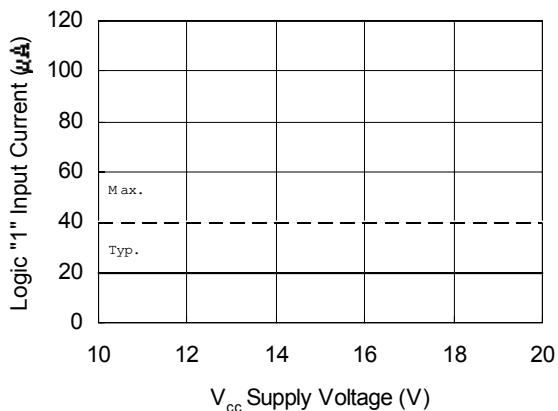


Figure 15B. Logic "1" (2118 "0") Input Current vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

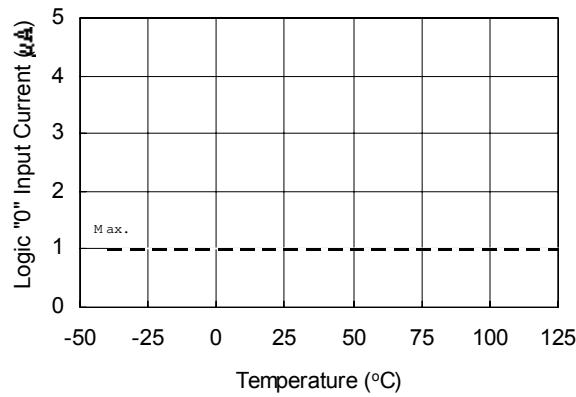


Figure 16A. Logic "0" (2118"1") Input Current vs. Temperature

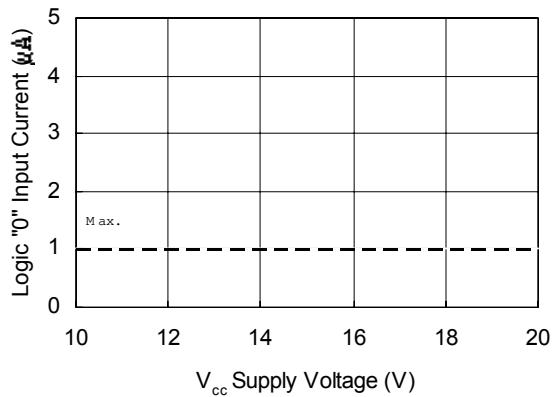


Figure 16B. Logic "0" (2118"1") Input Current vs. Supply Voltage

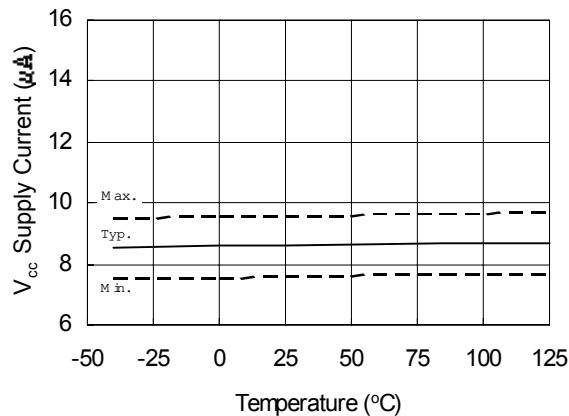


Figure 17A. V_{cc} Undervoltage Threshold (+) vs. Temperature

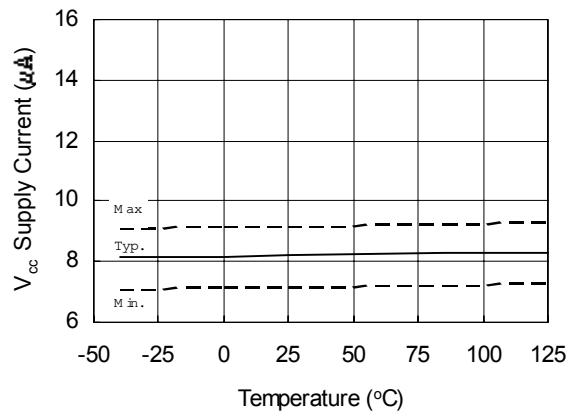


Figure 18A. V_{cc} Undervoltage Threshold (-) vs. Temperature

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

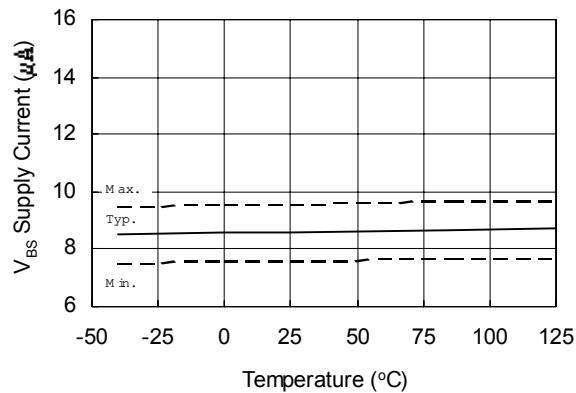


Figure 19A. V_{BS} Undervoltage Threshold (+) vs. Temperature

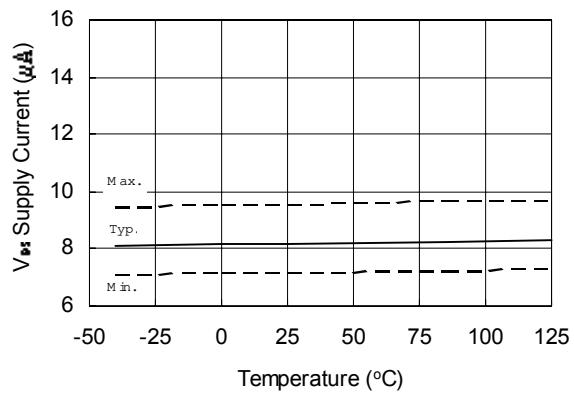


Figure 20A. V_{BS} Undervoltage Threshold (-) vs. Temperature

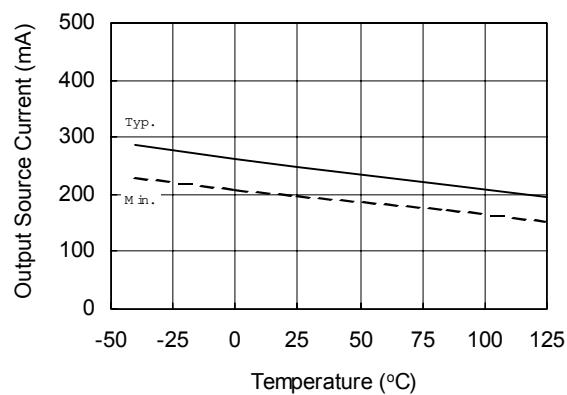


Figure 21A. Output Source Current vs. Temperature

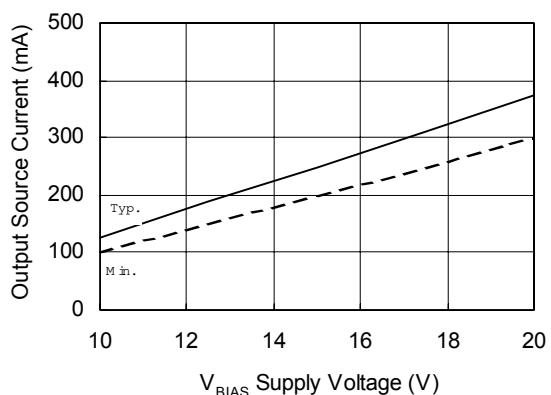


Figure 21B. Output Source Current vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

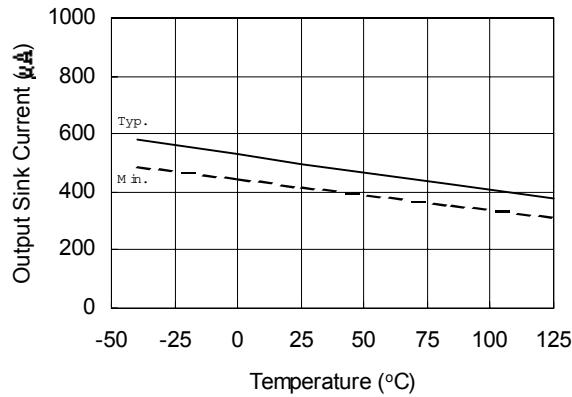


Figure 22A. Output Sink Current
vs.Temperature

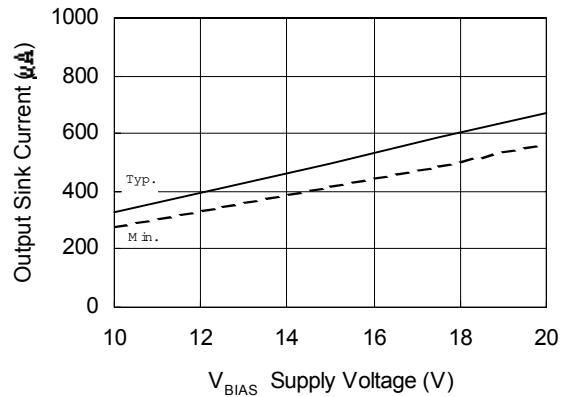


Figure 22B. Output Sink Current
vs. Supply Voltage

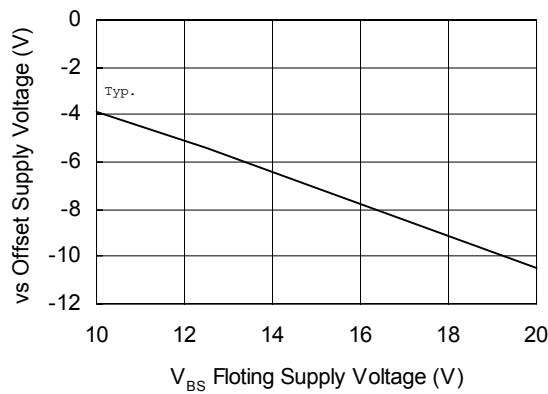


Figure 23B. Maximum VS Negative Offset
vs. Supply Voltage

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

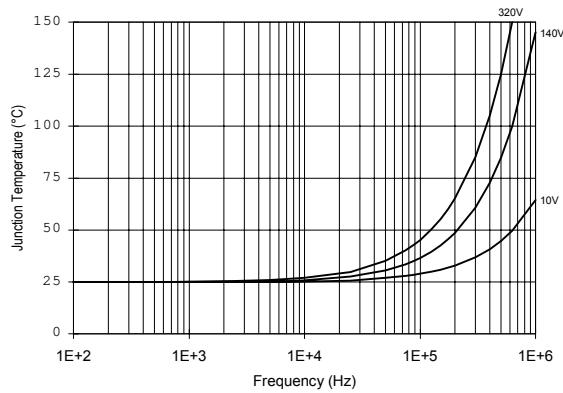


Figure 24. IR2117/IR2118 T_J vs. Frequency (IRFBC20)
 $R_{GATE} = 33\Omega$, $V_{CC} = 15V$

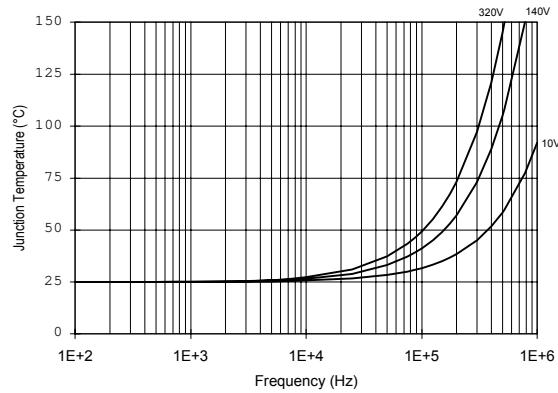


Figure 25. IR2117/IR2118 T_J vs. Frequency (IRFBC30)
 $R_{GATE} = 22\Omega$, $V_{CC} = 15V$

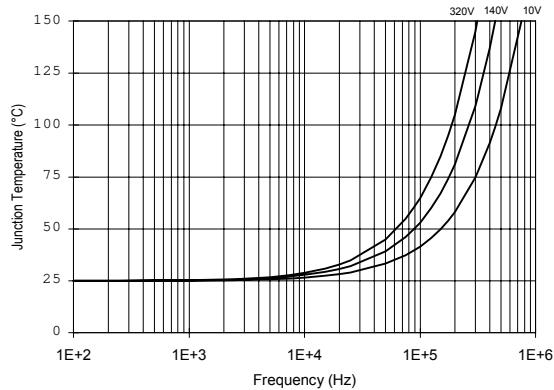


Figure 26. IR2117/IR2118 T_J vs. Frequency (IRFBC40)
 $R_{GATE} = 15\Omega$, $V_{CC} = 15V$


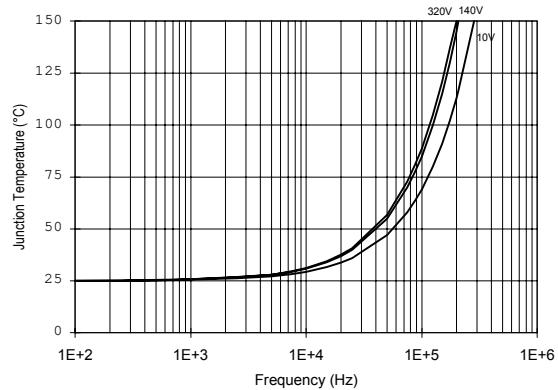


Figure 27. IR2117/IR2118 T_J vs. Frequency (IRFPE50)
 $R_{GATE} = 10\Omega$, $V_{CC} = 15V$

IR2117(S)/IR2118(S) & (PbF)


Case outlines

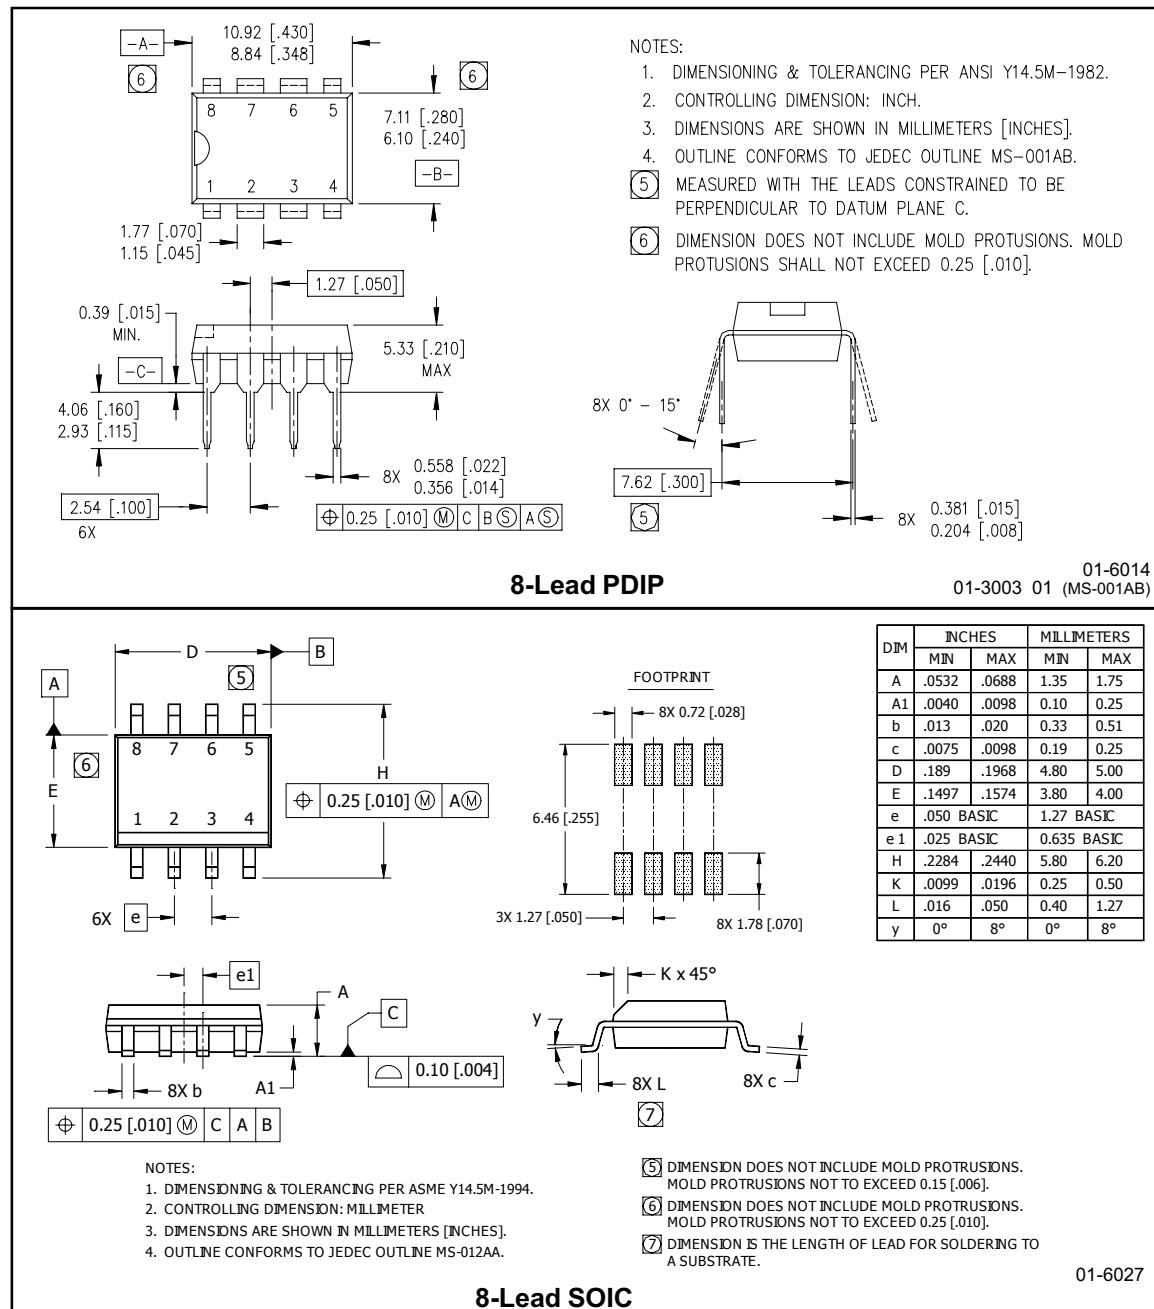

IR2117(S)/IR2118(S) & (PbF)

International
IR Rectifier

LEADFREE PART MARKING INFORMATION

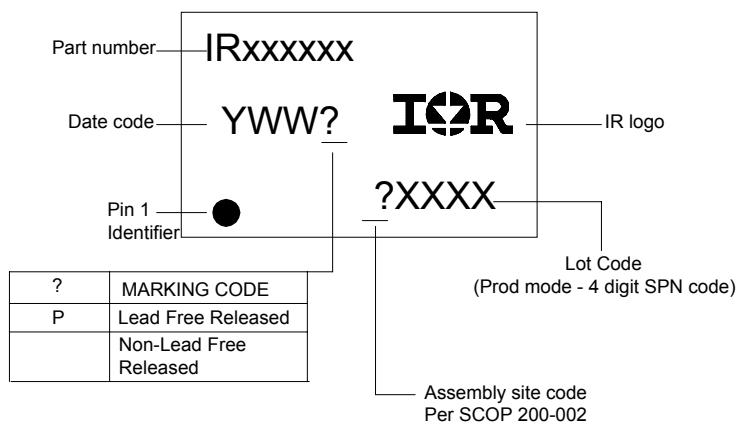

ORDER INFORMATION

Basic Part (Non-Lead Free)

- 8-Lead PDIP IR2117 order IR2117
- 8-Lead PDIP IR2118 order IR2118
- 8-Lead SOIC IR2117S order IR2117S
- 8-Lead SOIC IR2118S order IR2118S

Leadfree Part

- 8-Lead PDIP IR2117 order IR2117PbF
- 8-Lead PDIP IR2118 order IR2118PbF
- 8-Lead SOIC IR2117S order IR2117SPbF
- 8-Lead SOIC IR2118S order IR2118SPbF

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
This product has been qualified per industrial level
Data and specifications subject to change without notice. 5/14/2007