



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## RF Power LDMOS Transistor

### N-Channel Enhancement-Mode Lateral MOSFET

This 93 W asymmetrical Doherty RF power LDMOS transistor is designed for cellular base station applications covering the frequency range of 1452 to 1511 MHz.

#### 1500 MHz

- Typical Doherty Single-Carrier W-CDMA Performance:  $V_{DD} = 31$  Vdc,  $I_{DQA} = 1000$  mA,  $V_{GSB} = 0.5$  Vdc,  $P_{out} = 93$  W Avg., Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF.


Frequency	$G_{ps}$ (dB)	$\eta_D$ (%)	Output PAR (dB)	ACPR (dBc)
1452 MHz	18.8	48.2	8.1	-38.2
1480 MHz	19.0	48.0	7.9	-39.2
1511 MHz	19.0	48.7	7.7	-38.6

#### Features


- Advanced high performance in-package Doherty
- Greater negative gate-source voltage range for improved Class C operation
- Designed for digital predistortion error correction systems

**A2T14H450-23NR6**

1452–1511 MHz, 93 W AVG., 31 V  
AIRFAST RF POWER LDMOS  
TRANSISTOR



OM-1230-4L2S  
PLASTIC

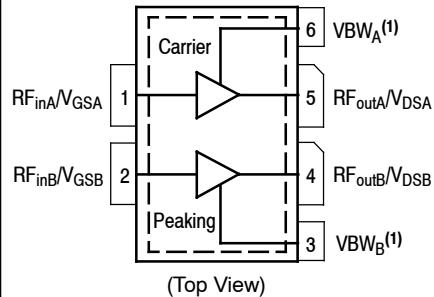

Note: Exposed backside of the package is the source terminal for the transistor.

**Figure 1. Pin Connections**

- Device cannot operate with  $V_{DD}$  current supplied through pin 3 and pin 6.

**Table 1. Maximum Ratings**

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	-0.5, +65	Vdc
Gate-Source Voltage	$V_{GS}$	-6.0, +10	Vdc
Operating Voltage	$V_{DD}$	32, +0	Vdc
Storage Temperature Range	$T_{stg}$	-65 to +150	°C
Case Operating Temperature Range	$T_C$	-40 to +150	°C
Operating Junction Temperature Range (1,2)	$T_J$	-40 to +225	°C

**Table 2. Thermal Characteristics**

Characteristic	Symbol	Value (2,3)	Unit
Thermal Resistance, Junction to Case Case Temperature 74°C, 93 W Avg., W-CDMA, 31 Vdc, $I_{DQA} = 1000$ mA, $V_{GSB} = 0.5$ Vdc, 1482 MHz	$R_{\theta JC}$	0.27	°C/W

**Table 3. ESD Protection Characteristics**

Test Methodology	Class
Human Body Model (per JESD22-A114)	2
Charge Device Model (per JESD22-C101)	IV

**Table 4. Moisture Sensitivity Level**

Test Methodology	Rating	Package Peak Temperature	Unit
Per JESD22-A113, IPC/JEDEC J-STD-020	3	260	°C

**Table 5. Electrical Characteristics** ( $T_A = 25^\circ C$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>Off Characteristics (4)</b>					
Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 65$ Vdc, $V_{GS} = 0$ Vdc)	$I_{DSS}$	—	—	10	µAdc
Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 32$ Vdc, $V_{GS} = 0$ Vdc)	$I_{DSS}$	—	—	1	µAdc
Gate-Source Leakage Current ( $V_{GS} = 5$ Vdc, $V_{DS} = 0$ Vdc)	$I_{GSS}$	—	—	1	µAdc

**On Characteristics - Side A, Carrier**

Gate Threshold Voltage ( $V_{DS} = 10$ Vdc, $I_D = 200$ µAdc)	$V_{GS(th)}$	1.05	1.2	2.2	Vdc
Gate Quiescent Voltage ( $V_{DD} = 31$ Vdc, $I_D = 1000$ mAdc, Measured in Functional Test)	$V_{GSA(Q)}$	2.1	2.5	2.9	Vdc
Drain-Source On-Voltage ( $V_{GS} = 10$ Vdc, $I_D = 2.0$ Adc)	$V_{DS(on)}$	0.05	0.15	0.3	Vdc

**On Characteristics - Side B, Peaking**

Gate Threshold Voltage ( $V_{DS} = 10$ Vdc, $I_D = 300$ µAdc)	$V_{GS(th)}$	0.8	1.2	1.6	Vdc
Drain-Source On-Voltage ( $V_{GS} = 10$ Vdc, $I_D = 3.0$ Adc)	$V_{DS(on)}$	0.05	0.15	0.3	Vdc

1. Continuous use at maximum temperature will affect MTTF.
2. MTTF calculator available at <http://www.nxp.com/RF/calculators>.
3. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.nxp.com/RF> and search for AN1955.
4. Each side of device measured separately.

(continued)

**Table 5. Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted) (continued)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>Functional Tests – 1452 MHz</b> (1,2) (In NXP Doherty Test Fixture, 50 ohm system) $V_{DD} = 31 \text{ Vdc}$ , $I_{DQA} = 1000 \text{ mA}$ , $V_{GSB} = 0.5 \text{ Vdc}$ , $P_{out} = 93 \text{ W Avg.}$ , $f = 1452 \text{ MHz}$ , Single-Carrier W-CDMA, IQ Magnitude Clipping, Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5 \text{ MHz}$ Offset.					
Power Gain	$G_{ps}$	17.0	18.8	20.0	dB
Drain Efficiency	$\eta_D$	45.0	48.2	—	%
Output Peak-to-Average Ratio @ 0.01% Probability on CCDF	PAR	7.3	8.1	—	dB
Adjacent Channel Power Ratio	ACPR	—	-38.2	-32.0	dBc
<b>Functional Tests – 1511 MHz</b> (1,2) (In NXP Doherty Test Fixture, 50 ohm system) $V_{DD} = 31 \text{ Vdc}$ , $I_{DQA} = 1000 \text{ mA}$ , $V_{GSB} = 0.5 \text{ Vdc}$ , $P_{out} = 93 \text{ W Avg.}$ , $f = 1511 \text{ MHz}$ , Single-Carrier W-CDMA, IQ Magnitude Clipping, Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5 \text{ MHz}$ Offset.					
Power Gain	$G_{ps}$	17.0	19.0	20.0	dB
Drain Efficiency	$\eta_D$	45.0	48.7	—	%
Output Peak-to-Average Ratio @ 0.01% Probability on CCDF	PAR	7.3	7.7	—	dB
Adjacent Channel Power Ratio	ACPR	—	-38.6	-32.0	dBc
<b>Load Mismatch</b> (2) (In NXP Doherty Test Fixture, 50 ohm system) $I_{DQA} = 1000 \text{ mA}$ , $V_{GSB} = 0.5 \text{ Vdc}$ , $f = 1480 \text{ MHz}$ , 12 $\mu\text{sec(on)}$ , 10% Duty Cycle					
VSWR 10:1 at 32 Vdc, 560 W Pulsed CW Output Power (3 dB Input Overdrive from 417 W Pulsed CW Rated Power)	No Device Degradation				

**Typical Performance** (2) (In NXP Doherty Test Fixture, 50 ohm system)  $V_{DD} = 31 \text{ Vdc}$ ,  $I_{DQA} = 1000 \text{ mA}$ ,  $V_{GSB} = 0.5 \text{ Vdc}$ , 1452–1511 MHz Bandwidth


$P_{out}$ @ 3 dB Compression Point (3)	P3dB	—	560	—	W
AM/PM (Maximum value measured at the P3dB compression point across the 1452–1511 MHz frequency range)	$\Phi$	—	-10	—	°
VBW Resonance Point (IMD Third Order Intermodulation Inflection Point)	VBW <sub>res</sub>	—	68	—	MHz
Gain Flatness in 59 MHz Bandwidth @ $P_{out} = 93 \text{ W Avg.}$	$G_F$	—	0.3	—	dB
Gain Variation over Temperature (-30°C to +85°C)	$\Delta G$	—	0.023	—	dB/°C
Output Power Variation over Temperature (-30°C to +85°C)	$\Delta P_{1dB}$	—	0.021	—	dB/°C

**Table 6. Ordering Information**

Device	Tape and Reel Information	Package
A2T14H450-23NR6	R6 Suffix = 150 Units, 56 mm Tape Width, 13-inch Reel	OM-1230-4L2S

1. Part internally matched both on input and output.
2. Measurements made with device in an asymmetrical Doherty configuration.
3.  $P_{3dB} = P_{avg} + 7.0 \text{ dB}$  where  $P_{avg}$  is the average output power measured using an unclipped W-CDMA single-carrier input signal where output PAR is compressed to 7.0 dB @ 0.01% probability on CCDF.

**A2T14H450-23NR6**

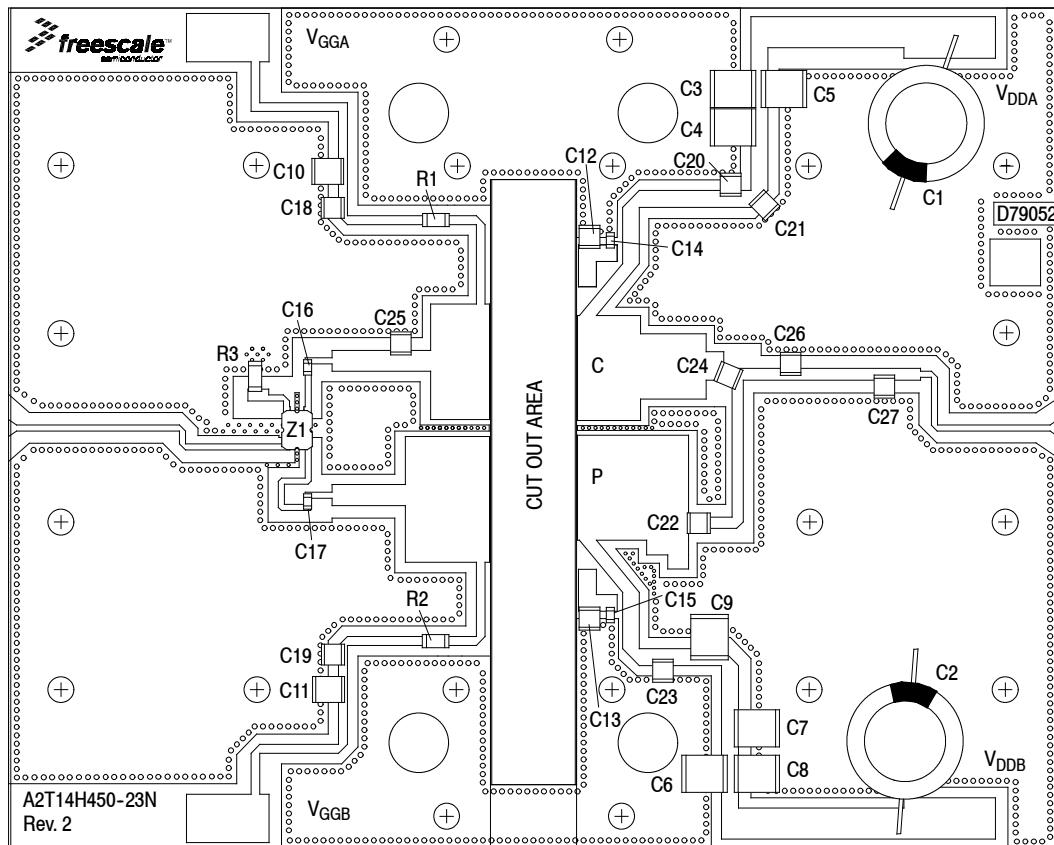


**Figure 2. A2T14H450-23NR6 Test Circuit Component Layout**


**Table 7. A2T14H450-23NR6 Test Circuit Component Designations and Values**

Part	Description	Part Number	Manufacturer
C1, C2	470 $\mu$ F, 63 V Electrolytic Capacitor	MCGPR63V477M13X26RH	Multicomp
C3, C4, C5, C6, C7, C8, C9	10 $\mu$ F Chip Capacitor	C5750X7S2A106M230KE	TDK
C10, C11	220 nF Chip Capacitor	C1812C224K5RACTU	Kemet
C12, C13	10 $\mu$ F Chip Capacitor	GRM32ER61H106KA12L	Murata
C14, C15, C16, C17	18 pF Chip Capacitor	GQM2195C2E180JB12D	Murata
C18, C19, C20, C21, C22, C23	18 pF Chip Capacitor	ATC100B180GT500XT	ATC
C24	8.2 pF Chip Capacitor	ATC100B8R2BT500XT	ATC
C25	1.8 pF Chip Capacitor	ATC100B1R8BT500XT	ATC
C26	0.2 pF Chip Capacitor	ATC100B0R2BT500XT	ATC
C27	0.4 pF Chip Capacitor	ATC100B0R4BT500XT	ATC
R1, R2	3.3 $\Omega$ , 1/4 W Chip Resistor	WCR1206-3R3FI	Welwyn
R3	50 $\Omega$ , 8 W Surface Mount Terminator	C8A50Z4A	Anaren
Z1	1800–2200 MHz Band, 90°, 2 dB Doherty Coupler	X3C20F1-02S	Anaren
PCB	Rogers RO4360G2, 0.020", $\epsilon_r$ = 6.15	D79052	MTL


## TYPICAL CHARACTERISTICS — 1452–1511 MHz

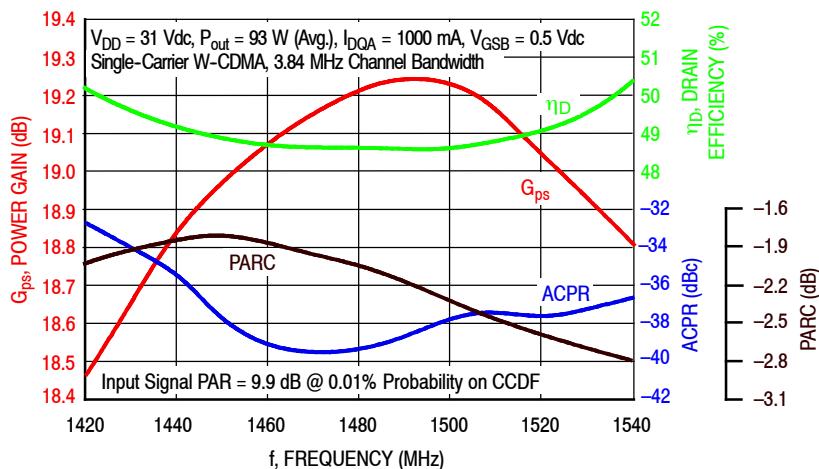

**Figure 3. Single-Carrier Output Peak-to-Average Ratio Compression (PARC) Broadband Performance @  $P_{out} = 93$  Watts Avg.**

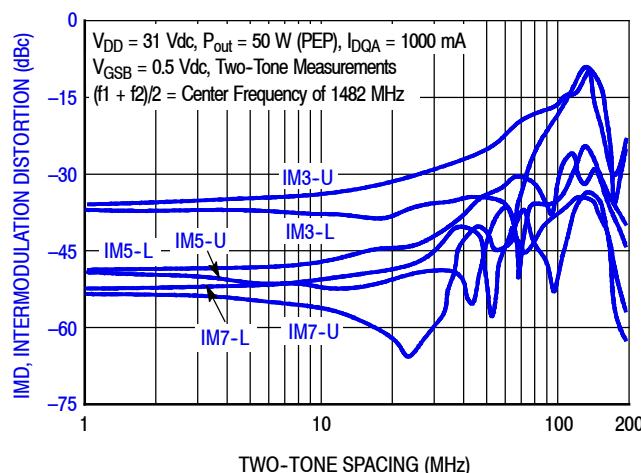


**Figure 4. Intermodulation Distortion Products versus Two-Tone Spacing**

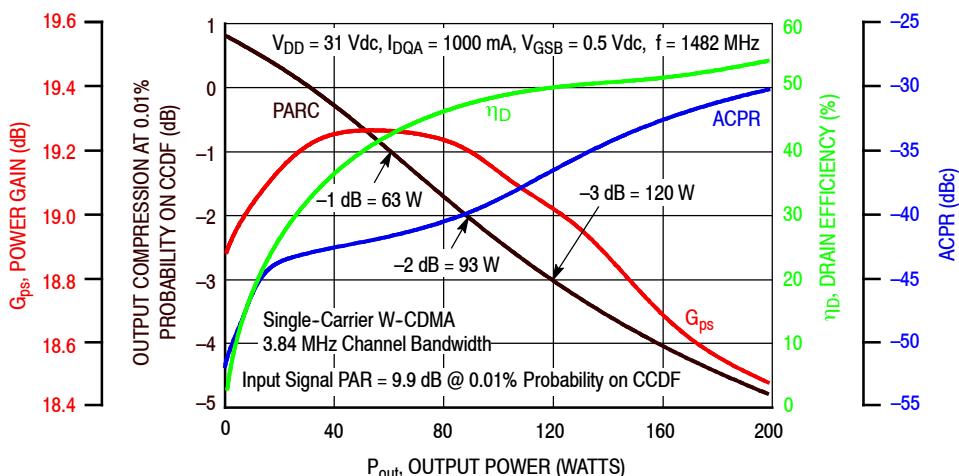


**Figure 5. Output Peak-to-Average Ratio Compression (PARC) versus Output Power**

## TYPICAL CHARACTERISTICS — 1452–1511 MHz

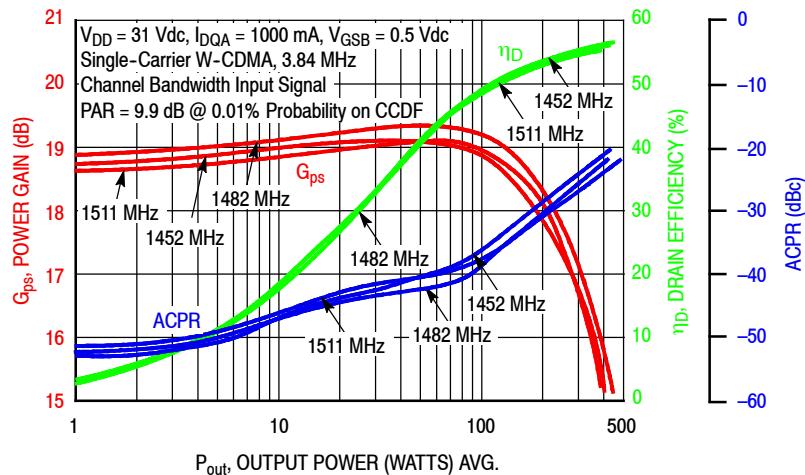

**Figure 6. Single-Carrier W-CDMA Power Gain, Drain Efficiency and ACPR versus Output Power**

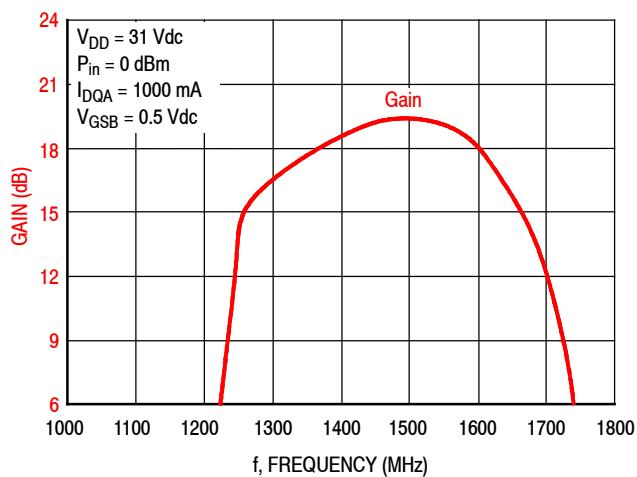

**Figure 7. Broadband Frequency Response**

**Table 8. Carrier Side Load Pull Performance — Maximum Power Tuning**V<sub>DD</sub> = 30 Vdc, I<sub>DQA</sub> = 880 mA, Pulsed CW, 10 μsec(on), 10% Duty Cycle

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Output Power					
			P1dB					
			Z <sub>load</sub> <sup>(1)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.91 – j4.66	2.03 + j4.44	0.83 – j2.39	19.3	53.5	224	55.2	-14
1475	2.84 – j4.94	2.51 + j4.37	0.80 – j2.41	19.2	53.5	224	54.1	-14
1510	4.51 – j4.97	3.95 + j4.30	0.83 – j2.58	19.4	53.3	214	54.4	-15

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Output Power					
			P3dB					
			Z <sub>load</sub> <sup>(2)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.91 – j4.66	1.97 + j4.74	0.86 – j2.49	17.2	54.2	263	57.2	-19
1475	2.84 – j4.94	2.54 + j4.71	0.81 – j2.50	17.1	54.2	263	55.8	-20
1510	4.51 – j4.97	4.27 + j4.74	0.83 – j2.68	17.2	54.0	251	55.2	-20

(1) Load impedance for optimum P1dB power.

(2) Load impedance for optimum P3dB power.


Z<sub>source</sub> = Measured impedance presented to the input of the device at the package reference plane.Z<sub>in</sub> = Impedance as measured from gate contact to ground.Z<sub>load</sub> = Measured impedance presented to the output of the device at the package reference plane.**Table 9. Carrier Side Load Pull Performance — Maximum Efficiency Tuning**V<sub>DD</sub> = 30 Vdc, I<sub>DQA</sub> = 880 mA, Pulsed CW, 10 μsec(on), 10% Duty Cycle

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Drain Efficiency					
			P1dB					
			Z <sub>load</sub> <sup>(1)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.91 – j4.66	2.10 + j4.60	1.91 – j1.26	22.8	50.9	123	67.9	-23
1475	2.84 – j4.94	2.62 + j4.65	1.69 – j1.37	22.7	51.3	135	67.7	-23
1510	4.51 – j4.97	4.30 + j4.44	1.55 – j1.35	23.2	50.7	117	67.1	-25

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Drain Efficiency					
			P3dB					
			Z <sub>load</sub> <sup>(2)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.91 – j4.66	2.04 + j4.78	1.77 – j1.51	20.4	52.0	158	68.8	-29
1475	2.84 – j4.94	2.55 + j4.93	1.53 – j1.50	20.5	52.2	166	68.5	-30
1510	4.51 – j4.97	4.37 + j4.87	1.44 – j1.66	20.6	52.1	162	67.8	-31

(1) Load impedance for optimum P1dB efficiency.

(2) Load impedance for optimum P3dB efficiency.

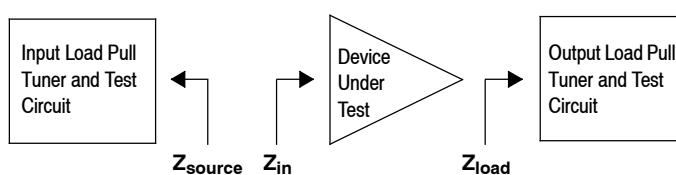Z<sub>source</sub> = Measured impedance presented to the input of the device at the package reference plane.Z<sub>in</sub> = Impedance as measured from gate contact to ground.Z<sub>load</sub> = Measured impedance presented to the output of the device at the package reference plane.

## P1dB – TYPICAL CARRIER SIDE LOAD PULL CONTOURS — 1475 MHz

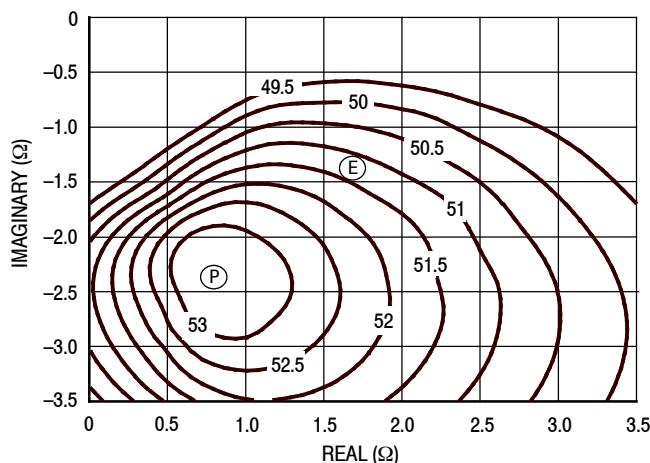


Figure 8. P1dB Load Pull Output Power Contours (dBm)

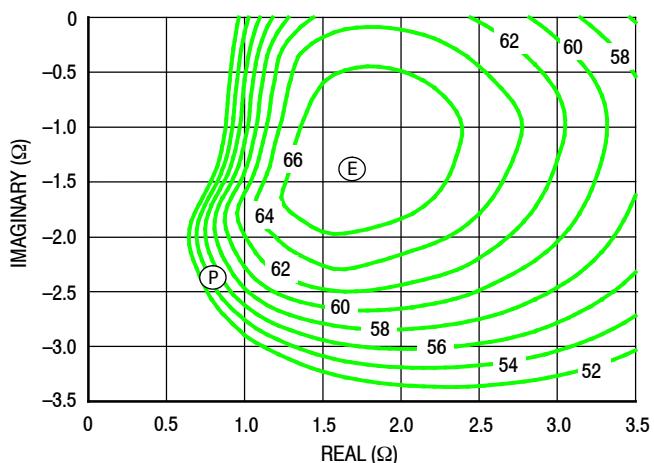


Figure 9. P1dB Load Pull Efficiency Contours (%)

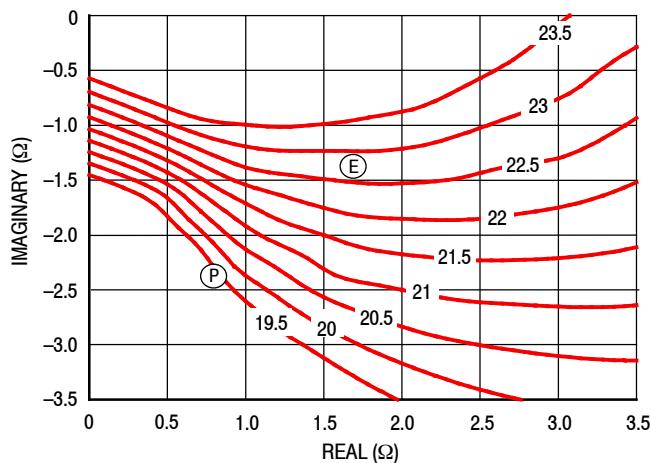


Figure 10. P1dB Load Pull Gain Contours (dB)

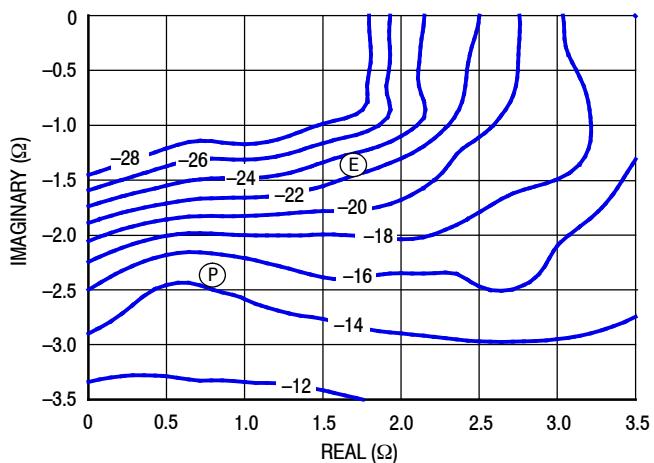


Figure 11. P1dB Load Pull AM/PM Contours (°)

**NOTE:** (P) = Maximum Output Power

(E) = Maximum Drain Efficiency

- Gain
- Drain Efficiency
- Linearity
- Output Power

### P3dB – TYPICAL CARRIER SIDE LOAD PULL CONTOURS — 1475 MHz

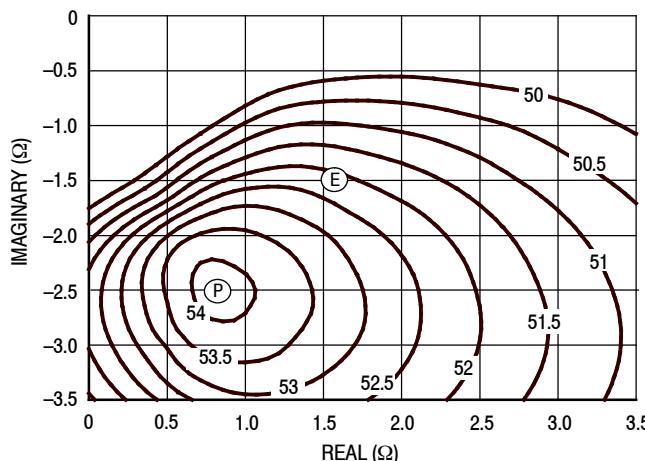


Figure 12. P3dB Load Pull Output Power Contours (dBm)

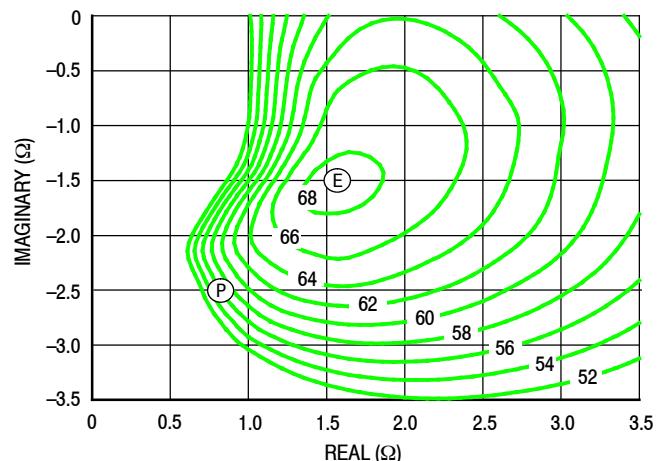


Figure 13. P3dB Load Pull Efficiency Contours (%)

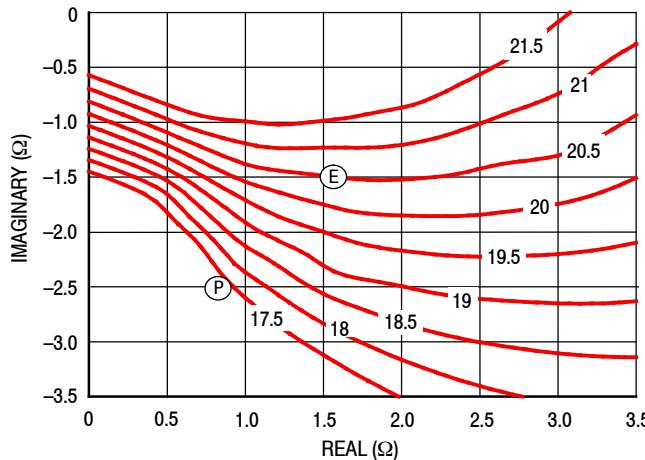


Figure 14. P3dB Load Pull Gain Contours (dB)

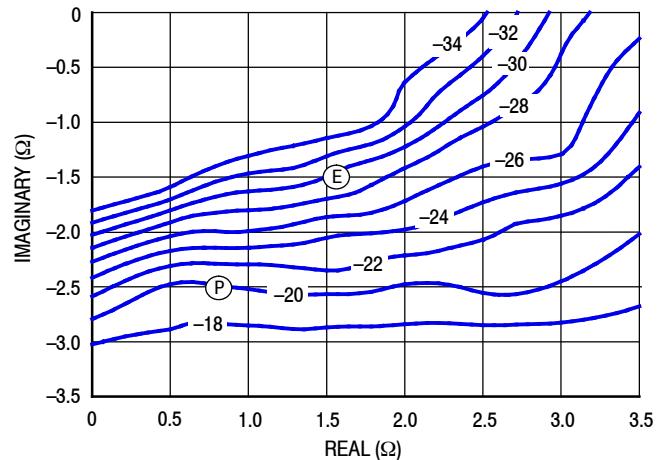


Figure 15. P3dB Load Pull AM/PM Contours (°)

**NOTE:** (P) = Maximum Output Power

(E) = Maximum Drain Efficiency

- Gain
- Drain Efficiency
- Linearity
- Output Power

**Table 10. Peaking Side Load Pull Performance — Maximum Power Tuning**V<sub>DD</sub> = 30 Vdc, V<sub>GSB</sub> = 0.5 Vdc, Pulsed CW, 10 μsec(on), 10% Duty Cycle

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Output Power					
			P1dB					
			Z <sub>load</sub> <sup>(1)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.11 – j3.84	1.04 + j3.72	0.83 – j2.35	15.3	55.4	347	53.7	-29
1475	1.21 – j3.76	1.28 + j3.67	0.87 – j2.32	15.7	55.4	347	55.2	-31
1510	2.32 – j4.12	2.18 + j4.03	0.88 – j2.51	16.0	55.7	372	55.8	-32

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Output Power					
			P3dB					
			Z <sub>load</sub> <sup>(2)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.11 – j3.84	1.02 + j3.90	0.90 – j2.45	13.3	56.3	427	58.5	-38
1475	1.21 – j3.76	1.27 + j3.85	0.87 – j2.41	13.5	56.2	417	57.4	-39
1510	2.32 – j4.12	2.43 + j4.32	0.92 – j2.61	13.9	56.3	427	58.2	-40

(1) Load impedance for optimum P1dB power.

(2) Load impedance for optimum P3dB power.


Z<sub>source</sub> = Measured impedance presented to the input of the device at the package reference plane.Z<sub>in</sub> = Impedance as measured from gate contact to ground.Z<sub>load</sub> = Measured impedance presented to the output of the device at the package reference plane.**Table 11. Peaking Side Load Pull Performance — Maximum Efficiency Tuning**V<sub>DD</sub> = 30 Vdc, V<sub>GSB</sub> = 0.5 Vdc, Pulsed CW, 10 μsec(on), 10% Duty Cycle

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Drain Efficiency					
			P1dB					
			Z <sub>load</sub> <sup>(1)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.11 – j3.84	0.93 + j3.72	1.87 – j1.55	16.9	54.0	251	68.0	-34
1475	1.21 – j3.76	1.12 + j3.70	1.84 – j1.21	17.2	53.5	224	67.7	-36
1510	2.32 – j4.12	1.89 + j4.12	1.61 – j1.68	17.3	54.2	263	67.7	-37

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Drain Efficiency					
			P3dB					
			Z <sub>load</sub> <sup>(2)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	AM/PM (°)
1452	1.11 – j3.84	0.99 + j3.91	1.85 – j1.93	14.6	54.9	309	66.6	-43
1475	1.21 – j3.76	1.24 + j3.90	1.79 – j1.75	15.0	54.8	302	66.6	-46
1510	2.32 – j4.12	2.24 + j4.45	1.78 – j1.84	15.1	54.9	309	66.6	-46

(1) Load impedance for optimum P1dB efficiency.

(2) Load impedance for optimum P3dB efficiency.

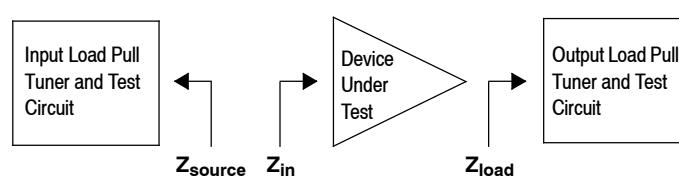Z<sub>source</sub> = Measured impedance presented to the input of the device at the package reference plane.Z<sub>in</sub> = Impedance as measured from gate contact to ground.Z<sub>load</sub> = Measured impedance presented to the output of the device at the package reference plane.

### P1dB – TYPICAL PEAKING SIDE LOAD PULL CONTOURS — 1475 MHz

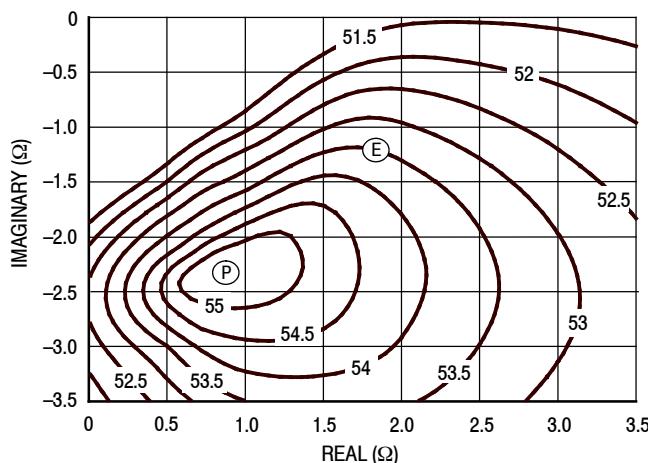


Figure 16. P1dB Load Pull Output Power Contours (dBm)

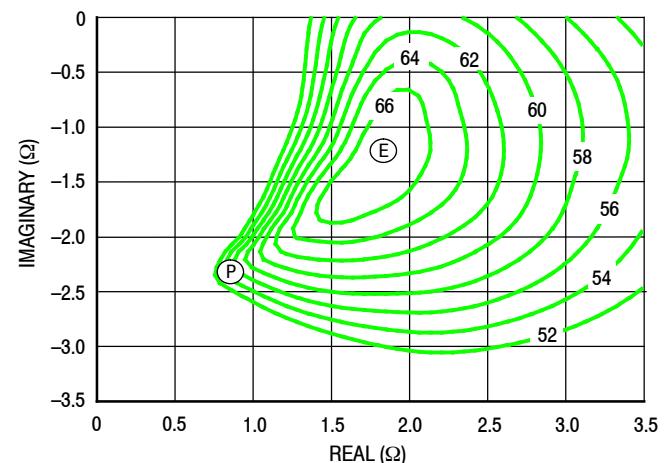


Figure 17. P1dB Load Pull Efficiency Contours (%)

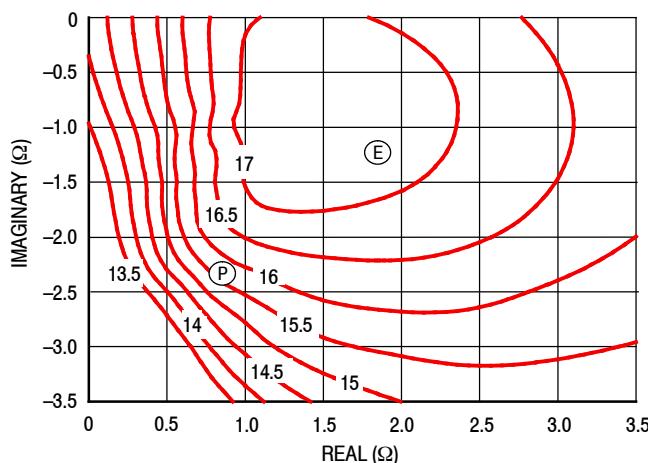


Figure 18. P1dB Load Pull Gain Contours (dB)

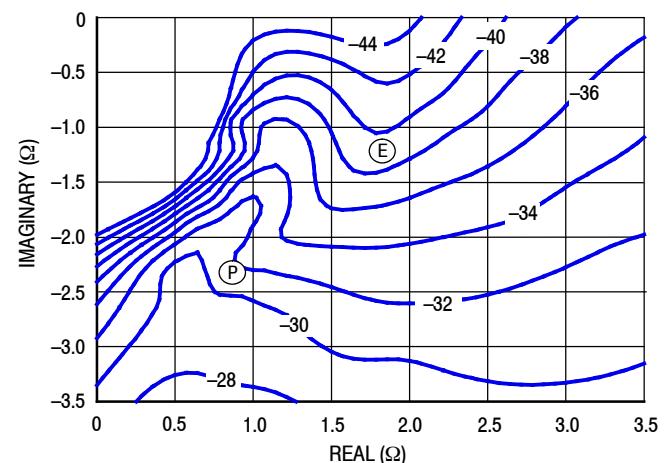


Figure 19. P1dB Load Pull AM/PM Contours (°)

**NOTE:** (P) = Maximum Output Power

(E) = Maximum Drain Efficiency

- Gain
- Drain Efficiency
- Linearity
- Output Power

### P3dB – TYPICAL PEAKING SIDE LOAD PULL CONTOURS — 1475 MHz

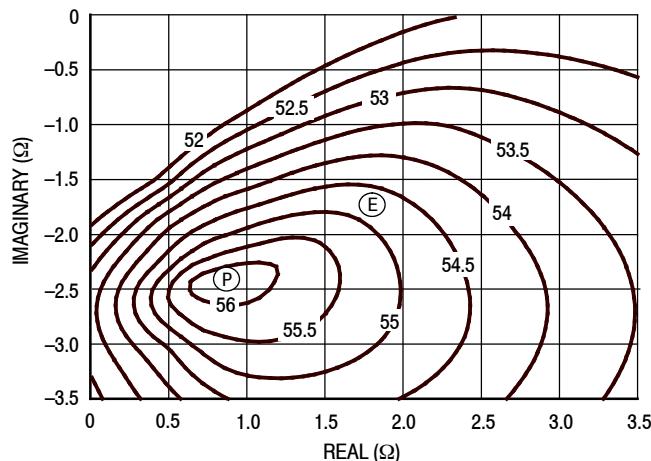


Figure 20. P3dB Load Pull Output Power Contours (dBm)

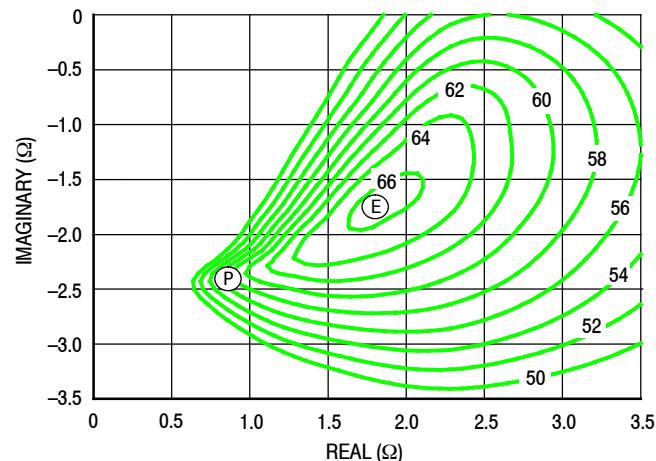


Figure 21. P3dB Load Pull Efficiency Contours (%)

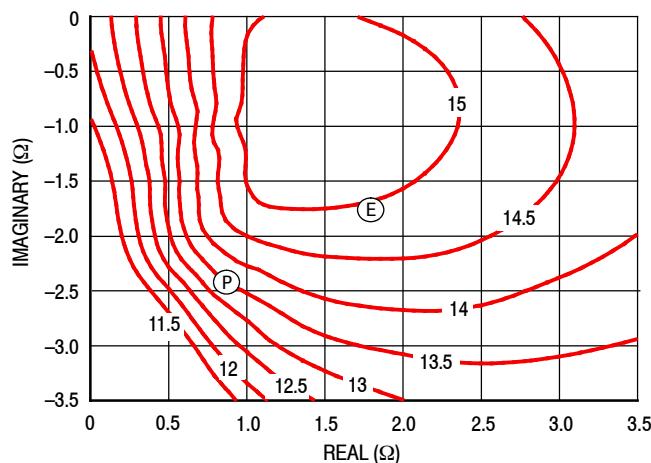


Figure 22. P3dB Load Pull Gain Contours (dB)

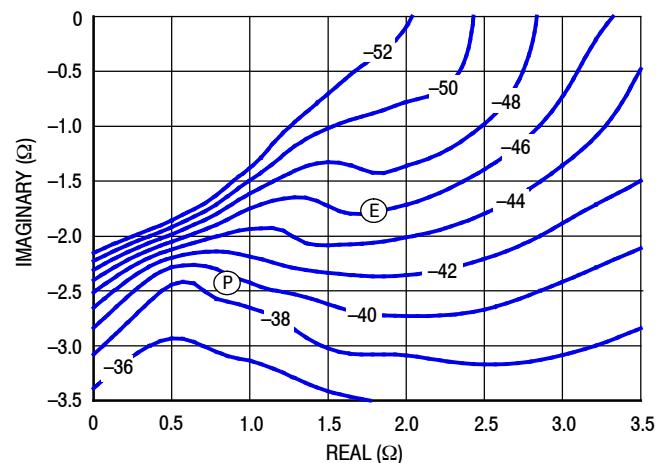



Figure 23. P3dB Load Pull AM/PM Contours (°)

**NOTE:** (P) = Maximum Output Power

(E) = Maximum Drain Efficiency

- Gain
- Drain Efficiency
- Linearity
- Output Power


## PACKAGE DIMENSIONS

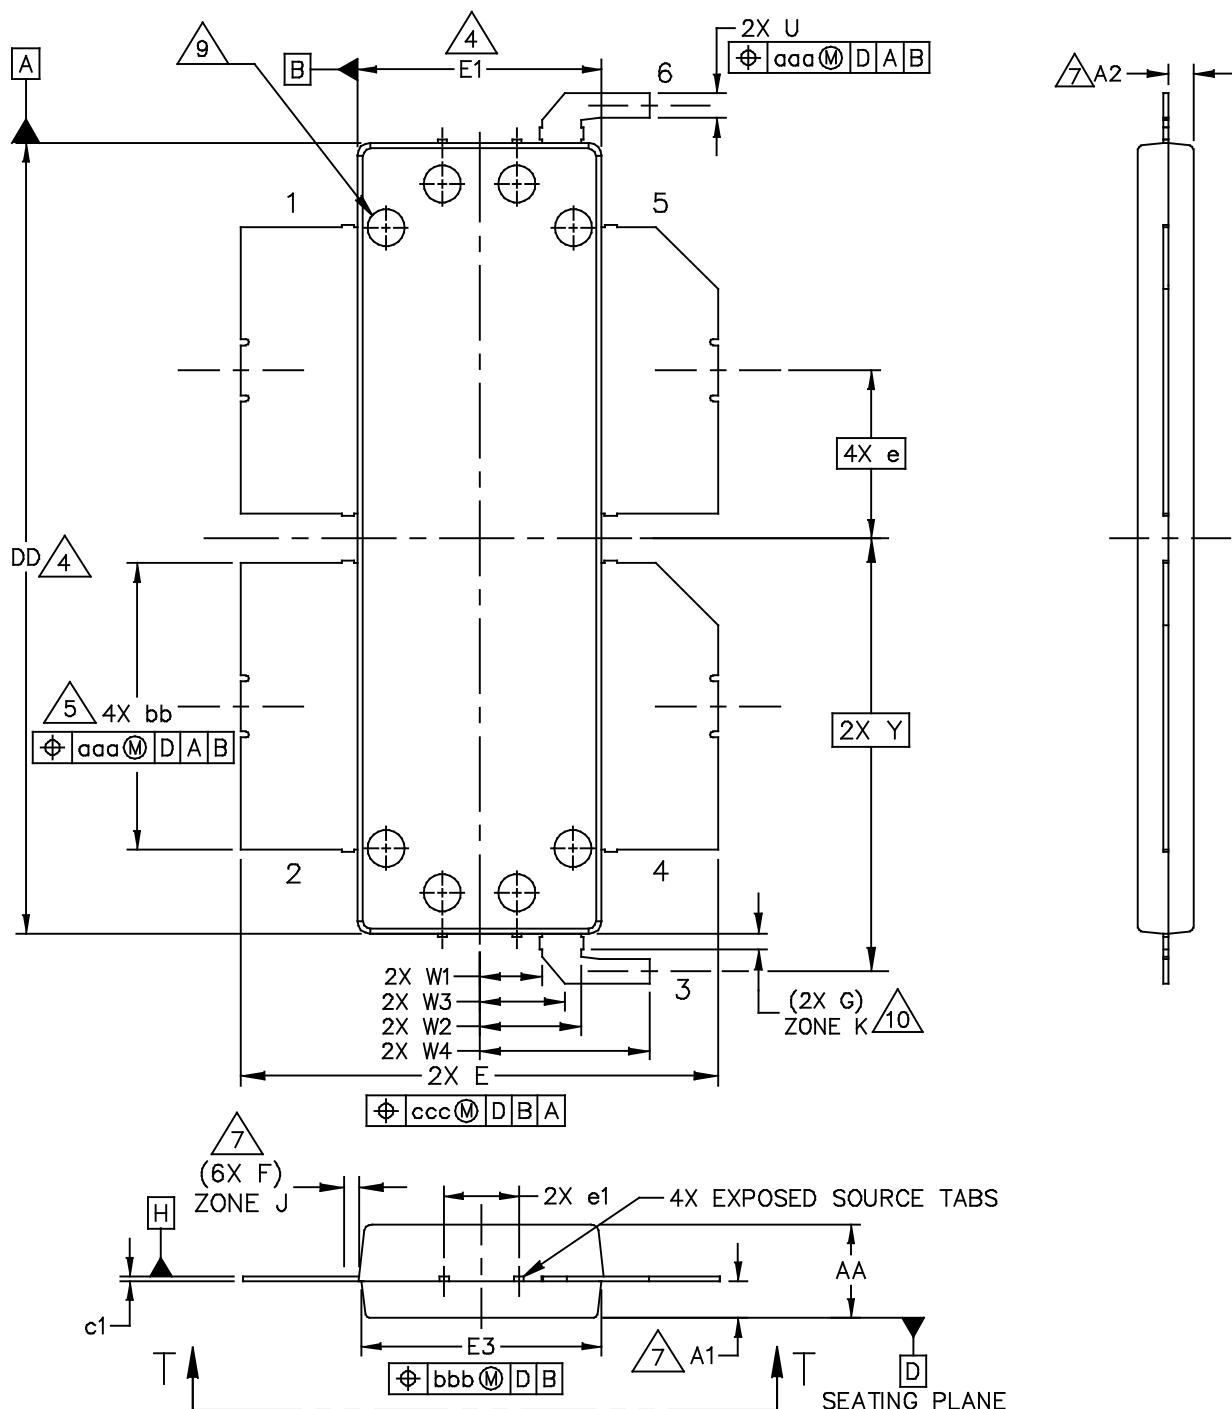

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE
TITLE:  OM-1230-4L2S	DOCUMENT NO: 98ASA00885D	REV: A
	STANDARD: NON-JEDEC	
	SOT1819-2	18 FEB 2016

RF Device Data  
NXP Semiconductors

A2T14H450-23NR6

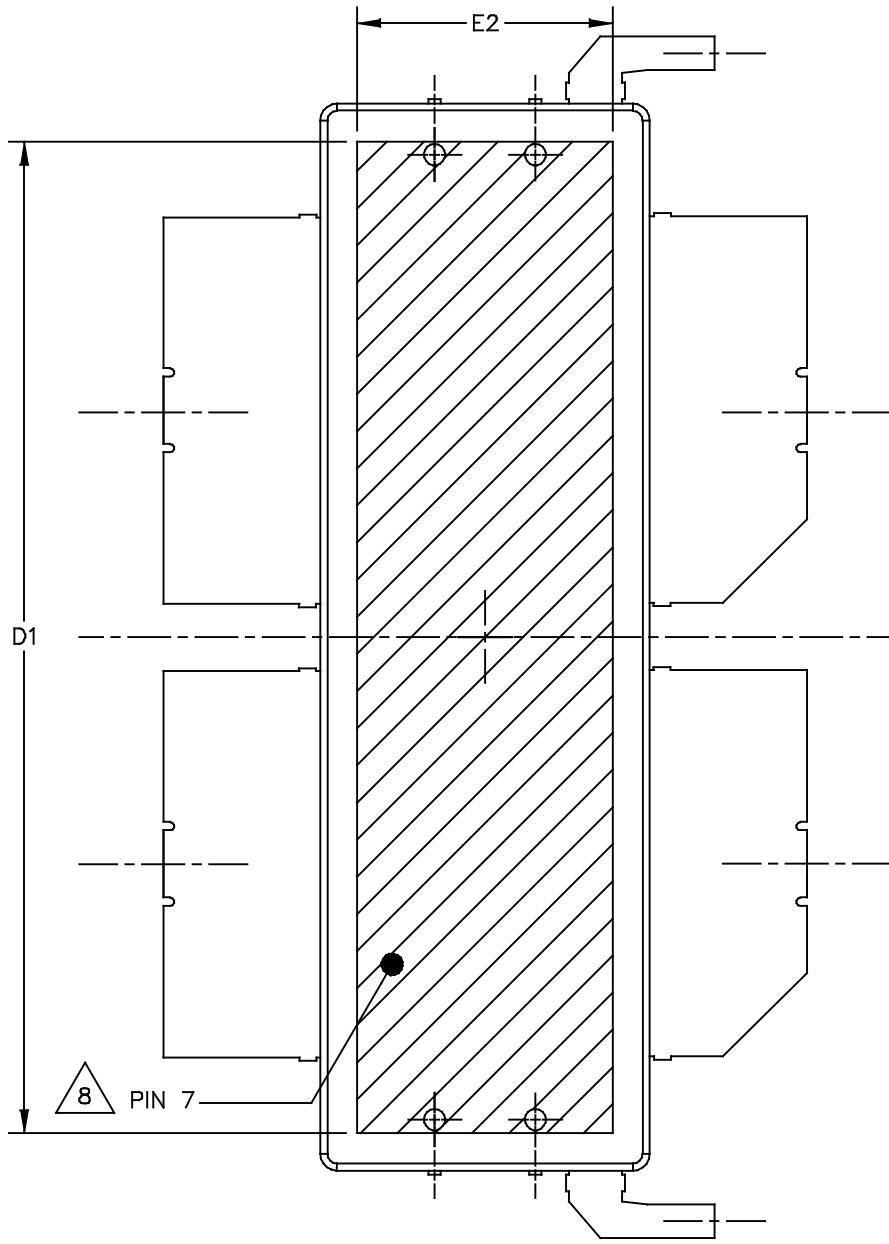

BOTTOM VIEW  
VIEW T-T

© NXP SEMICONDUCTORS N.V.  
ALL RIGHTS RESERVED

MECHANICAL OUTLINE

PRINT VERSION NOT TO SCALE

TITLE:

OM-1230-4L2S

DOCUMENT NO: 98ASA00885D

REV: A

STANDARD: NON-JEDEC

SOT1819-2

18 FEB 2016

NOTES:

1. CONTROLLING DIMENSION: INCH
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. DATUM PLANE H IS LOCATED AT TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.

- 4.** DIMENSIONS DD AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 INCH (0.15 MM) PER SIDE. DIMENSIONS DD AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE H.
- 5.** DIMENSION bb DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 INCH (0.13 MM) TOTAL IN EXCESS OF THE bb DIMENSION AT MAXIMUM MATERIAL CONDITION.
- 6. DATUMS A AND B TO BE DETERMINED AT DATUM PLANE H.
- 7.** DIMENSIONS A1 AND A2 APPLY WITHIN ZONE J ONLY. A1 APPLIES TO PINS 1, 2, 4 AND 5. A2 APPLIES TO PINS 3 AND 6.
- 8.** HATCHING REPRESENTS THE EXPOSED AND SOLDERABLE AREA OF THE HEAT SLUG. THE DIMENSIONS D1 AND E2 REPRESENT THE VALUES BETWEEN THE TWO OPPOSITE POINTS ALONG THE EDGES OF EXPOSED AREA OF HEAT SLUG.
- 9.** DIMPLED HOLE REPRESENTS INPUT SIDE.
- 10.** ZONE K REPRESENTS NON-SOLDERABLE REGION WHERE MOLD FLASH AND RESIN BLEED ARE PERMITTED ON BOTH SIDES OF THE LEADS.

DIM	INCH		MILLIMETER		DIM	INCH		MILLIMETER	
	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX
AA	.148	.152	3.76	3.86	W2	.158	.168	4.01	4.27
A1	.059	.065	1.50	1.65	W3	.132	.142	3.35	3.61
A2	.056	.068	1.42	1.73	W4	.265	.281	6.73	7.14
DD	1.267	1.273	32.18	32.33	U	.037	.043	0.94	1.09
D1	1.180	----	29.97	----	Y	.695	BSC	17.65	BSC
E	.762	.770	19.35	19.56	bb	.457	.463	11.61	11.76
E1	.390	.394	9.91	10.01	c1	.007	.011	0.18	0.28
E2	.306	----	7.77	----	e	.270	BSC	6.86	BSC
E3	.383	.387	9.73	9.83	e1	.116	.124	2.95	3.15
F	.025	REF	0.64	REF	aaa	.004		0.10	
G	.030	REF	0.76	REF	bbb	.006		0.15	
W1	.095	.105	2.41	2.67	ccc	.010		0.25	
© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED				MECHANICAL OUTLINE			PRINT VERSION NOT TO SCALE		
TITLE:  OM-1230-4L2S					DOCUMENT NO: 98ASA00885D		REV: A		
					STANDARD: NON-JEDEC				
					SOT1819-2		18 FEB 2016		

A2T14H450-23NR6

## PRODUCT DOCUMENTATION, SOFTWARE AND TOOLS

Refer to the following resources to aid your design process.

### Application Notes

- AN1907: Solder Reflow Attach Method for High Power RF Devices in Plastic Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers
- AN3789: Clamping of High Power RF Transistors and RFICs in Over-Molded Plastic Packages

### Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

### Software

- Electromigration MTTF Calculator
- .s2p File

### Development Tools

- Printed Circuit Boards

### To Download Resources Specific to a Given Part Number:

1. Go to <http://www.nxp.com/RF>
2. Search by part number
3. Click part number link
4. Choose the desired resource from the drop down menu

## REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
0	Jan. 2017	<ul style="list-style-type: none"><li>Initial release of data sheet</li></ul>

**How to Reach Us:**

**Home Page:**  
[nxp.com](http://nxp.com)

**Web Support:**  
[nxp.com/support](http://nxp.com/support)

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: [nxp.com/SalesTermsandConditions](http://nxp.com/SalesTermsandConditions).

NXP, the NXP logo, Freescale, the Freescale logo, and Airfast are trademarks of NXP B.V. All other product or service names are the property of their respective owners.  
© 2017 NXP B.V.