



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## 1. SCOPE

This specification covers the characteristics of size 0201, Base Metal C0G dielectric, 1.0 pF capacitance, +/- 0.25 pF tolerance, 50 VDC rated ceramic chip capacitors with nickel barrier (90% tin/10% lead) termination.

## 2. DIELECTRIC CHARACTERISTICS - C0G (BN)

|                                  |                                    |
|----------------------------------|------------------------------------|
| Operating Temperature Range:     | -55°C to +125°C                    |
| Temperature Coefficient:         | 0 +/- 30 ppm/°C                    |
| Dissipation Factor:              | 0.1% Max. @ 25°C                   |
| Insulation Resistance, 25°C:     | >10 Giga-Ohms                      |
| Dielectric Withstanding Voltage: | 125 VDC                            |
| Aging Rate:                      | 0% per decade                      |
| Test Parameters:                 | 1MHz, 1.0 Volts +/- 0.2 Vrms, 25°C |

## 3. PHYSICAL DIMENSIONS ( NOT SCALED )

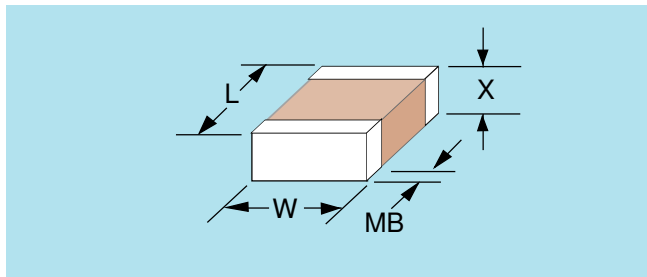

| Dimensions  | L            | W            | X           | MB          |
|-------------|--------------|--------------|-------------|-------------|
| Inches (mm) | .0235 (0.6)  | .0118 (0.3)  | .013 (0.33) | .006 (0.15) |
| +/- in (mm) | .0015 (0.03) | .0012 (0.03) | Max         | .002 (0.05) |

## 4. PART NUMBER DESCRIPTION

### 0201 BN 1R0 C 500 Y T

|      |  |
|------|--|
| 0201 | = Size   |
| BN   | = C0G Dielectric (Base Metal Electrodes)   |
| 1R0  | = Capacitance Code (pF): R denotes decimal (1R0 = 1.0 pF)                                  |
| C    | = Capacitance tolerance: C = +/- 0.25 pF   |
| 500  | = DC Voltage Rating: First two digits are significant, third digit denotes number of zeros |
| Y    | = Termination: Nickel Barrier with 90% Tin / 10% Lead                                      |
| T    | = Packaging: Tape and Reel   |

REVISION: A

NOVACAP P/N: 0201BN1R0C500YT  
 CUSTOMER:  
 CUST. P/N:

SPEC DESIGNER           MK 5/25/17            
 SPEC MANAGER           MK FOR BN 5/25/17            
 ENGINEERING           MK FOR BN 5/25/17