

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









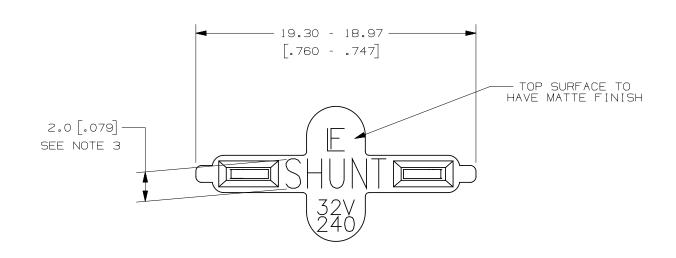

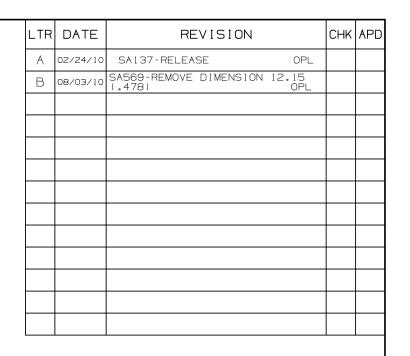

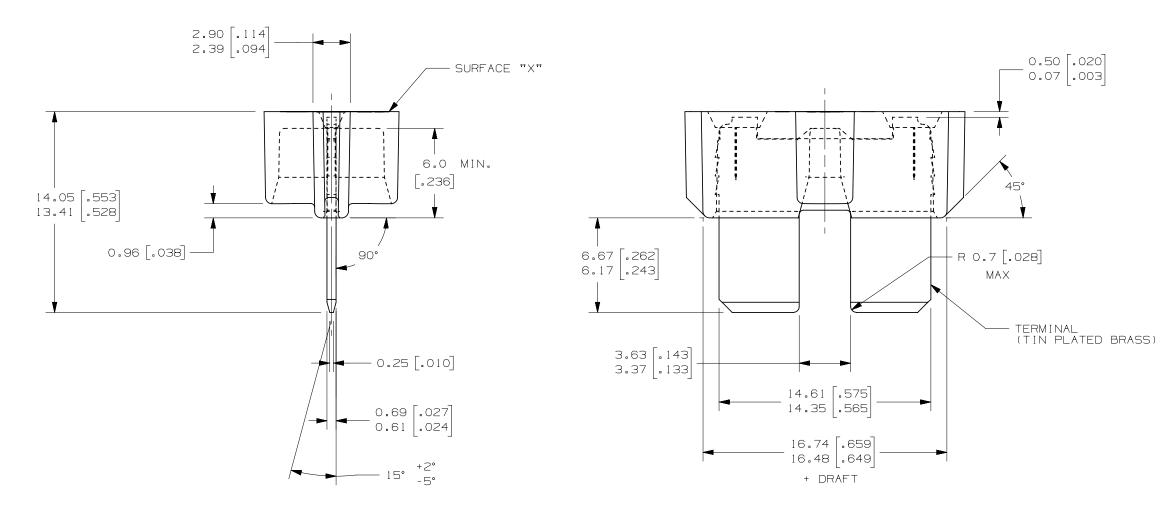

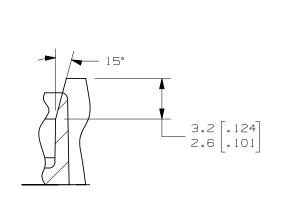

SECTION A - A TERMINAL OMITTED SCALE 4:1

NOTES:

- SHUNT BODY IS TO BE MADE OF A WHITE THERMOPLASTIC MATERIAL, UL94 V-O RATED.
 ALL CHARACTERS ARE TO BE INDENTED IN TOP SURFACE.
 CHARACTERS "SHUNT" SHALL BE MOLDED INTO PART AND ORIENTATION MAY BE ROTATED 180° FROM INDICATED POSITION SHOWN.
 DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES.
 THE REGISTRATION BETWEEN THE 16.74/16.48 AND 14.35/14.61
 DIMENSIONS MUST BE HELD WITHIN ±.13.

	2.00 +0.20 [.079 +.008]	
SURFACE "X"	A	
		9.2 [.362]
-	4.0 [.157]	- 3.6 [.142]

-					
-					
-					
NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M	
BILL OF MATERIAL					

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

0	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE MATL SPEC

COF	PIES	ТО	111/1/12 31 23	SEE NOTE		
1 2 3	9 10 12	18 19 20	FINISH			
4 5	1 3 1 4	21	DRW OPL	DATE 03/09/10	SCALE	4 : 1
6	15	33	СНК	DATE	SUPER	DR
/ 8	16 17	43 53	APPD	DATE	FINSH	GOOD WT GRAMS/PIEC

TOLERANCE UNLESS OTHERWISE SPECIFIED ONE PLACE DEC +/-.3
TWO PLACE DEC +/-.25 THREE PLACE DEC +/-.100 3RD ANGLE TITLE PROJECTION

ATO SHUNT ASSEMBLY

OUTLINE REVISION DRWG. NO. 02400094P-WH

ALLOWED

CHANGES

PENCIL

- NO

DRAWING

GENERATED

CAD