



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# AEDS-9310

## Transmissive Photointerrupter



### Data Sheet

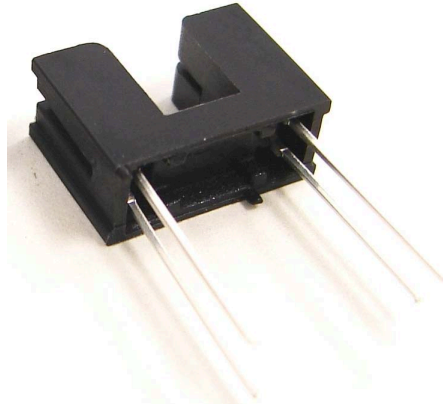

#### Description

The photointerrupter consists of a Gallium Arsenide infrared light emitting diode and a NPN silicon phototransistor built in a black plastic housing. It is a transmissive subminiature photointerrupter.

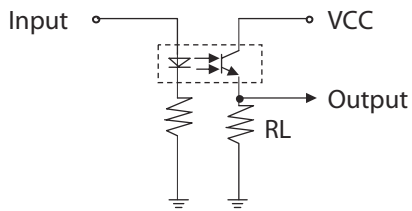


Figure 1: Illustrates Basic Configuration of Photointerrupter

#### Features

- Non-Contact Sensing
- Infra-Red Wavelength
- Fast Switching Speed
- Mounting Guide Pins
- Dual-in-line Socket Mounting
- RoHS Compliant

#### Applications

- Optical Switch
- ATM Machines
- Vending Machines
- Edge, Position Detections
- Office Automation Equipments

## Theory of Operation

The photo-interrupter consists of an Infrared light source and a photo-diode in a single Dual-in-Line package. The photo-interrupter could be mounted onto a PC board with a current-limiting resistor in series externally with the Infrared Emitting Diode. With this, such input voltage for the emitting diode could share the same voltage level as VCC.

Regarding the photo-interrupter output, there will always be current output measured but with the external resistor, RL connected as shown in Figure1, analog voltage output could then be obtained.

With both the infrared light source and the photo diode in a single package, the photo-interrupter employs transmissive technology to sense obstacles existence, acts as on / off switchers or even to sense low-resolution rotary or linear motions. The photo-interrupter is specified for operation over -25 °C to +85 °C temperature range.

As a basic switcher, the photo-interrupter would have a position detecting characteristics as shown in Figure 2. These characteristic diagrams give the relationship between Relative Light Current, IL and Distance of displacement, d. Note that the slot (obstacle) introduced in between the emitting diode and the photo-diode could be applied in two directions. One is of X-axis and another would be of Y-axis.

Therefore, with the presence of slot, the photo-interrupter would actually give a low logic output. Vice versa, the photo-interrupter will provide a high logic output without the existence of the slot. Refer to Figure 3. Typically, Rise Time, tr and Fall Time tf will have the same value, 20µs.

With special design of the slots, periodic presence and absence could be generated. Such output signal is useful in determining low-resolution (>0.5mm pitch) motor rotation positioning and motor spinning speed.

## Sensing Position Characteristics

(Typical)

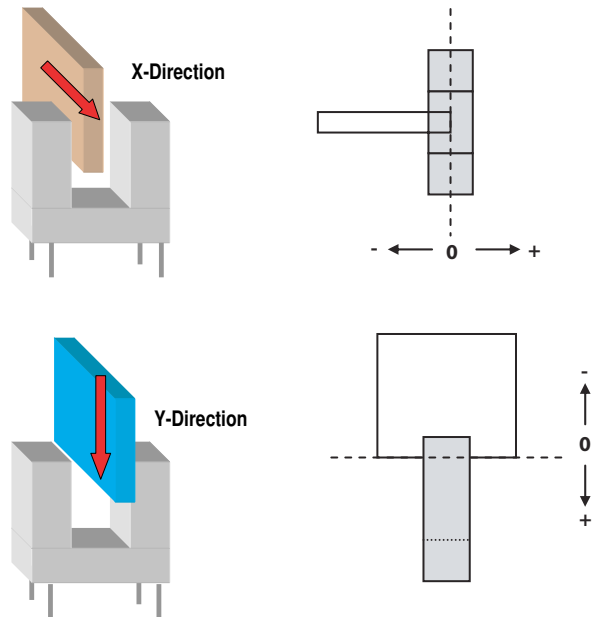
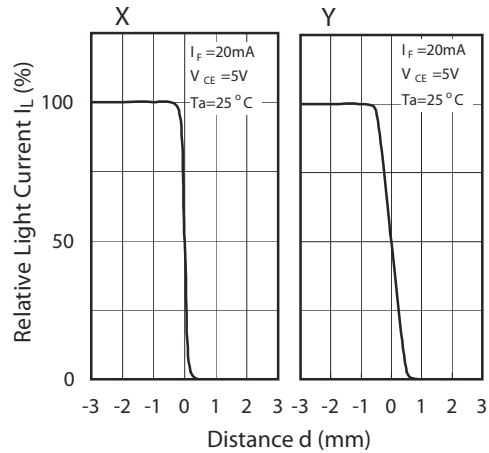


Figure 2: Illustrates Photo-Interrupter Positioning Sensing Characteristics. Obstacles (Slots) could interrupt along X-axis or Y-axis.

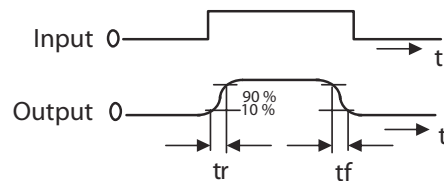


Figure 3: Response Time Measurement of Output Signal.



Figure 4: Periodical Output signal could be used to determine the Motor Spinning Speed and Rotation positioning.


### Absolute Maximum Ratings @ TA=25°C

Parameter	Maximum Rating	Unit
LED Reverse voltage $V_R$	5	V
LED Forward current $I_F$	50	mA
LED Power dissipation $P_E$	75	mW
Collector Emitter voltage $V_{CEO}$	30	V
Emitter Collector voltage $V_{ECO}$	5	V
Collector Power dissipation $P_C$	75	mW
Total Power dissipation $P_{TOT}$	100	mW
Operation temperature range $T_A$	-25°C to 85°C	
Storage temperature range	-40°C to 85°C	
Soldering temperature	260°C for 5 seconds	

### Optical-Electrical Characteristics TA=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
LED Forward voltage	$V_F$	-	1.2	1.4	V	$I_F=20\text{mA}$
LED Reverse Current	$I_R$	-	-	10	A	$V_R=5\text{V}$
Collector Current	$I_C$	0.5	-	10	mA	$I_F=20\text{mA}, V_{CE}=5\text{V}$
Collector dark current	$I_{CEO}$	-	-	100	nA	$V_{CE}=10\text{V}$
Collector Emitter saturation voltage	$V_{CE(SAT)}$	-	-	0.4	V	$I_e=0.1\text{mA}, E_e=0.1\text{mW/cm}^2$
Rise time	$T_r$	-	20	100	$\mu\text{s}$	$V_{CE}=5\text{V}, R_L=1\text{k}\Omega, I_C=100\text{mA}, d=1\text{mm}$
Fall time	$T_f$	-	20	100	$\mu\text{s}$	

# Outline Drawing

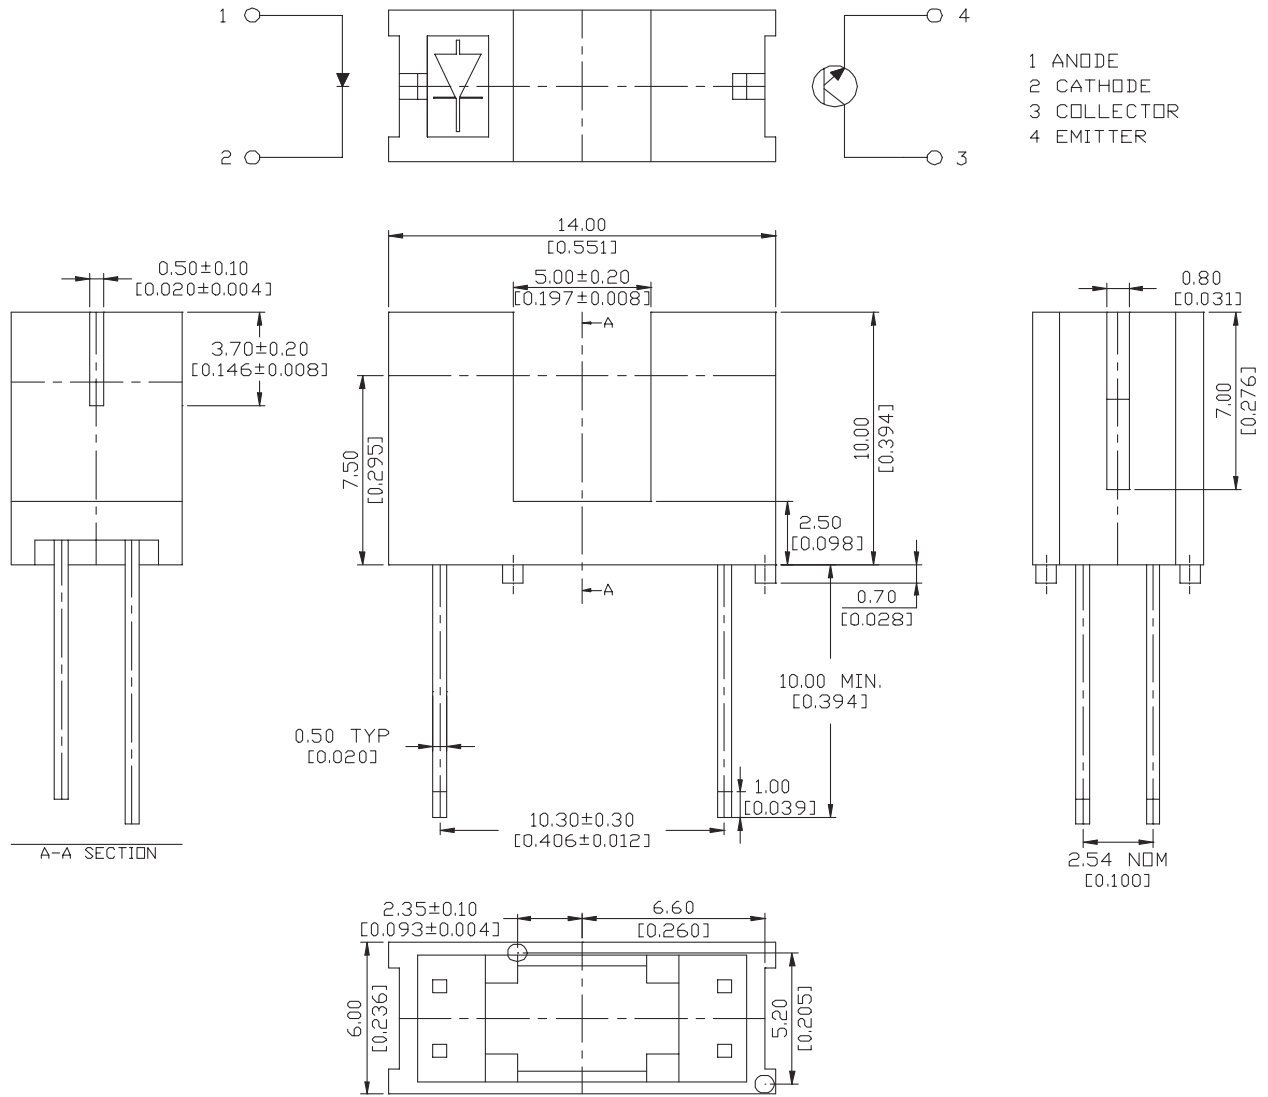

Tolerance is +/- 0.25 mm (.006") unless otherwise specified  
 Unit: mm (inches)

### Typical Optical-Electrical Curves

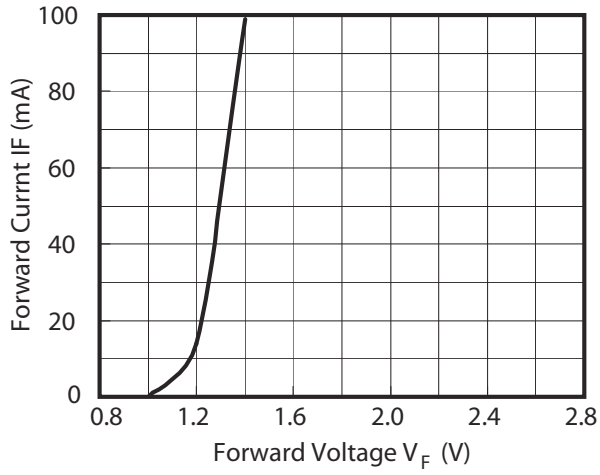


Figure 5: Forward Current Vs Forward Voltage

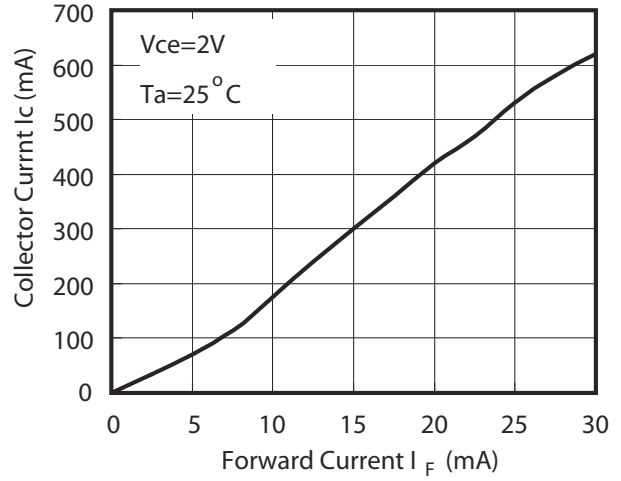


Figure 6: Collector Current Vs Forward Voltage

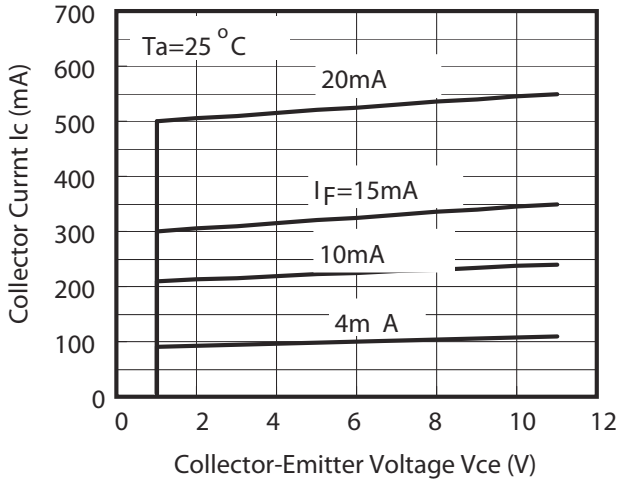


Figure 7: Collector Current Vs Vce

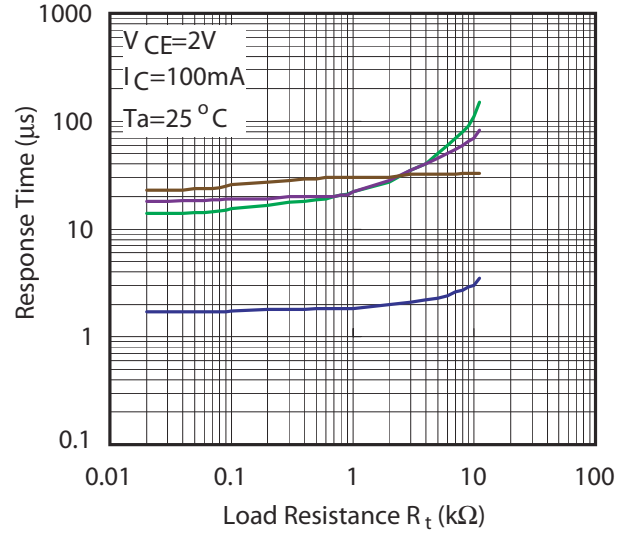


Figure 8: Response Time Vs Load Resistance

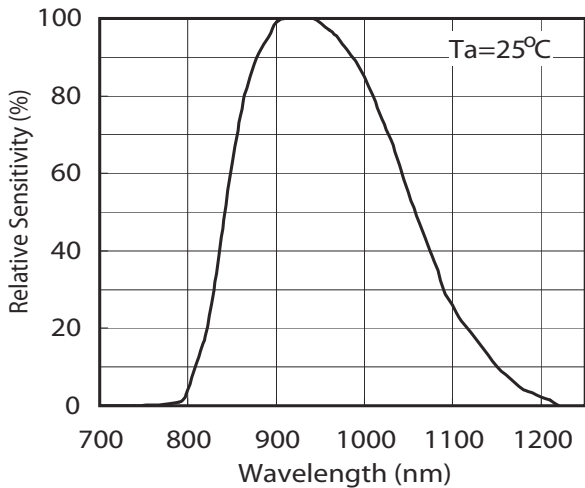


Figure 9: Spectral Sensitivity (Detecting Side)

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries.  
Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved.  
AV01-0364EN - August 21, 2006

