



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China
















Phoenix Contact offers the broadest range of feed-through terminal blocks in the industry and the application assistance to satisfy your termination requirements.

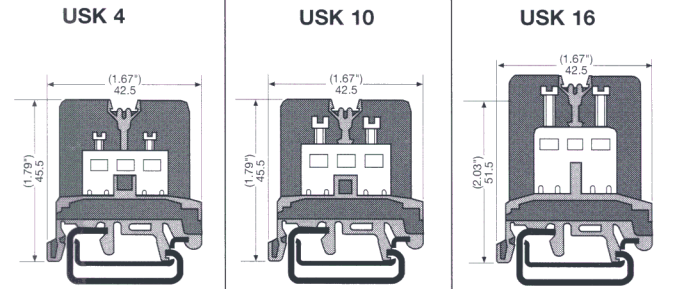

## OPEN CONSTRUCTION "USK" NEMA TERMINAL BLOCKS



| Part Number                            | 0260015       | 0261014      | 0261027      |
|--|---------------|--------------|--------------|
| Min./Max. Wire Size                    | #28 - #12 AWG | #26 - #8 AWG | #24 - #6 AWG |
| Terminal Width                         | 6.2 mm        | 8.2 mm       | 10.2 mm      |
| Number of Terminations per Linear Foot | 49            | 37           | 30           |
| UL/CSA Rating (voltage)                | 600V          | 600V         | 600V         |
| Maximum Current UL/CSA                 | 20A/25A       | 50A/50A      | 65A/65A      |

|   |   |   |   |   |  |         |
|---|---|---|---|---|--|---------|
| End Cover   | D-USK 4/10 0260028  |   | D-USK 4/10 0260028  |   | D-USK /16 0261030  |         |
| End Clamps  | E/UK 1201442  |   | E/UK 1201442  |   | E/UK 1201442   |         |
| DIN-Rail  | Unperforated NS 35/7.5 0801681<br>Perforated NS 35/7.5 0801733                |   | Unperforated NS 35/7.5 0801681<br>Perforated NS 35/7.5 0801733                      |   | Unperforated NS 35/7.5 0801681<br>Perforated NS 35/7.5 0801733 |         |
| <b>Fixed Bridge Bar</b> , for cross connections in terminal center, 10 position, divisible, with 10 screws  | FB 10   |    |   |   |  |         |
| <b>Fixed Bridge Bar</b> , same as above with insulating collars   | FBI 10  |    |   |   |  |         |
| <b>Fixed Bridge Bar</b> , for cross connections in terminal center, bridge bar, screws and spacers unassembled without insulating collars on screw heads  | FBR 10  |   |   |   |  |         |
| <b>Fixed Bridge Bar</b> , same as above, only fully assembled with insulated collars on screw heads, 10 position, divisible                               | FBRI 10   |  |   |   |  |         |
| <b>Insertion Bridge</b> , insulated 2 position, insulated 3 position, Insulated back, divisible 10 position   | EB 10   |  | EB 2-6 0201155<br>EB 3-6 0201142<br>EB 10-6 0201139                                 | EB 2-8 0202154<br>EB 3-8 0202141<br>EB 10-8 0202138 | EB 10-10 0203137   |         |
| <b>L-Bridge</b> , connections divisible, parallel cross bridging of 2 potentials at offset installation, screw insulation: colored to identify potentials | LB 10   |  |   |   |  |         |
| <b>L-Bridge</b> , as above only in positions of 100   | LB 100  |   |   |   |  |         |
| <b>Isolator Bridge Bar</b> , for switchable branches with bridge bar isolator IS-K 4, 10 position, divisible with 10 screws                               | ISSBI 10<br>W/IS-K4   |  |   |   |  |         |
| <b>Fixed Bridge Bar</b> , for long cross connections when bridging consecutive terminal blocks not required   | FB 150 M (RAIL)<br>ZS-6   |   |   |   |  |         |
| <b>"Quick" Strip Marker, Unprinted</b> white plastic, 10-section, divisible, for labeling with marker pen   | ZB 5  |  |   |   |  |         |
|   | ZB 6  |   | 1051003   |   |  |         |
|   | ZB 8  |   |   | 1052002   |  |         |
|   | ZB 10   |   |   |   | 1053001  |         |
| <b>"Quick" Strip marker, Printed</b> white plastic, 10-section, divisible, printed with consecutive numbers   | Printed Horizontally<br>ZB5, LGS:*<br>ZB6, LGS:*<br>ZB8, LGS:*<br>ZB10, LGS:* |  | 1051016   |   |  |         |
|   |   |   |   | 1052015   |  |         |
|   | Printed Vertically<br>ZB5,QR:*<br>ZB6,QR:*                                    |   |  | 1051029   |  | 1053014 |

\* Number sequence must be specified in decade increments, i.e., 1-10, 11-20, etc., up to 991-1000. Custom markers available upon request.