



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



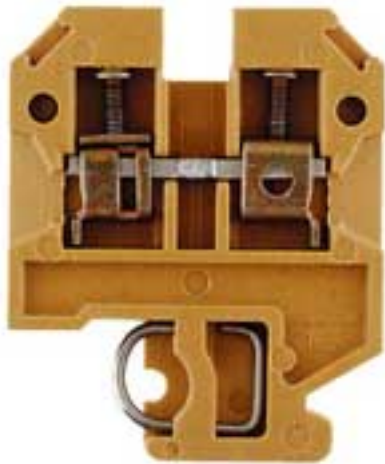

SAK 2.5 027962

#### General ordering data

Order No.	0279620000
Part designation	SAK 2.5 KRG
Version	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, KrG, Medium yellow, TS 32
EAN	4008190100087
Qty.	100 pc(s).

#### Product notes

Note, technical data	With twin ferrules ZH 0.5 to ZH 1.5, rated voltage is 690 V.
----------------------	--

#### PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA97ATEX1798U
Download, German	KEMA97ATEX1798U_d.pdf
Download English	KEMA97ATEX1798U_e.pdf
IECEX Certificate of Conformity	IECEXKEM06.0014U
ATEX voltage	550 V
ATEX current	21 A
ATEX conductor cross-section	2.5 mm <sup>2</sup>
IECEX voltage	550 V
IECEX current	21 A
IECEX conductor cross-section	2.5 mm <sup>2</sup>
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEX-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

#### Additional technical data

Colour of insulating material	Medium yellow
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 32
Insulating material	KrG
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 60 °C, + 130 °C
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	5VA
Version	Feed-through terminal

#### CSA rating data

Voltage (CSA)	600 V
CSA current	25 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 10

#### Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm <sup>2</sup>

#### Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	6 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	10 mm
Clamping screw	M 2.5
Blade size	0.6 x 3.5 mm
Tightening torque range	0.4...0.6 Nm
Torque level with DMS electric screwdriver	1
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	6 mm <sup>2</sup>
Stranded, min.	0.5 mm <sup>2</sup>
Stranded, max.	4 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	4 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm <sup>2</sup>



#### Conductors for clamping (rated connection)

Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	2.5 mm <sup>2</sup>
Twin wire-end ferrule, min.	0.5 mm <sup>2</sup>
Twin wire end ferrule, max.	1.5 mm <sup>2</sup>
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 10
AWG conductor size, min.	0.13 mm <sup>2</sup>
AWG conductor size, max.	5.26 mm <sup>2</sup>

#### Dimensions

Width	6 mm
Height of lowest version	46.5 mm
Length	36.5 mm
TS 32 offset	18.5 mm

#### Disconnect terminals

Torque level with DMS electric screwdriver	1
--	---

#### Rating data

Rated cross-section	2.5 mm <sup>2</sup>
Rated voltage	800 V
Rated impulse voltage	8 kV
Rated current	24 A
Standards	IEC 60947-7-1
Current with max. conductor	32 A
Pollution severity	3

#### UL rating data

Voltage (UL)	600 V
Current (UL)	20 A
Min. cross-section (UL)	AWG 22
Max. cross-section (UL)	AWG 12

#### Approvals

Approvals institutes



#### Downloads

STEP	0279620000_04617_SAK_2.5_KRG_STP.stp
------	--------------------------------------

#### Classifications

ETIM 2.0	EC000897
ETIM 3.0	EC000897
eClass 4.1	27-14-11-20
eClass 5.0	27-14-11-20
eClass 5.1	27-14-11-20

#### Similar products

Order No.	Part designation	Version
0279670000	SAK 2.5 KRG/BL	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, KrG, blue, TS 32