



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PROTO TERMINAL BLOCKS TINYSHIELD

ASD2005-R-T-I

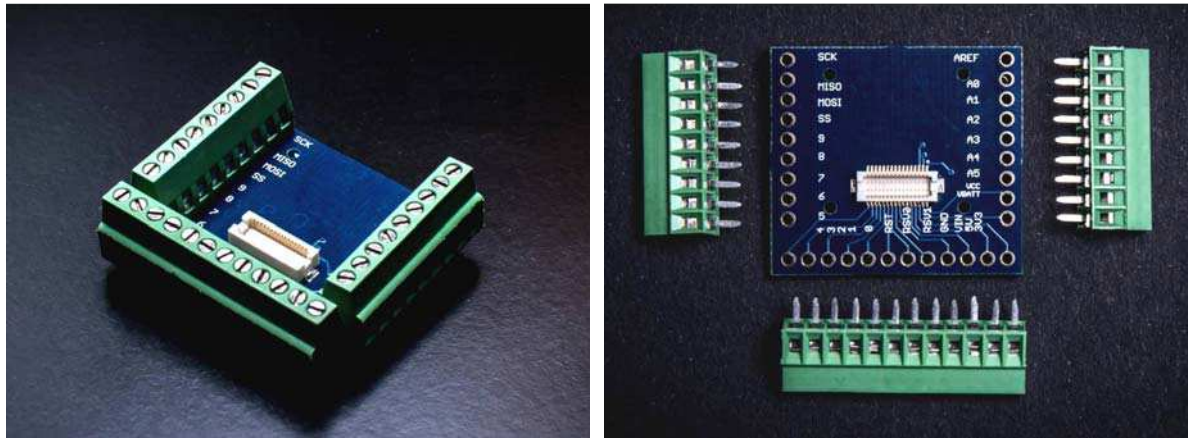

DESCRIPTION

This board makes prototyping with the TinyDuino simple! We added screw terminals to every one of the signals available so you can create projects without having to solder. Just place a wire into the signal that you need and screw it down with a small screwdriver.

All of the shield signals are supported and are spaced with 0.1" spacing. They're placed along the edge of the board, which extends past the normal width of the TinyDuino and TinyShield boards; this enables easy access of any of the shield signals. Additional TinyShields can be placed on top of this proto board, so it can be located anywhere in your project's TinyDuino stack.

There are three options when ordering this board:

1. No Terminal Blocks – Just the board itself without the terminal blocks. You can solder or clip onto any of the signals.

2. You Install the Terminal Blocks – The terminal blocks are shipped along with the board, so you can solder them on yourself.

3. Terminal Blocks Installed – We solder the terminal blocks here and you receive the completed unit.

*To learn more about the **TinyDuino Platform**, click [here](#)*

<https://tinycircuits.com/pages/tinyduino-overview>

TECHNICAL DETAILS

Pins Supported

- All Shield signals supported
- VCC, VBATT,+3V3, +5V, VIN, GND, RSV2, RSV1, RSV0, RESET, 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, SS, MOSI, MISO, SCK, AREF, A0, A1, A2, A3, A4/SDA, A5/SDL

Dimensions

- 36mm x 36mm (1.417 inches x 1.417 inches)
- Max Height without Terminal Blocks (from lower bottom TinyShield Connector to upper PCB level): 2.81mm (0.111 inches)
- Max Height with Terminal Blocks (from lower bottom TinyShield Connector to upper PCB level): 11.81mm (0.465 inches)
- Weight without Terminal Blocks: 1.52 grams
- Weight with Terminal Blocks: 9.30 grams

NOTES

- The terminal blocks will make it not possible to plug a USB Cable into a Side Mount USB TinyShield. Plan to use the Top Side Mount USB TinyShield instead