

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








### **Technical Data Sheet**

# Rosenberger

Glass Seal

02Z101-000

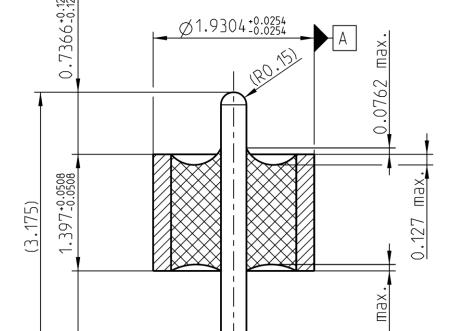



All dimensions are in mm; tolerances according to ISO 2768 m-H

 $\emptyset$ 0.3048 $^{+0.0254}_{-0.0254}$ 

Interface

N/A

**Documents** 

Test procedure

02 PV-E001

**Material and plating** 

Connector parts
Center contact
Outer contact

Dielectric

Material Plating

Kovar Gold, min. 1.27  $\mu$ m, over chemical nickel Kovar Gold, min. 1.27  $\mu$ m, over chemical nickel

 $\emptyset$ 0.0762

Corning 7070 glass

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Page

Tel. : +49 8684 18-0 Email : <u>info@rosenberger.de</u>

1/2

Technical Data Sheet	Rosenberger		
Glass Seal	02Z101-000		

#### **Electrical data**

 $\begin{array}{ll} \text{Impedance} & 50~\Omega \pm 2~\Omega \\ \text{Frequency} & \text{DC to 40 GHz} \end{array}$ 

Return loss  $\geq$  19 dB, DC to 40 GHz Insertion loss  $\leq$  0.1 x  $\sqrt{f(GHz)}$  dB

 $\begin{array}{ll} \mbox{Insulation resistance} & \geq 10 \ \mbox{G}\Omega \\ \mbox{Dielectrict with standing voltage} & 500 \ \mbox{V rms} \end{array}$ 

- Test of scattering parameters in according to Rosenberger test procedure 02 PV-E001 -

#### Mechanical data

Center contact captivation

 $\geq$  5 N

#### Environmental data

Temperature range  $-65^{\circ}$ C to  $+165^{\circ}$ C Max. soldering temperature  $+300^{\circ}$ C Hermeticity  $\leq 10^{-8}$  mbar x l/s compliant

**Tooling** 

N/A

Suitable cables

N/A

Weight

0.02 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
H. Babinger	23.02.05	F. Reiner	26.06.18	f01	18-1026	M. Ruf	25.06.18

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 2/2