



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TINY BATTERY CHARGER

ASL2112

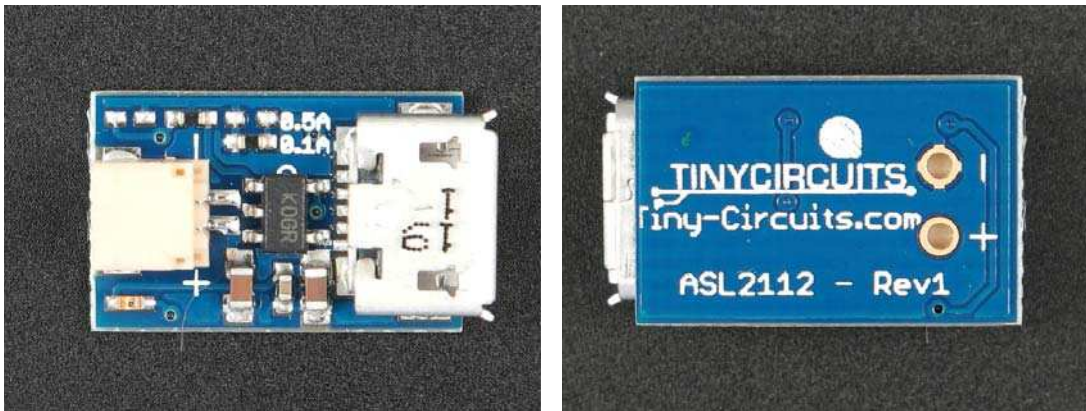

DESCRIPTION

This is a standalone Lithium battery charger which lets you charge up your batteries from a micro USB cable. The battery can connect to a JST SH connector (the battery connector on the batteries that we sell at TinyCircuits). You can also use this without the JST connector with two large through holes to connect to an battery pack.

Simply plug the USB side with a cable into a USB port, and plug a lithium polymer or lithium ion rechargeable (3.7V / 4.2V) battery into the other side and it will start charging. A status LED on the board will indicate when charging, and will turn off when fully charged.

Note: The battery and the microUSB cable are not included.

TECHNICAL DETAILS

- 2-Pin JST SH Connector for battery connection
- Includes two solder tabs to connect directly to battery terminals if desired
- 100 mA charge current (can be set to 500mA with a resistor change)
- Status LED indicates when charging
- Robust Gold Finish – makes soldering easy and is non-corrosive

Dimensions

- Dimensions: 12mm x 7mm (0.472 inches x 0.276 inches)
- Max Height: 3.7mm (0.146 inches)
- Ultra-thin 0.61mm (0.024 inches) PCB
- Weight: 0.32 grams (0.011 ounces)

NOTES

- The charge current can be changed to 500mA by removing R3 and putting a 2K resistor in the R2 position.

