

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


For board-to-FPC

**Narrow pitch connectors
(0.35mm pitch)**


A35S

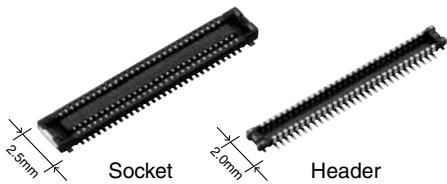

RoHS compliant

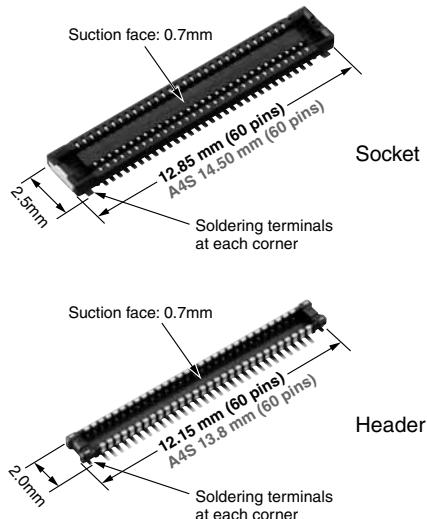

2. **“TOUGH CONTACT”** ensures high resistance to various environments in lieu of its space-saving footprint.

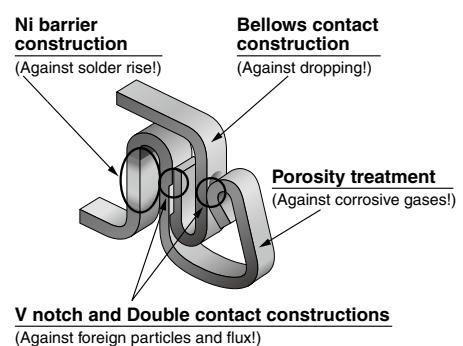

1. Small size (Terminal pitch: 0.35 mm, width: 2.5 mm and Mated height: 0.8 mm)
2. “TOUGH CONTACT” ensures high resistance to various environments in lieu of its space-saving footprint.
3. Low-profile connector with up to 100 pin contacts.
4. Soldering terminals at each corner enhance mounting strength.
5. Simple lock structure provides tactile feedback to ensure excellent mating/unmating operation feel.
6. Connectors for inspection available.

APPLICATIONS

Board-to-FPC connections in mobile equipment that requires size and thickness reduction and functionality enhancement.

ORDERING INFORMATION

AXE 1 2

7: Narrow Pitch Connector A35S (0.35 mm pitch) Socket
8: Narrow Pitch Connector A35S (0.35 mm pitch) Header

Number of pins (2 digits)

Mated height

<Socket> / <Header>

1: For mated height 0.8 mm

Functions

2: Without positioning bosses

Surface treatment (Contact portion / Terminal portion)

<Socket>

7: Base: Ni plating, Surface: Au plating (for Ni barrier available)

<Header>

4: Base: Ni plating, Surface: Au plating

PRODUCT TYPES

| Mated height | Number of pins | Part number | | Packing | |
|--------------|----------------|-------------|-----------|-----------------------|---------------|
| | | Socket | Header | Inner carton (1-reel) | Outer carton |
| 0.8mm | 10 | AXE710127 | AXE810124 | 5,000 pieces | 10,000 pieces |
| | 12 | AXE712127 | AXE812124 | | |
| | 16 | AXE716127 | AXE816124 | | |
| | 20 | AXE720127 | AXE820124 | | |
| | 24 | AXE724127 | AXE824124 | | |
| | 30 | AXE730127 | AXE830124 | | |
| | 34 | AXE734127 | AXE834124 | | |
| | 40 | AXE740127 | AXE840124 | | |
| | 44 | AXE744127 | AXE844124 | | |
| | 50 | AXE750127 | AXE850124 | | |
| | 54 | AXE754127 | AXE854124 | | |
| | 60 | AXE760127 | AXE860124 | | |
| | 64 | AXE764127 | AXE864124 | | |
| | 70 | AXE770127 | AXE870124 | | |
| | 80 | AXE780127 | AXE880124 | | |
| | 100 | AXE700127 | AXE800124 | | |

Notes: 1. Order unit:

For volume production: 1-inner carton (1-reel) units

For samples, please contact our sales office.

2. Please contact us for connectors having a number of pins other than those listed above.

SPECIFICATIONS

1. Characteristics



| Item | | Specifications | Conditions |
|-------------------------------|---|--|--|
| Electrical characteristics | Rated current | 0.25A/pin contact (Max. 4 A at total pin contacts) | |
| | Rated voltage | 60V AC/DC | |
| | Dielectric strength | 150V AC for 1 min. | No short-circuiting or damage at a detection current of 1 mA when the specified voltage is applied for one minute. |
| | Insulation resistance | Min. 1,000MΩ (initial) | Using 250V DC megger (applied for 1 min.) |
| | Contact resistance | Max. 100mΩ | Based on the contact resistance measurement method specified by JIS C 5402. |
| Mechanical characteristics | Composite insertion force | Max. 0.981N/pin contact × pin contacts (initial) | |
| | Composite removal force | Min. 0.165N/pin contact × pin contacts | |
| | Contact holding force (Socket contact) | Min. 0.20N/pin contact | Measuring the maximum force. As the contact is axially pull out. |
| | Ambient temperature | −55°C to +85°C | No icing or condensation. |
| Soldering heat resistance | Peak temperature: 260°C or less (on the surface of the PC board around the connector terminals) | | Infrared reflow soldering |
| | 300°C within 5 sec. 350°C within 3 sec. | | Soldering iron |
| | Storage temperature | −55°C to +85°C (product only) −40°C to +50°C (emboss packing) | No icing or condensation. |
| Environmental characteristics | Thermal shock resistance (header and socket mated) | 5 cycles, insulation resistance min. 100MΩ, contact resistance max. 100mΩ | Conformed to MIL-STD-202F, method 107G |
| | | | Order Temperature (°C) Time (minutes) |
| | | | 1 $-55\frac{0}{-3}$ 30 |
| | | | 2 $\frac{0}{-5}$ Max. 5 |
| | | | 3 $85\frac{0}{-3}$ 30 |
| | | | 4 $\frac{0}{-55}$ Max. 5 |
| Lifetime characteristics | Humidity resistance (header and socket mated) | 120 hours, insulation resistance min. 100MΩ, contact resistance max. 100mΩ | Conformed to IEC60068-2-78 Bath temperature 40°C±2°C, humidity 90% to 95% R.H. |
| | Saltwater spray resistance (header and socket mated) | 24 hours, insulation resistance min. 100MΩ, contact resistance max. 100mΩ | Conformed to IEC60068-2-11 Bath temperature 35°C±2°C, saltwater concentration 5%±1% |
| | H ₂ S resistance (header and socket mated) | 48 hours, contact resistance max. 100mΩ | Bath temperature 40°C±2°C, gas concentration 3 ppm ±1 ppm, humidity 75% to 80% R.H. |
| Lifetime characteristics | Insertion and removal life | 30 times | Repeated insertion and removal speed of max. 200 times/hours |
| Unit weight | | 60 pin contacts Socket: 0.03 g Header: 0.02 g | |

2. Material and surface treatment

| Part name | Material | Surface treatment |
|------------------|---------------------|--|
| Molded portion | LCP resin (UL94V-0) | — |
| Contact and Post | Copper alloy | Contact portion: Base: Ni plating, Surface: Au plating Terminal portion: Base: Ni plating, Surface: Au plating (except the terminal tips) The socket terminals close to the portion to be soldered have nickel barriers (exposed nickel portions). Soldering terminals: Sockets: Base: Ni plating, Surface: Pd+Au flash plating (except the terminal tips) Headers: Base: Ni plating, Surface: Au plating (except the terminal tips) |




DIMENSIONS (Unit: mm)

Socket (Mated height: 0.8 mm)

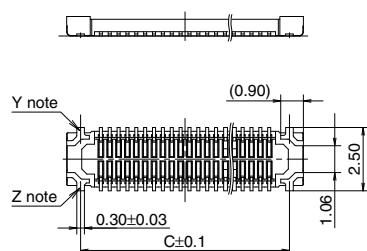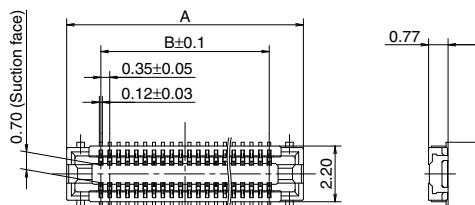
CAD Data

General tolerance: ±0.2

Note: Since the soldering terminals has a single-piece construction, sections Y and Z are electrically connected.

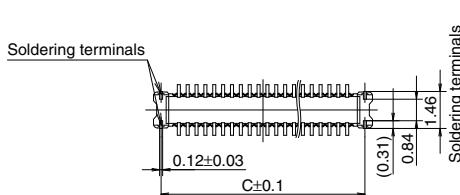Header (Mated height: 0.8 mm)**CAD Data**

General tolerance: ±0.2

• Socket and Header are mated**Dimension table (mm)**

| Number of pins/ dimension | A | B | C |
|---------------------------|-------|-------|-------|
| 10 | 4.10 | 1.40 | 3.00 |
| 12 | 4.45 | 1.75 | 3.35 |
| 16 | 5.15 | 2.45 | 4.05 |
| 20 | 5.85 | 3.15 | 4.75 |
| 24 | 6.55 | 3.85 | 5.45 |
| 30 | 7.60 | 4.90 | 6.50 |
| 34 | 8.30 | 5.60 | 7.20 |
| 40 | 9.35 | 6.65 | 8.25 |
| 44 | 10.05 | 7.35 | 8.95 |
| 50 | 11.10 | 8.40 | 10.00 |
| 54 | 11.80 | 9.10 | 10.70 |
| 60 | 12.85 | 10.15 | 11.75 |
| 64 | 13.55 | 10.85 | 12.45 |
| 70 | 14.60 | 11.90 | 13.50 |
| 80 | 16.35 | 13.65 | 15.25 |
| 100 | 19.85 | 17.15 | 18.75 |


Dimension table (mm)

| Number of pins/ dimension | A | B | C |
|---------------------------|-------|-------|-------|
| 10 | 3.40 | 1.40 | 2.80 |
| 12 | 3.75 | 1.75 | 3.15 |
| 16 | 4.45 | 2.45 | 3.85 |
| 20 | 5.15 | 3.15 | 4.55 |
| 24 | 5.85 | 3.85 | 5.25 |
| 30 | 6.90 | 4.90 | 6.30 |
| 34 | 7.60 | 5.60 | 7.00 |
| 40 | 8.65 | 6.65 | 8.05 |
| 44 | 9.35 | 7.35 | 8.75 |
| 50 | 10.40 | 8.40 | 9.80 |
| 54 | 11.10 | 9.10 | 10.50 |
| 60 | 12.15 | 10.15 | 11.55 |
| 64 | 12.85 | 10.85 | 12.25 |
| 70 | 13.90 | 11.90 | 13.30 |
| 80 | 15.65 | 13.65 | 15.05 |
| 100 | 19.15 | 17.15 | 18.55 |

EMBOSSED TAPE DIMENSIONS (Unit: mm)


• Specifications for taping

(In accordance with JIS C 0806-3:1999. However, not applied to the mounting-hole pitch of some connectors.)

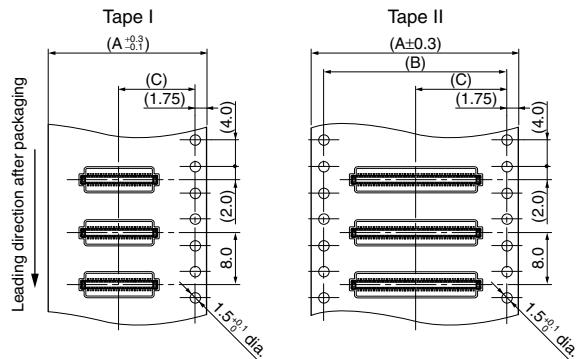

• Specifications for the plastic reel

(In accordance with EIAJ ET-7200B.)

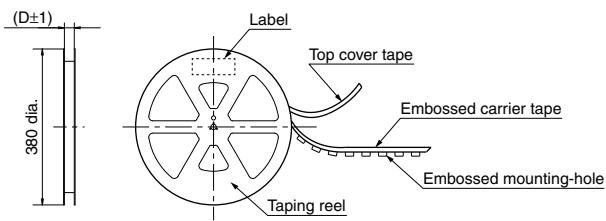

• Dimension table (Unit: mm)


| Type/Mated height | Number of pins | Type of taping | A | B | C | D | Quantity per reel |
|--------------------------------|----------------|----------------|------|------|------|------|-------------------|
| Common for sockets and headers | 10 to 24 | Tape I | 16.0 | — | 7.5 | 17.4 | 5,000 |
| | 30 to 80 | Tape I | 24.0 | — | 11.5 | 25.4 | 5,000 |
| | 100 | Tape II | 32.0 | 28.4 | 14.2 | 33.4 | 5,000 |

• Connector orientation with respect to embossed tape feeding direction

| Type Direction of tape progress | Common for A35S | |
|---------------------------------------|-----------------|--------|
| | Socket | Header |

Note: There is no indication on this product regarding top-bottom or left-right orientation.

| | | |
|------------------|---|-------------|
| For board-to-FPC | Connectors for inspection usage (0.35mm pitch) | A35S |
| | | |

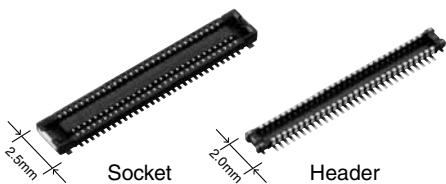

FEATURES

1. **3,000 mating and unmating cycles**
2. **Same external dimensions and foot pattern as standard type.**
3. **Improved mating**
Insertion and removal easy due to a reduction in mating retention force. This is made possible by a simple locking structure design.

APPLICATIONS

Ideal for module unit inspection and equipment assembly inspection
Note: Mating retention force cannot be warranted.
Please avoid using for applications other than inspection.

RoHS compliant

TABLE OF PRODUCT TYPES

☆: Available for sale

| Product name | Number of pins | | | | | | | | | | | | | | | |
|------------------------|----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|
| | 10 | 12 | 16 | 20 | 24 | 30 | 34 | 40 | 44 | 50 | 54 | 60 | 64 | 70 | 80 | 100 |
| A35S for inspection | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ |

Notes: 1. Please inquire about number of pins other than those shown above.

2. Please inquire with us regarding availability.
3. Please keep the minimum order quantities no less than 50 pieces per lot.
4. Please inquire if further information is needed.

PRODUCT TYPES

| Specifications | | Part No. | Specifications | | Part No. |
|----------------|----------------------------|-----------|----------------|----------------------------|-----------|
| Socket | Without positioning bosses | AXE7E**26 | Header | Without positioning bosses | AXE8E**26 |

Note: When placing an order, substitute the "*" (asterisk) in the above part number with the number of pins for the specific connector.

NOTES

■ Design of PC board patterns

Conduct the recommended foot pattern design, in order to preserve the mechanical strength of terminal solder areas.


■ Recommended PC board and metal mask patterns

Connectors are mounted with high pitch density, intervals of 0.35 mm, 0.4 mm or 0.5 mm.

In order to reduce solder and flux rise, solder bridges and other issues make sure the proper levels of solder is used. The figures to the right are recommended metal mask patterns. Please use them as a reference.


• Socket (Mated height: 0.8 mm)

Recommended PC board pattern (TOP VIEW)

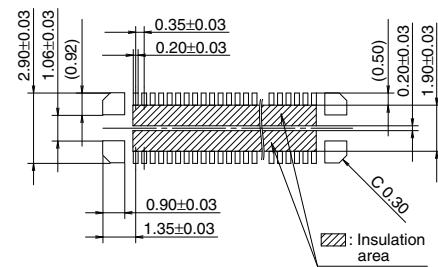


• Header (Mated height: 0.8 mm)

Recommended PC board pattern (TOP VIEW)

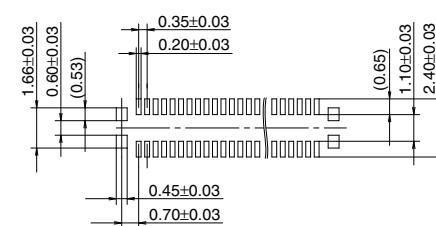


Recommended metal mask pattern

Metal mask thickness: When 120 μ m
(Terminal opening ratio: 70%)
(Metal-part opening ratio: 70%)

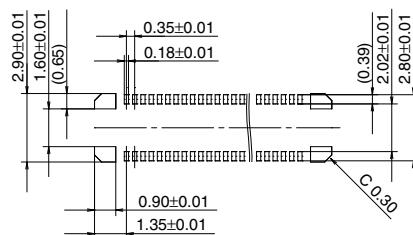

Recommended metal mask pattern

Metal mask thickness: When 120 μ m
(Terminal opening ratio: 70%)
(Metal-part opening ratio: 100%)

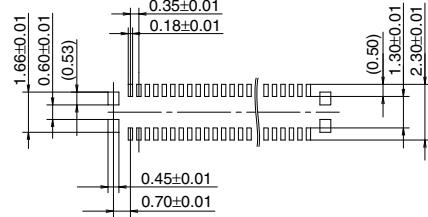

Please refer to the latest product specifications when designing your product.

Notes on Using Narrow pitch Connectors/ High Current Connectors

About safety Remarks

- 1) Do not use these connectors beyond the specification sheets. The usage outside of specified rated current, dielectric strength, and environmental conditions and so on may cause circuitry damage via abnormal heating, smoke, and fire.
- 2) In order to avoid accidents, your thorough specification review is appreciated.

Please contact us if your usage is out of the specifications. Otherwise, Panasonic

Corporation cannot guarantee the quality and reliability.
3) Panasonic Corporation is consistently striving to improve quality and reliability. However, the fact remains that electrical components and devices generally cause failures at a given statistical probability. Furthermore, their durability varies with use environments or use conditions. In this respect, please check for actual electrical components and devices under actual conditions before use.

Continued usage in a state of degraded condition may cause the deteriorated insulation, thus result in abnormal heat, smoke or firing. Please carry out safety design and periodic maintenance including redundancy design, design for fire spread prevention, and design for malfunction prevention so that no accidents resulting in injury or death, fire accidents, or social damage will be caused as a result of failure of the products or ending life of the products.


Regarding the design of devices and PC board patterns

- 1) When using the board to board connectors, do not connect a pair of board with multiple connectors. Otherwise, misaligned connector positions may cause mating failure or product breakage.
- 2) With mounting equipment, there may be up to a ± 0.2 to 0.3 -mm error in positioning. Be sure to design PC boards and patterns while taking into consideration the performance and abilities of the required equipment.
- 3) Some connectors have tabs embossed on the body to aid in positioning. When using these connectors, make sure that the PC board is designed with positioning holes to match these tabs.
- 4) To ensure the required mechanical strength when soldering the connector terminals, make sure the PC board meets recommended PC board pattern design dimensions given.
- 5) PC board
Control the thicknesses of the overlay and adhesive to prevent poor soldering. This connector has no stand-off.

Therefore, minimize the thickness of the overlay, etc. so as to prevent the occurrence of poor soldering.

- 6) For all connectors of the narrow pitch series, to prevent the PC board from coming off during vibrations or impacts, and to prevent loads from falling directly on the soldered portions, be sure to design some means to fix the PC board in place.

Example) Secure in place with screws

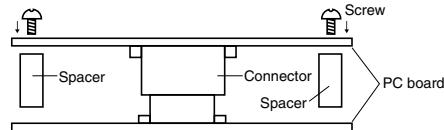

When connecting PC boards, take appropriate measures to prevent the connector from coming off.

- 7) When mounting connectors on a FPC board:
 - When the connector soldered to FPC is mated or unmated, solder detachment may occur by the force to the terminals. Connector handling is recommended in

the condition when the reinforcing plate is attached to the backside of FPC where the connector is mounted. The external dimension of the reinforcing plate is recommended to be larger than the dimension of "PC board recommended process pattern" (extended dimension of one side is approximately 0.5 to 1.0 mm). The materials and thickness of the reinforcing plate are glass epoxy or polyimide (thickness 0.2 - 0.3 mm) or SUS (thickness 0.1 - 0.2 mm).

- As this connector has temporary locking structure, the connector mating may be separated by the dropping impact depend on the size, weight or bending force of the FPC. Please consider the measures at usage to prevent the mating separation.

- 8) The narrow pitch connector series is designed to be compact and thin. Although ease of handling has been taken into account, take care when mating the connectors, as displacement or angled mating could damage or deform the connector.

Regarding the selection of the connector placement machine and the mounting procedures

- 1) Select the placement machine taking into consideration the connector height, required positioning accuracy, and packaging conditions.
- 2) Be aware that if the chucking force of the placement machine is too great, it may deform the shape of the connector body or connector terminals.
- 3) Be aware that during mounting, external forces may be applied to the connector contact surfaces and terminals and cause deformations.

- 4) Depending on the size of the connector being used, self alignment may not be possible. In such cases, be sure to carefully position the terminal with the PC board pattern.
- 5) The positioning bosses give an approximate alignment for positioning on the PC board. For accurate positioning of the connector when mounting it to the PC board, we recommend using an automatic positioning machine.

- 6) In case of dry condition, please note the occurrence of static electricity. The product may be adhered to the embossed carrier tape or the cover tape in dry condition. Recommended humidity is from 40%RH to 60%RH and please remove static electricity by ionizer in manufacturing process.

Regarding soldering

■ Reflow soldering


1) Measure the recommended profile temperature for reflow soldering by placing a sensor on the PC board near the connector surface or terminals.

(Please refer to the specification for detail because the temperature setting differs by products.)

2) As for cream solder printing, screen printing is recommended.

3) When setting the screen opening area and PC board foot pattern area, refer the recommended PC board pattern and window size of metal mask on the specification sheet, and make sure that the size of board pattern and metal mask at the base of the terminals are not increased.

4) Please pay attentions not to provide too much solder. It makes miss mating because of interference at soldering portion when mating.

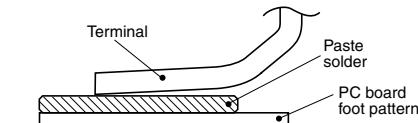

5) When mounting on both sides of the PC board and the connector is mounting on the underside, use adhesives or other means to ensure the connector is properly fixed to the PC board. (Double reflow soldering on the same side is possible.)

6) The condition of solder or flux rise and wettability varies depending on the type of solder and flux. Solder and flux characteristics should be taken into consideration and also set the reflow temperature and oxygen level.

7) Do not use resin-containing solder. Otherwise, the contacts might be firmly fixed.

Handling Single Components


1) Make sure not to drop or allow parts to fall from work bench.

2) Excessive force applied to the terminals could cause warping, come out, or weaken the adhesive strength of the solder. Handle with care.


Precautions for mating

This product is designed with ease of handling. However, in order to prevent the deformation or damage of contacts and molding, take care and do not mate the connectors as shown right.

3) Do not insert or remove the connector when it is not soldered. Forcibly applied external pressure on the terminals can weaken the adherence of the terminals to the molded part or cause the terminals to lose their evenness.

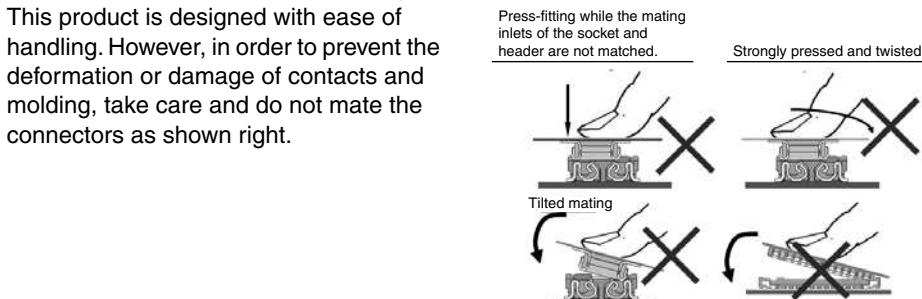

8) Soldering conditions
Please use the reflow temperature profile conditions recommended below for reflow soldering. Please contact us before using a temperature profile other than that described below (e.g. lead-free solder).

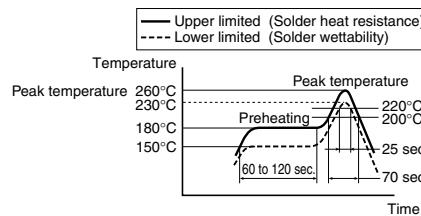

For products other than the ones above, please refer to the latest product specifications.

9) The temperature profiles given in this catalog are values measured when using the connector on a resin-based PC board. When performed reflow soldering on a metal board (iron, aluminum, etc.) or a metal table to mount on a FPC, make sure there is no deformation or discoloration of the connector before mounting.

10) Consult us when using a screen-printing thickness other than that recommended.

■ Hand soldering


1) Set the soldering iron so that the tip temperature is less than that given in the table below.

Table A

| Product name | Soldering iron temperature |
|---------------------|--|
| SMD type connectors | 300°C within 5 sec. 350°C within 3 sec. |

2) Do not allow flux to spread onto the connector leads or PC board. This may lead to flux rising up to the connector inside.

3) Touch the soldering iron to the foot pattern. After the foot pattern and connector terminal are heated, apply the solder wire so it melts at the end of the connector terminals.

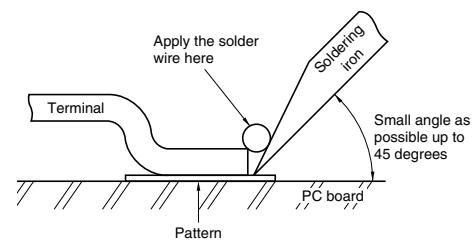

4) Be aware that soldering while applying a load on the connector terminals may cause improper operation of the connector.

5) Thoroughly clean the soldering iron.

6) Flux from the solder wire may get on the contact surfaces during soldering operations. After soldering, carefully check the contact surfaces and clean off any solder before use.

7) These connector is low profile type. If too much solder is supplied for hand soldering, It makes miss mating because of interference at soldering portion. Please pay attentions.

■ Solder reworking

1) Finish reworking in one operation.

2) In case of soldering rework of bridges. Don't use supplementary solder flux. Doing so may cause contact problems by flux.

3) Keep the soldering iron tip temperature below the temperature given in Table A.

Cleaning flux from PC board

There is no need to clean this product. If cleaning it, pay attention to the following points to prevent the negative effect to the product.


1) Keep the cleaning solvent clean and prevent the connector contacts from contamination.

2) Some cleaning solvents are strong and they may dissolve the molded part and characters, so pure water passed liquid solvent is recommended.

Handling the PC board after mounting the connector

When cutting or bending the PC board after mounting the connector, be careful that the soldered sections are subjected to excessive force.

The soldered areas should not be subjected to force.



Storage of connectors

- 1) To prevent problems from voids or air pockets due to heat of reflow soldering, avoid storing the connectors in areas of high humidity.
- 2) Depending on the connector type, the color of the connector may vary from connector to connector depending on when it is produced.

Some connectors may change color slightly if subjected to ultraviolet rays during storage. This is normal and will not affect the operation of the connector.

3) When storing the connectors with the PC boards assembled and components already set, be careful not to stack them up so the connectors are subjected to

excessive forces.

4) Avoid storing the connectors in locations with excessive dust. The dust may accumulate and cause improper connections at the contact surfaces.

Other Notes

- 1) Do not remove or insert the electrified connector (in the state of carrying current or applying voltage).
- 2) Dropping of the products or rough mishandling may bend or damage the terminals and possibly hinder proper reflow soldering.
- 3) Before soldering, try not to insert or remove the connector more than absolutely necessary.


- 4) When coating the PC board after soldering the connector to prevent the deterioration of insulation, perform the coating in such a way so that the coating does not get on the connector.
- 5) There may be variations in the colors of products from different production lots. This is normal.
- 6) The connectors are not meant to be used for switching.

- 7) Product failures due to condensation are not covered by warranty.

Regarding sample orders to confirm proper mounting


When ordering samples to confirm proper mounting with the placement machine, connectors are delivered in 50-piece units in the condition given right. Consult a sale representative for ordering sample units.

Condition when delivered from manufacturing



Embossed tape
amount required for
the mounting

Required number
of products for
sample production
(Unit 50 pcs.)



(Delivery can also be made on a reel by customer request.)

Please refer to the latest product specifications when designing your product.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic[®]

©Panasonic Corporation 2016