



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NOTES:

1. MATERIALS AND FINISHES:  
RETAINING RING, WASHER, CAP,  
REAR BODY & BAYONET SLEEVE - BRASS, NICKEL PLATING  
OUTER CONTACT - BeCu, NICKEL PLATING  
CONTACT - PHOSPHOR BRONZE, GOLD PLATING  
FERRULE - COPPER, NICKEL PLATING  
INSULATOR - PTFE, NATURAL  
GASKET - FLUOROSILICONE, BLACK  
SPRING - STAINLESS STEEL, PASSIVATED
2. ELECTRICAL:  
A. IMPEDANCE: 75 OHM  
B. FREQUENCY RANGE: DC - 4 GHz  
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.  
D. INSULATION RESISTANCE: 10,000 MΩ MIN
3. MECHANICAL:  
A. DURABILITY: 500 CYCLES MIN.  
B. TEMPERATURE RANGE: -65° C TO +165° C
4. ENVIRONMENTAL:  
A. THERMAL SHOCK PER MIL-STD-202 METHOD 107  
TEST CONDITION B (EXCEPT HIGH TEMP @200°C)  
B. VIBRATION: MIL-STD-202 METHOD 204 TEST CONDITION B  
C. SHOCK: MIL-STD-202 METHOD 213 TEST CONDITION B  
D. CORROSION: MIL-STD-202 METHOD 101  
TEST CONDITION B 5% SALT SOLUTION
5. PACKAGING:  
A. QUANTITY: SINGLE PACK  
B. MARKING: BAG TO BE MARKED:  
"AMPHENOL RF, 34-1061 DATE CODE  
U.S. PATENT NO. 7,553,177"
6. HIGH DENSITY INSTALLATION/REMOVAL TOOL: 227-T2000
7. CABLE ASSEMBLY INSTRUCTIONS:  
A. TRIM CABLE AS SHOWN.  
B. SOLDER CONTACT TO CABLE CENTER CONDUCTOR  
C. CRIMP FERRULE WITH 0.128" HEX.  
D. PRESS CAP FLUSH

8> SHOWS CABLE ENTRY DIMENSIONS.


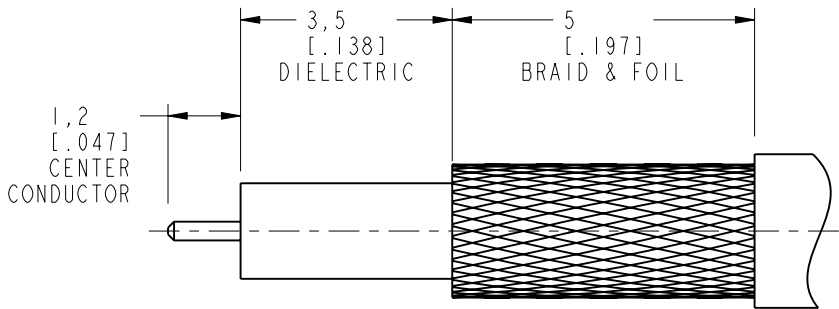


RECOMMENDED CABLE STRIPPING DIMENSIONS

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	18-Aug-17	04702	SS

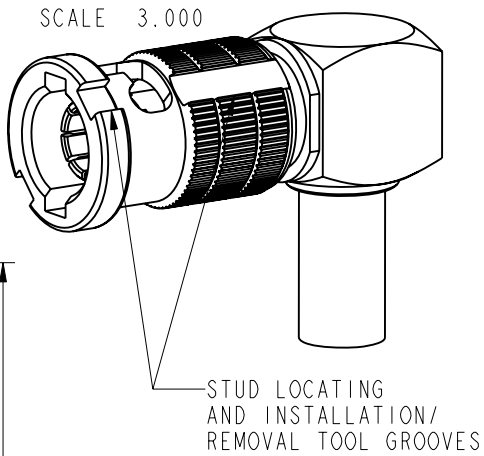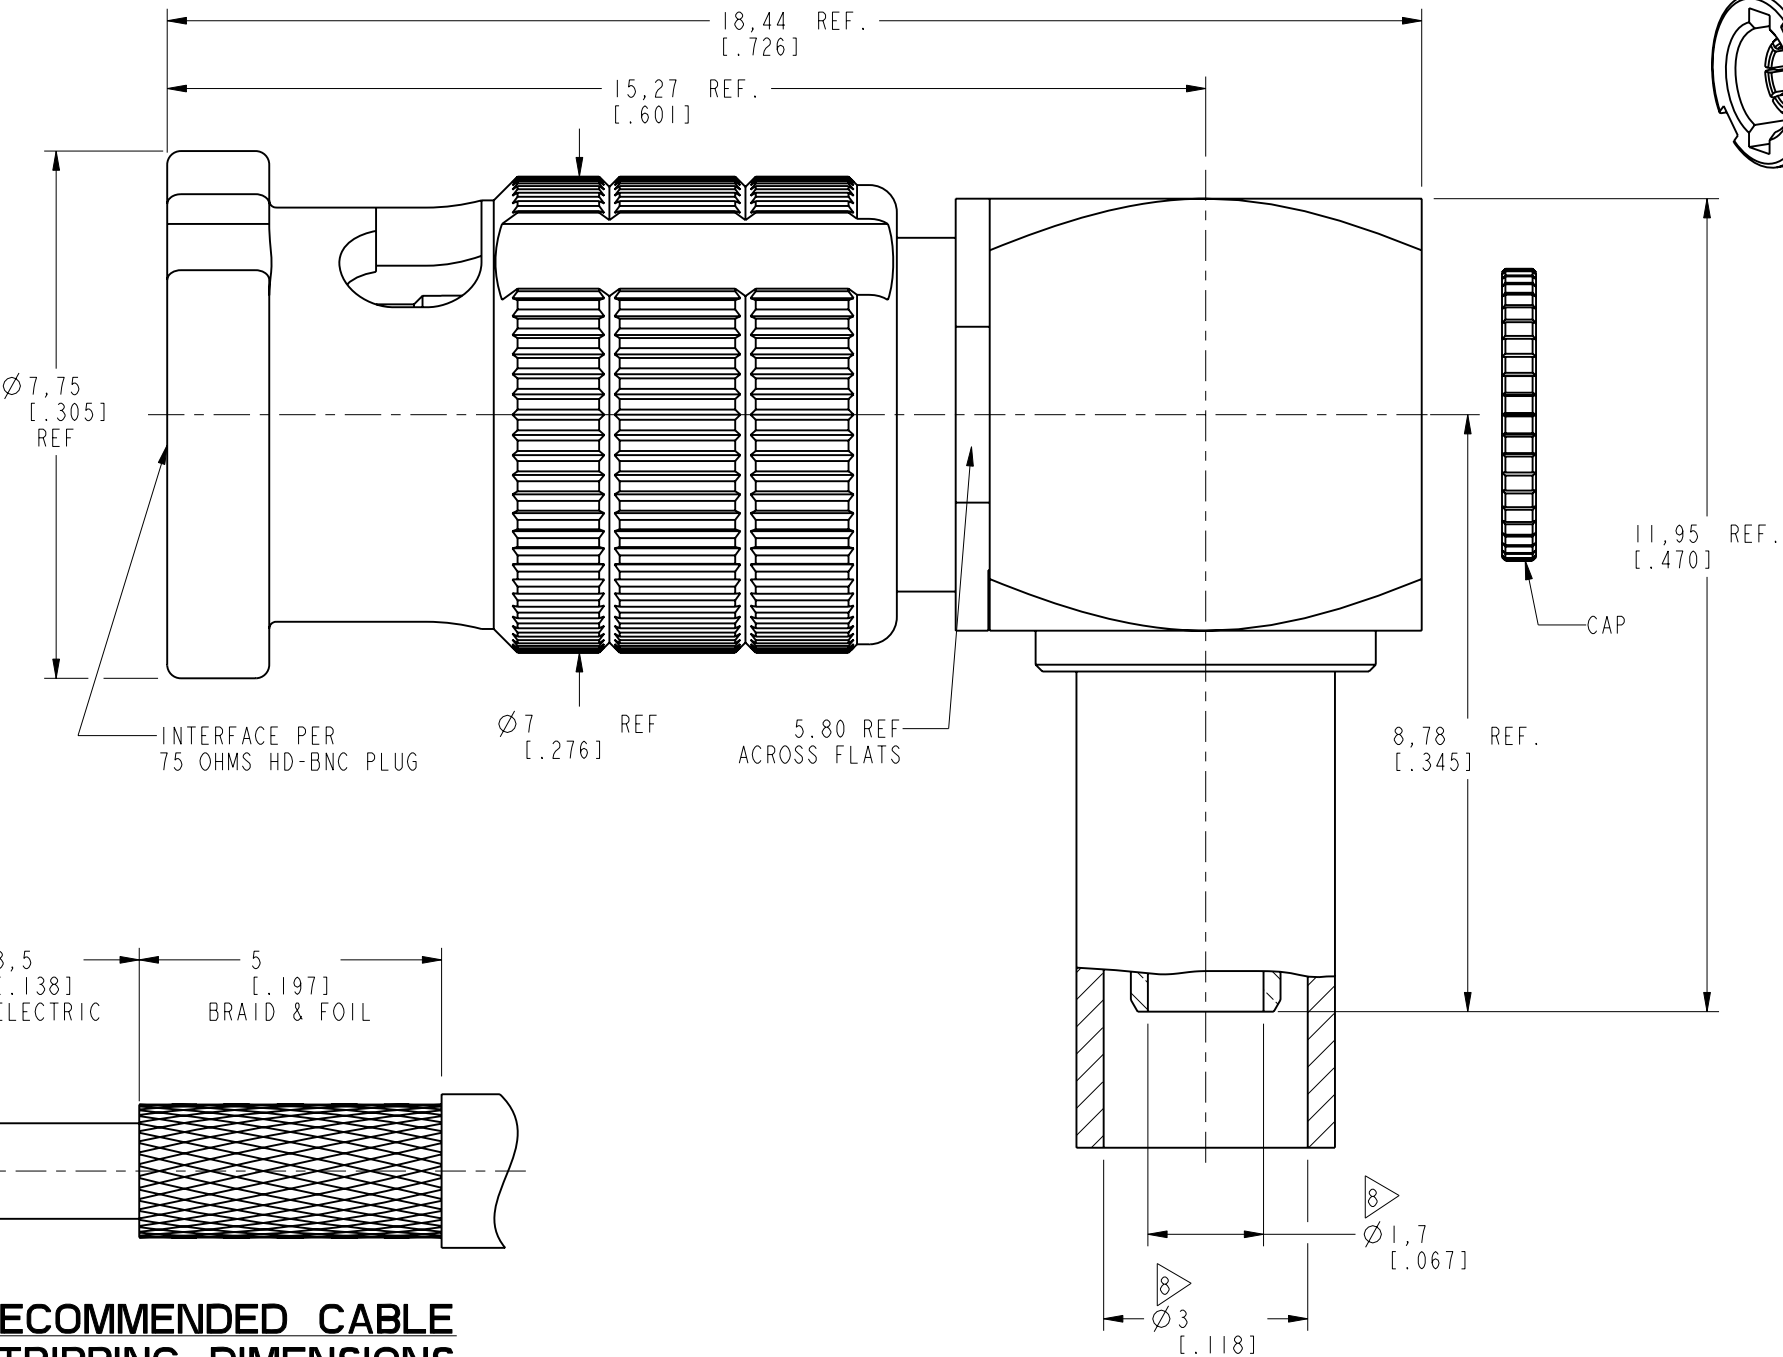

PROTECTED UNDER U.S. PATENT # 7,553,177

CUSTOMER OUTLINE DRAWING  
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm    0.5 - 6mm ± 0.1mm    6 - 30mm ± 0.2mm    30 - 120mm ± 0.3mm    ANGLES ± 1°  NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL  SEE NOTES	DRAWN R. MAO  ENGINEER MADHAN G	DATE 18-Aug-17  DATE 13-Aug-15	TITLE HD-BNC R/A PLUG FOR BELDEN 179DT/ RG 179 CABLE  SCALE: 9.0:1.0    SHEET 2 OF 2	Amphenol RF <a href="http://www.amphenolrf.com">www.amphenolrf.com</a>  DRAWING NO. 34-1061 ITEM NO. 34-1061 PART NO. 34-1061
	REFERENCE EAR #	APPROVED S. HSIEH	DATE 18-Aug-17		
	CONFIGURATION LEVEL: In Work	CAD FILE			
	FINISH				