



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## 345 Series Shock Safe Circuit Board Mount Enclosed Fuse Holders



### Dimensions

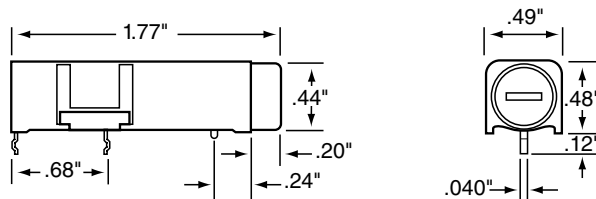

### Recommended hole Pattern

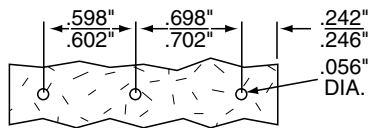

### Additional Information



Datasheet



Resources






Samples

### Product Characteristics

<b>Compatible Fuse Types</b>	<b>3AG 3AB 5x20mm</b>
<b>Description</b>	Similar to our Shock-Safe panel mount fuseholders, this series is designed per IEC Standards 60127-6. Two different knob styles available are available for use with 3AG and 3AB (1/4" x 1 1/4") or 5 x 20mm fuses.
<b>Electrical</b>	Insulation Resistance: 10,000 megohm minimum at 500 VDC. Contact Resistance: Less than .005 ohm average at a current of one ampere.
<b>Dielectric Strength</b>	4000 volts minimum. Mounting: Intended for soldering to printed circuit boards.
<b>Molded Parts</b>	Body Material: Black glass-filled thermoplastic (UL 94V0).
<b>Knob</b>	Screwdriver slot, fuse extractor type with nickel-plated, copper alloy insert. Spring-loaded, bayonet style. Knob Material: Grey or Black glass-filled thermoplastic (UL94 V-0)
<b>Terminals</b>	Brass. Tin-plated.
<b>Ambient Temperature</b>	-40°C to +85°C.

### Agency Approvals

Agency	Agency File Number
	E14721
	7316
	133923

\* Please refer to Fuseology section for information on proper fuseholder re-rating.

### Ordering Information

Catalog Number	Fuse Size
<b>345 101</b>	1/4" x 1 1/4" Fuses
<b>345 121</b>	5 x 20mm Fuses

Body only: 345 101-010

Knob only: 345 101-020 (1/4" x 1 1/4") Grey;

345 121-020 (5 x 20mm) Black.

## 345 Series Panel Mount Enclosed Fuse Holders



### Additional Information



Datasheet



Resources





Samples

### Product Characteristics

Compatible Fuses	For 3AB/3AG, 5x20mm Fuses
<b>Description</b>	Designed to eliminate the possibility of electrical shock, as defined in IEC standards 60127-6. The universal fuseholder body will accept 3AB, 3AG, and 5 x 20mm fuse sizes.
<b>Electrical</b>	Insulation Resistance: 10,000 megohm minimum at 500 VDC. Contact Resistance: Less than .005 ohm average at currents up to 1 ampere. Dielectric Strength: 4,000 volts minimum.
<b>Mounting</b>	Threaded styles withstand 15 in.-lb. mounting torque. Low profile and High profile panel thickness: .032" min./ .310" max.
<b>Molded Parts</b>	Body Material: Black glass-filled thermoplastic (UL 94V0).
<b>Knob Material</b>	Grey or black glass-filled thermoplastic (UL94 V-0) Hex Nut Material: Black glass-filled thermoplastic.
<b>Knob</b>	Fuse Extractor type with plated copper alloy insert. Plated copper alloy contact clips. Spring loaded, locking mechanism provides an anti-tease feature and will not vibrate loose.
<b>Terminals</b>	Plated copper alloy, A-187; dual purpose terminal accepts wire for soldering or a Quick-Connect receptacle.
<b>Ambient Temperature</b>	-40°C to +85°C.

\* Please refer to Fuseology section for information on proper fuseholder re-rating.


### Agency Approval

Agency	Agency File Number	3AG/AB	5x20mm
	E14721	20A, 600V	20A, 600V
	7316	20A, 600V	20A, 600V




**Dimensions**


**Low Profile Screwdriver Slot Knob**

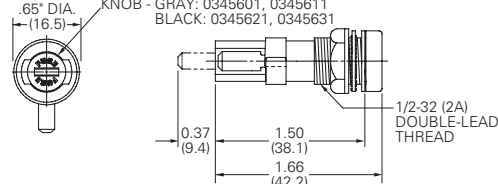


**High Profile Screwdriver Slot Knob**

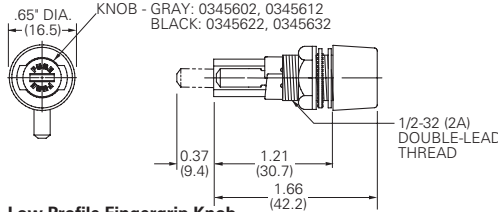


**Low Profile Fingergrip Knob**

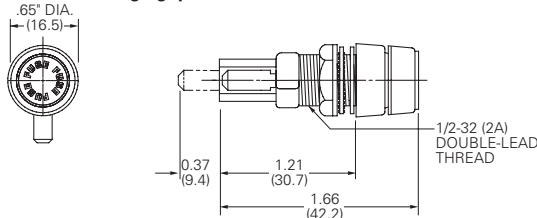


**Fast Mount Low Profile Screwdriver Slot Knob**

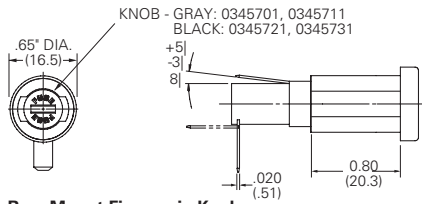


**Rear Mount Fingergrip Knob**

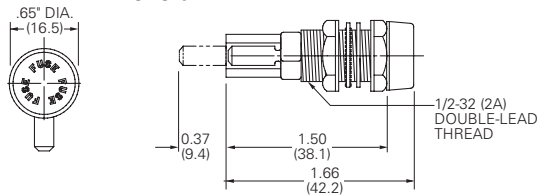


**Terminal Styles**




**Suggested Mounting Holes**




**Bottom Terminal**



**"Push-On" Type Retaining Nut for Quick Mount Fuseholder**



**Plastic Hex Nut with Flange**



**Part Numbering System**

Part Number		Knob Type	Low Profile	High Profile	Front Mount	Rear Mount	Rt. Angle Terminal	Straight Terminal	Packing
(3AG/AB)	5x20mm								
03450601H	03450621H	Screwdriver Slot	X		X		X		Bulk (100 pieces)
03450602H	03450622H	Screwdriver Slot		X	X		X		Bulk (100 pieces)
03450603H	03450623H	Finger Grip		X	X		X		Bulk (100 pieces)
03450611H	03450631H	Screwdriver Slot	X		X			X	Bulk (100 pieces)
03450612H	03450632H	Screwdriver Slot		X	X			X	Bulk (100 pieces)
03450613H	03450633H	Finger Grip		X	X			X	Bulk (100 pieces)
03450701H	-	Screwdriver Slot	X		X		X		Bulk (100 pieces)
03450711H	-	Screwdriver Slot	X		X			X	Bulk (100 pieces)
03450903H	03450923H	Finger Grip		X		X	X		Bulk (100 pieces)
03450913H	03450933H	Finger Grip		X		X		X	Bulk (100 pieces)