



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## 354 Series OMNI-BLOK® Molded Base Fuse Block for 3AB/3AG Fuses

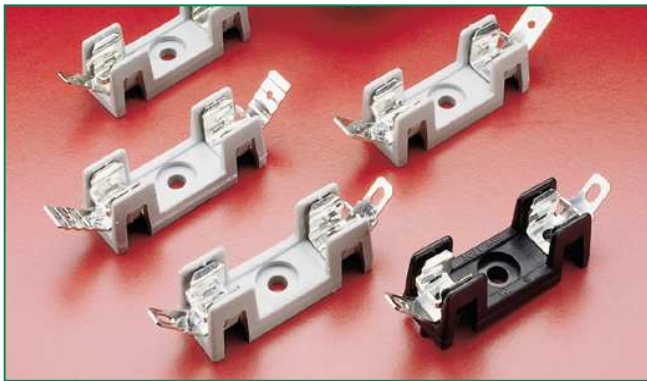

### Agency Approval

Agency	Agency File Number
	E14721
	7316

### Product & Mounting Dimensions

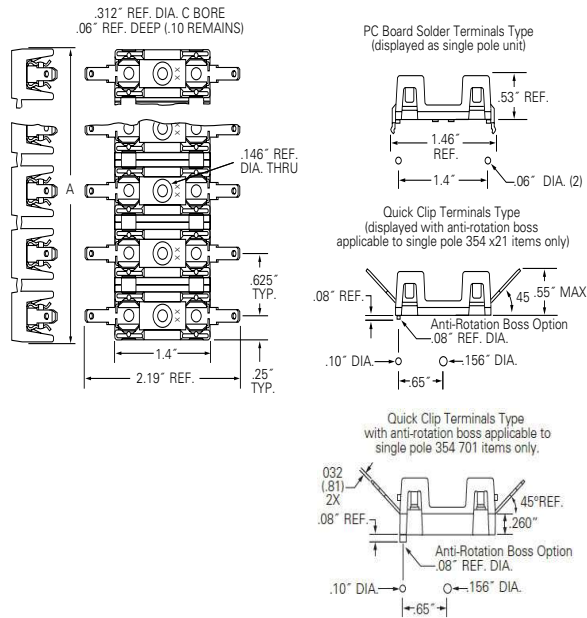

### Clip Detail



Note: Two different style clips can be supplied for circuit identity or polarization. Contact Littelfuse.

### Product Characteristics

Compatible Fuses Size	3AB/AG
<b>Description</b>	A low profile fuse block featuring individual barriers which reinforce the fuse clips while providing greater protection against clip damage and electrical shock. The unique design permits self-alignment of clips to fuse cap. This, plus a one-piece clip/terminal assures low contact resistance. Higher current ratings have been attained using spring brass clips. With the exception of the two-pole unit, multiple pole units may be broken apart to obtain desired number of poles
<b>Dielectric Strength</b>	1500V., Minimum
<b>Clip/Terminals</b>	Tin plated phosphorus bronze except for 354900 series which is tin plated spring brass.
<b>Base</b>	Glass reinforced Thermoplastic. UL 94V0 flammability rating. The standard base color is Gray except for 345 x21 items (single pole products which include anti-rotation boss option) where the standard base color is Black. Refer to the Ordering Information table on the following page for more information.
<b>Ambient Temperature</b>	-40°C to +85°C

### Electrical Information

Series or Catalog Number	Terminals	Rating
<b>354 000</b>	Solder	30A, 600 VDC/VAC*
<b>354 600</b>	3/16" Q.C.	20A, 600 VDC/VAC
<b>354 700</b>	1/4" Q.C. .032" Clip	30A, 600 VDC/VAC
<b>354 800</b>	1/4" Q.C.	20A, 600 VDC/VAC
<b>354 900</b>	1/4" Q.C.	30A, 600 VDC/VAC
<b>354 101-GY</b>	P.C. Board	15A, 600 VDC/VAC

\*30 amp capability is based on temperature rise with #10 AWG wire properly soldered.

### Additional Information



**Datasheet**



**Resources**



**Samples**

## Ordering Information

Solder Terminals	NEMA Style 3/16" Quick Clip Terminals	1/4" Quick Clip Terminals	NEMA Style 1/4" Quick Clip .032" Terminals	NEMA Style 1/4" Quick Clip Terminals	Number of Poles	Reference Dimension "A"
Ordering No.			Ordering No.			
03540101ZXGY	-	-	-	-	1	.50"
03540021ZXBL*	03540621ZXBL*	03540821ZXBL*	-	03540921ZXBL*	1	.50"
03540001ZXGY	03540601ZXGY	03540801ZXGY	03540701ZXGY	03540901ZXGY	1	.50"
03540002ZXGY	03540602ZXGY	03540802ZXGY	-	03540902ZXGY	2	1.12"
03540003ZXGY	03540603ZXGY	03540803ZXGY	-	03540903ZXGY	3	1.75"
03540004ZXGY	03540604ZXGY	03540804ZXGY	-	03540904ZXGY	4	2.38"
03540005ZXGY	03540605ZXGY	03540805ZXGY	-	03540905ZXGY	5	3.00"
03540006ZXGY	03540606ZXGY	03540806ZXGY	-	03540906ZXGY	6	3.63"
03540007ZXGY	03540607ZXGY	03540807ZXGY	-	03540907ZXGY	7	4.25"
03540008ZXGY	03540608ZXGY	03540808ZXGY	-	03540908ZXGY	8	4.88"
03540009ZXGY	03540609ZXGY	03540809ZXGY	-	03540909ZXGY	9	5.50"
03540010ZXGY	03540610ZXGY	03540810ZXGY	-	03540910ZXGY	10	6.13"
03540011ZXGY	03540611ZXGY	03540811ZXGY	-	03540911ZXGY	11	6.75"
03540012ZXGY	03540612ZXGY	03540812ZXGY	-	03540912ZXGY	12	7.38"

\* With Anti-Rotation Boss