



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


NPN Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1=10\text{k}\Omega$)
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

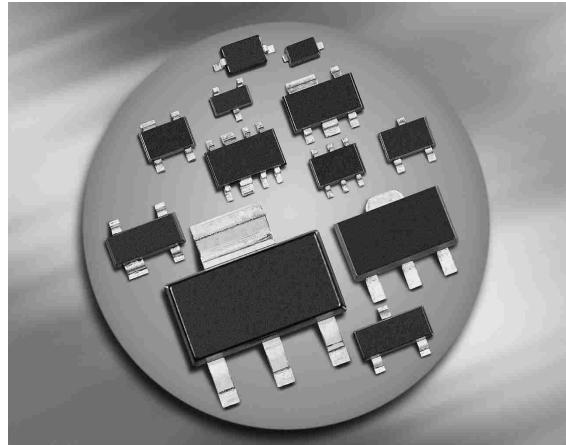


BCR129/F/L3
BCR129T/W

BCR129S
SEMH4



EH407364



EH407365

Type	Marking	Pin Configuration							Package
BCR129	WVs	1=B	2=E	3=C	-	-	-	-	SOT23
BCR129F	WVs	1=B	2=E	3=C	-	-	-	-	TSFP-3
BCR129L3	WV	1=B	2=E	3=C	-	-	-	-	TSLP-3-4
BCR129S	WVs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	-	SOT363
BCR129T	WVs	1=B	2=E	3=C	-	-	-	-	SC75
BCR129W	WVs	1=B	2=E	3=C	-	-	-	-	SOT323
SEMH4	WV	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	-	SOT666

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	5	
Input on voltage	$V_{i(on)}$	20	
Collector current	I_C	100	mA
Total power dissipation- BCR129, $T_S \leq 102^\circ\text{C}$ BCR129F, $T_S \leq 128^\circ\text{C}$ BCR129L3, $T_S \leq 135^\circ\text{C}$ BCR129S, $T_S \leq 115^\circ\text{C}$ BCR129T, $T_S \leq 109^\circ\text{C}$ BCR129W, $T_S \leq 124^\circ\text{C}$ SEMH4, $T_S \leq 75^\circ\text{C}$	P_{tot}	200 250 250 250 250 250 250	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BCR129 BCR129F BCR129L3 BCR129S BCR129T BCR129W SEMH4	R_{thJS}	≤ 240 ≤ 90 ≤ 60 ≤ 140 ≤ 165 ≤ 105 ≤ 300	K/W

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
DC current gain ¹⁾ $I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	h_{FE}	120	-	630	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(\text{off})}$	0.4	-	1	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(\text{on})}$	0.5	-	1.1	
Input resistor	R_1	7	10	13	k Ω

AC Characteristics


Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	150	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	3	-	pF

¹Pulse test: $t < 300\mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$
 $V_{CE} = 5 \text{ V}$ (common emitter configuration)

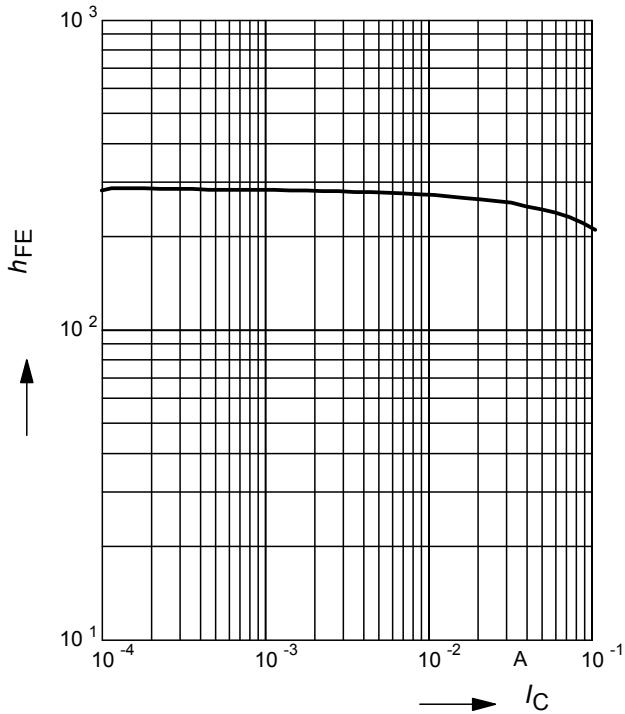


Input on Voltage $V_{i(on)} = f(I_C)$
 $V_{CE} = 0.3 \text{ V}$ (common emitter configuration)

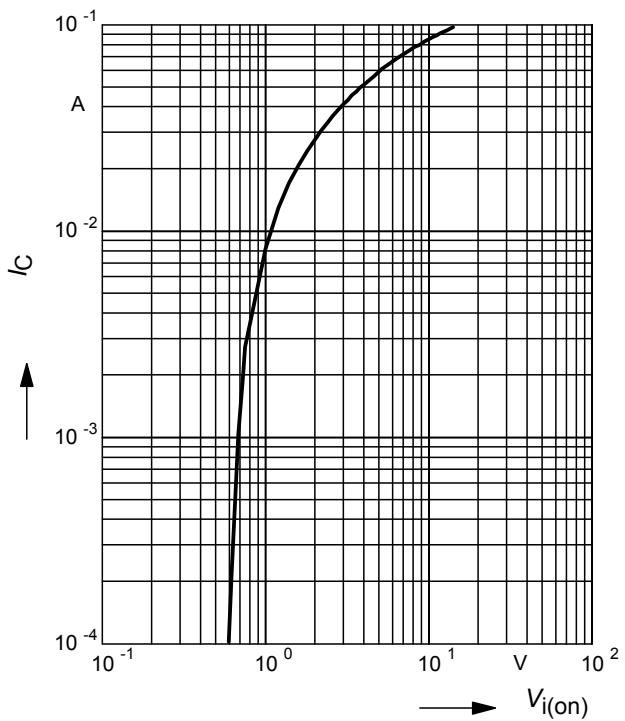


Collector-emitter saturation voltage
 $V_{CEsat} = f(I_C)$, $h_{FE} = 20$

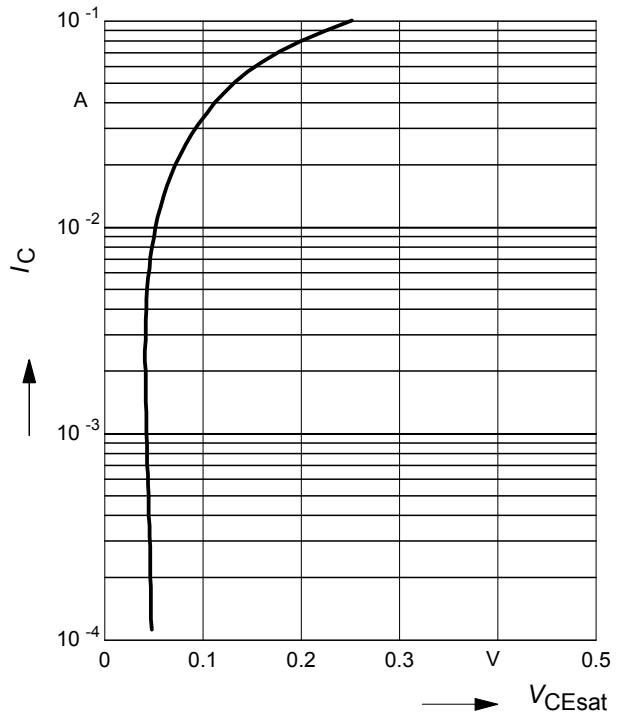

Input off voltage $V_{i(off)} = f(I_C)$
 $V_{CE} = 5 \text{ V}$ (common emitter configuration)

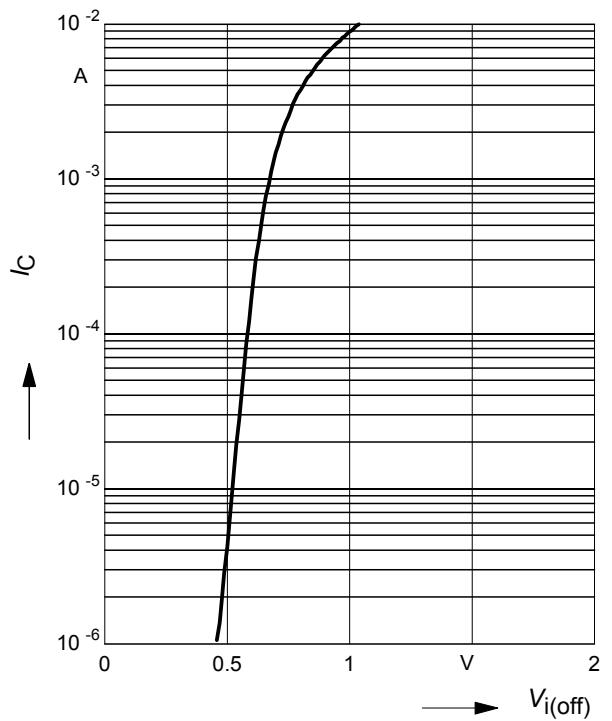


Total power dissipation $P_{\text{tot}} = f(T_S)$

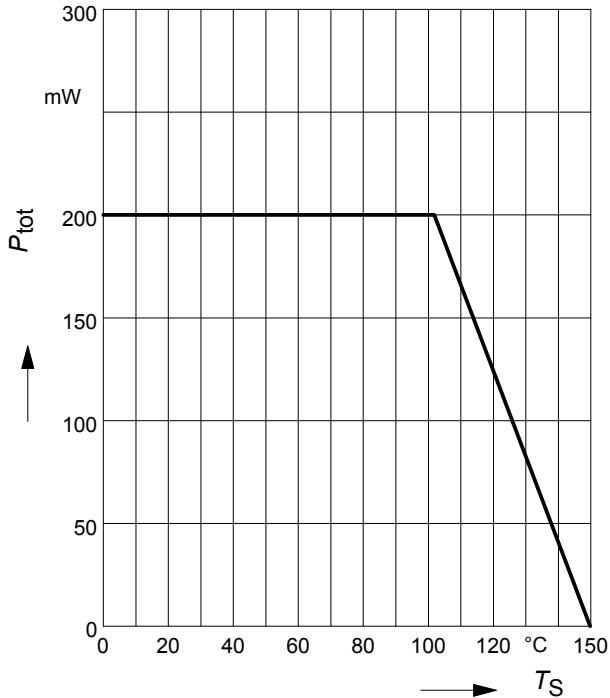


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129F

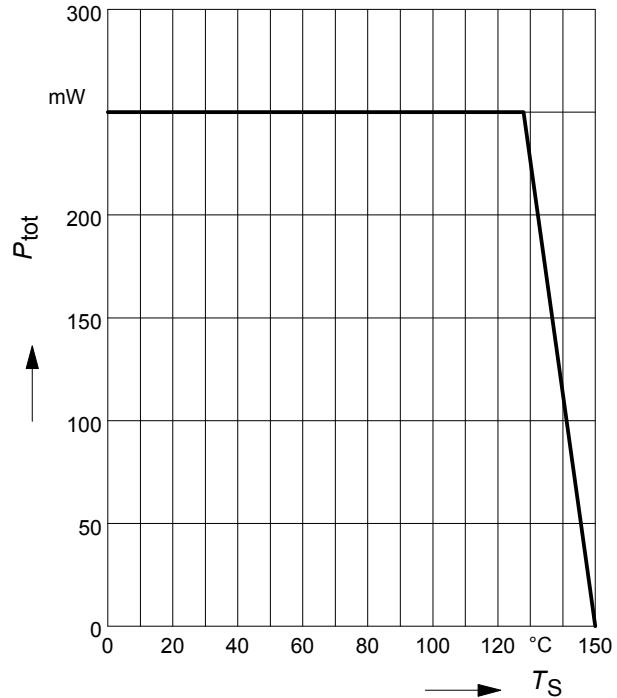


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129L3

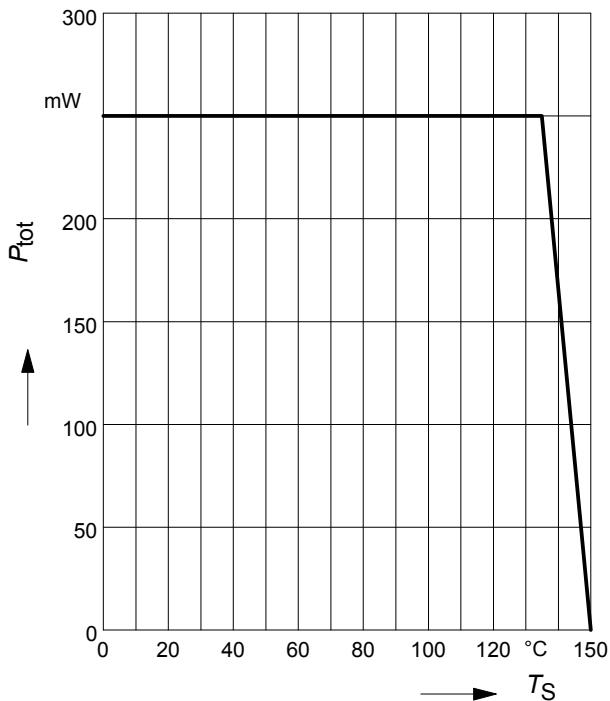


Total power dissipation $P_{\text{tot}} = f(T_S)$


BCR129S

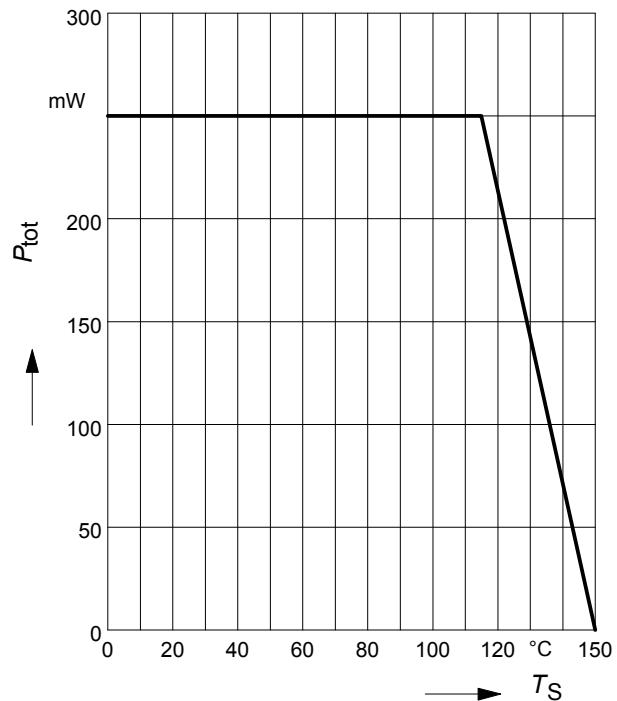


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR129T

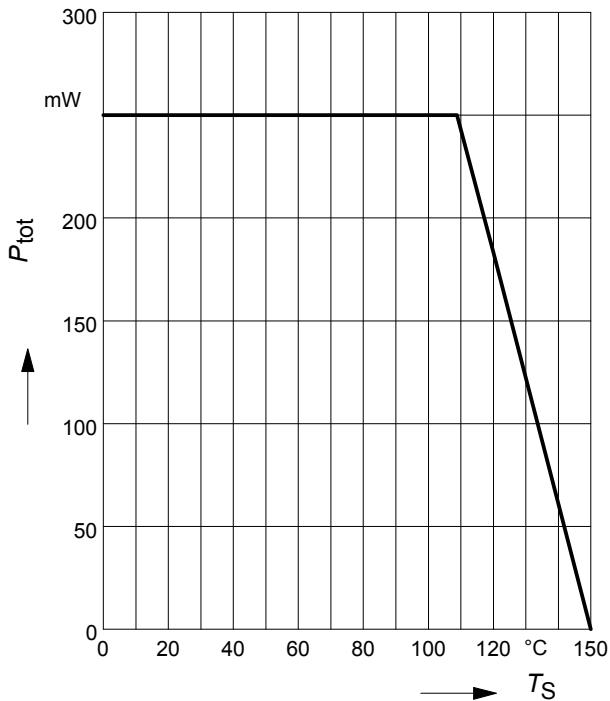

Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR129W

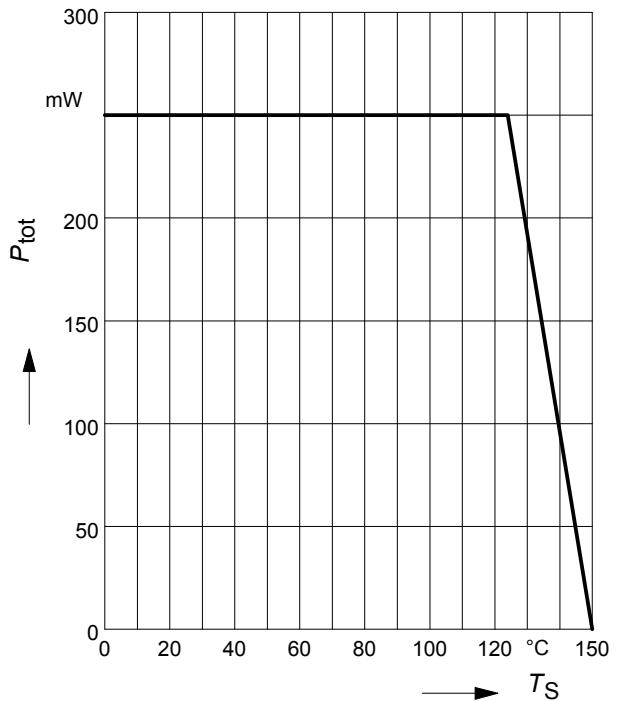


Total power dissipation $P_{\text{tot}} = f(T_S)$
SEMH4

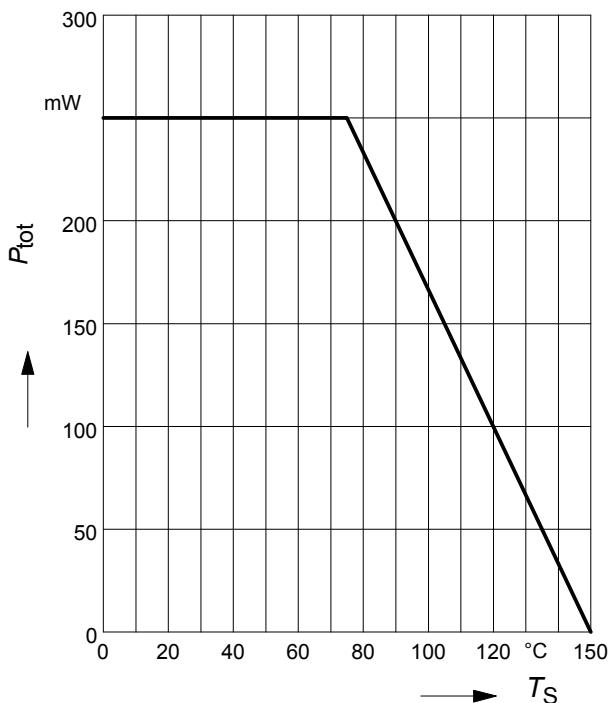


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

BCR129

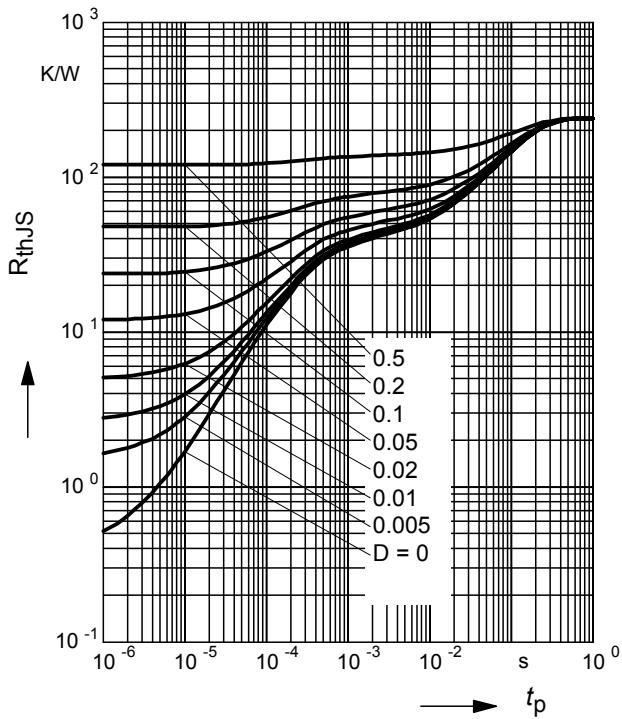

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR129F

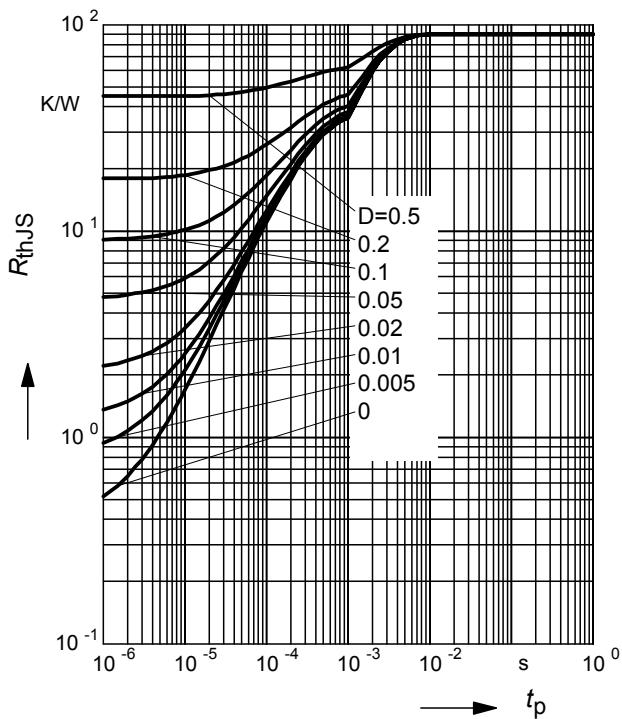

Permissible Pulse Load

$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$


BCR129

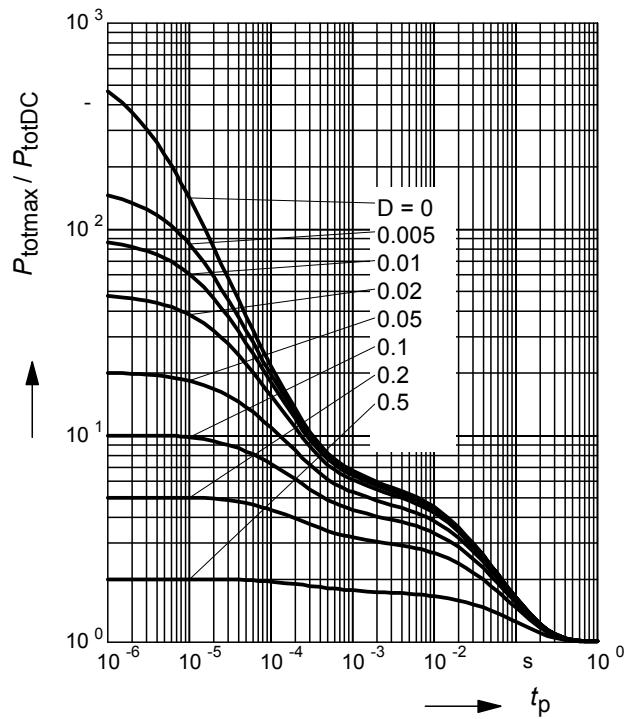

Permissible Pulse Load


$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

BCR129F

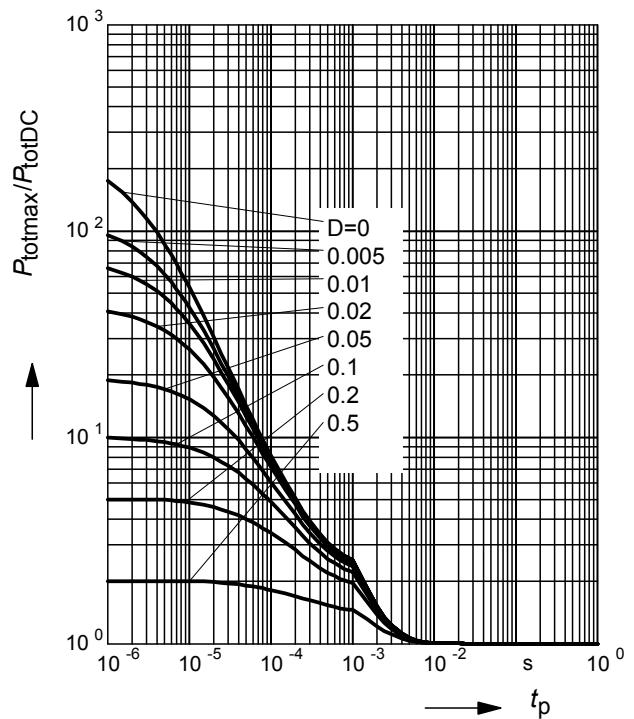


Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR129L3

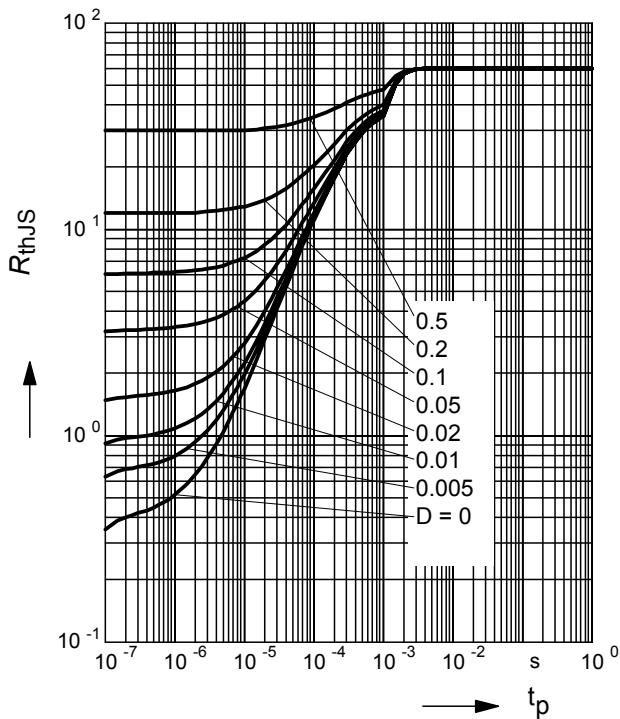

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR129S

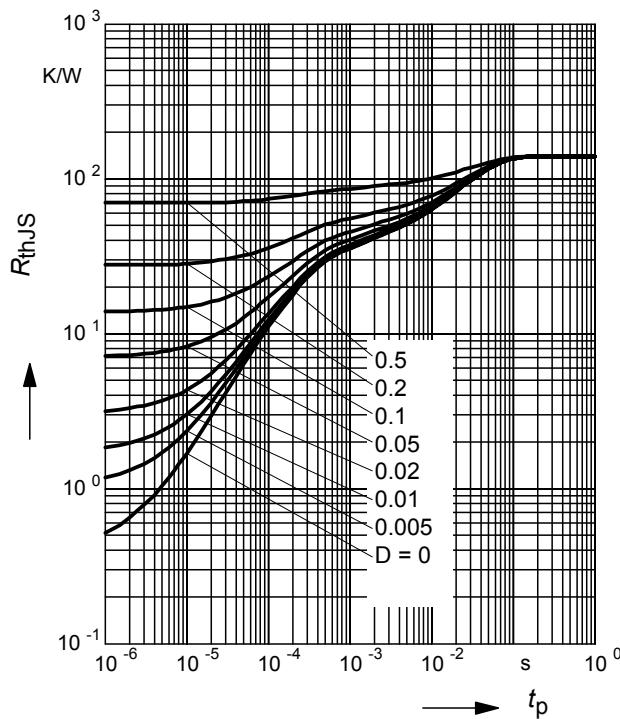

Permissible Pulse Load

$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$


BCR129L3

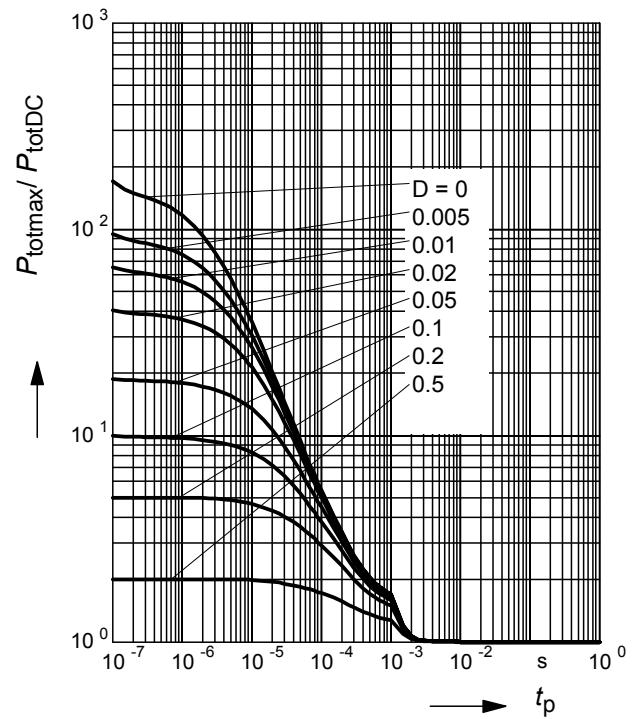

Permissible Pulse Load


$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

BCR129S

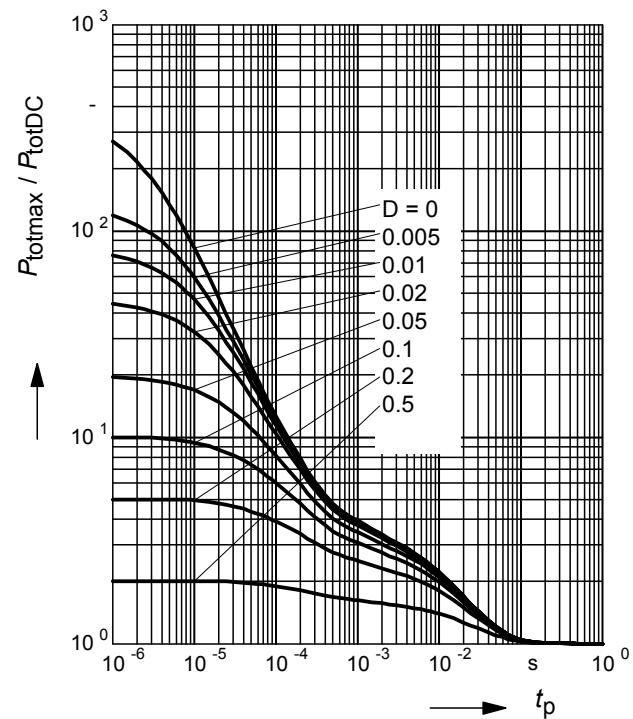


Permissible Puls Load $R_{thJS} = f(t_p)$

BCR129T

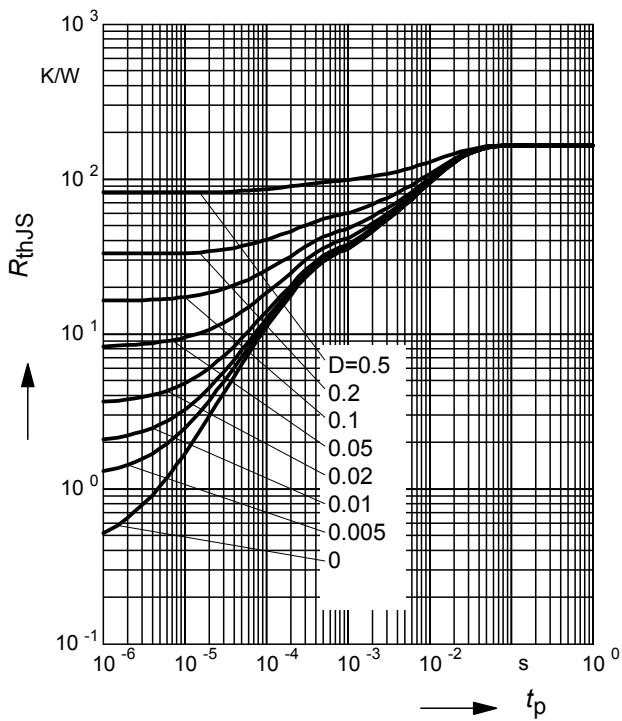

Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129T

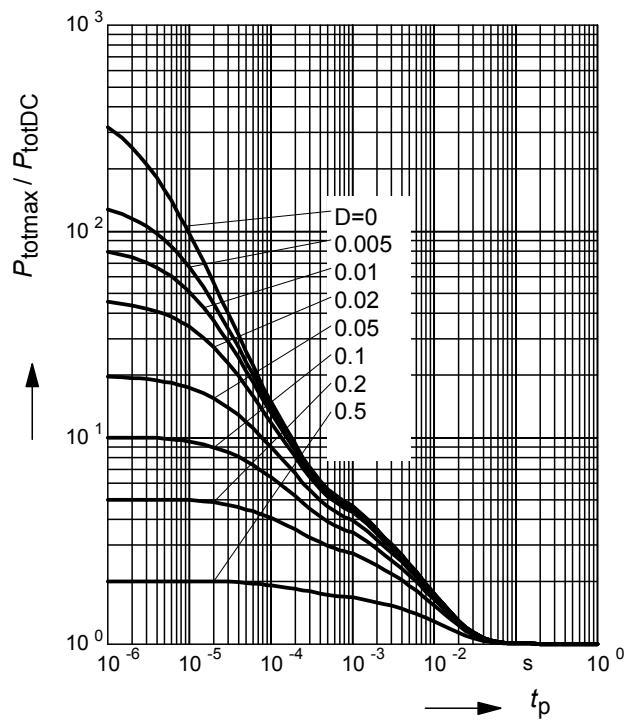

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR129W

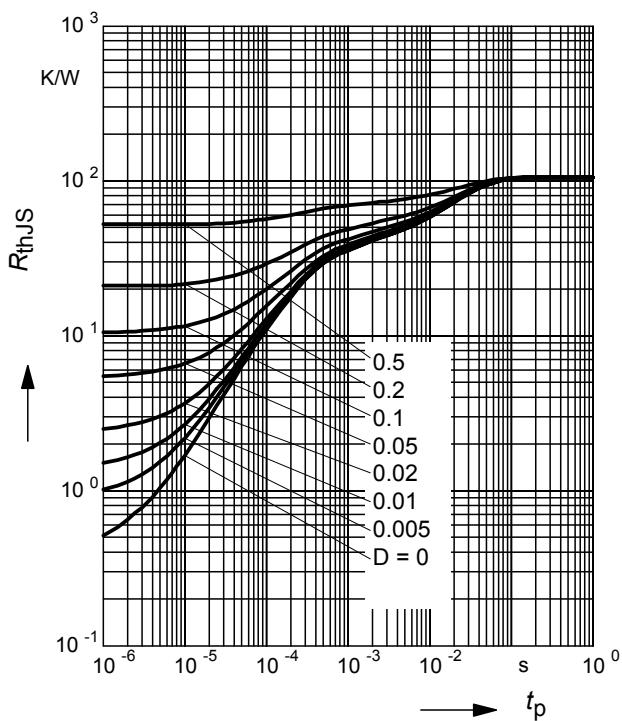

Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129W

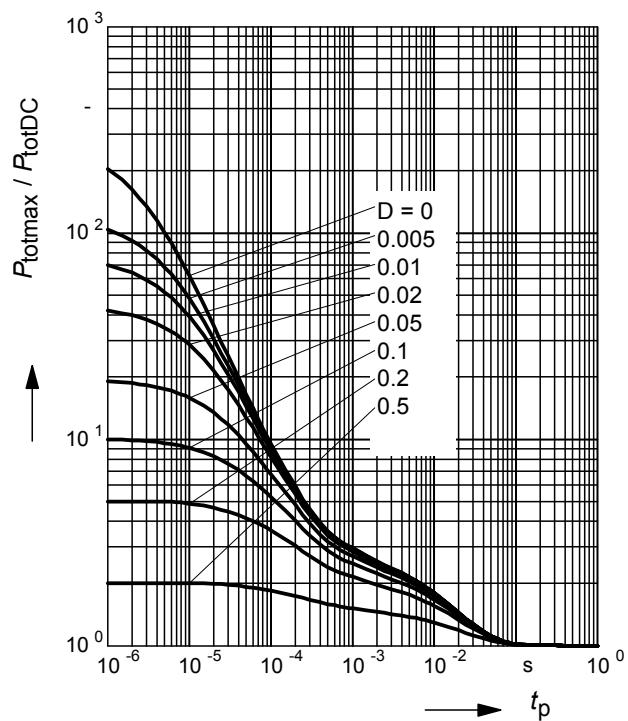

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$
SEMH4

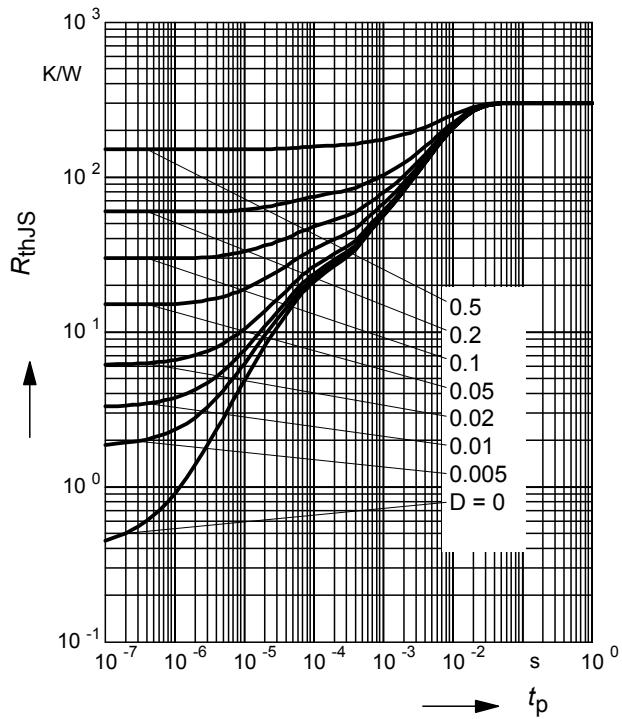

Permissible Pulse Load
 $P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$
SEMH4

