



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## DITTO™ INTERCONNECTS

### 1.0 SCOPE

This Product Specification covers the 2.5 mm (.098 inch) centerline (pitch) connector series terminated with 20 to 26 AWG wire using Crimp technology with Tin over Nickel plating.

### 2.0 PRODUCT DESCRIPTION

#### 2.1 PRODUCT NAME AND SERIES NUMBER(S)

DITTO GENDERLESS CRP TER HSM Cu 20-22AWG	36876
DITTO GENDERLESS CRP TER HSM Cu 24-26AWG	
DITTO GENDERLESS WTW HSG FRIC LOCK 1X2	36877
DITTO GENDERLESS WTW HSG FRIC LOCK 1X3	
DITTO GENDERLESS WTW HSG FRIC LOCK 1X4	
DITTO GENDERLESS WTW HSG FRIC LOCK 1X5	
DITTO GENDERLESS WTW HSG FRIC LOCK 1X6	
DITTO GENDERLESS WTW HSG FRIC LOCK 1X7	
DITTO GENDERLESS WTW HSG FRIC LOCK 1X8	
DITTO GENDERLESS HOUSING 1X2 TOOL REMOVAL VERSION	150171*
DITTO GENDERLESS HOUSING 1X3 TOOL REMOVAL VERSION	
DITTO GENDERLESS HOUSING 1X4 TOOL REMOVAL VERSION	
DITTO GENDERLESS HOUSING 1X5 TOOL REMOVAL VERSION	
DITTO GENDERLESS HOUSING 1X6 TOOL REMOVAL VERSION	
DITTO GENDERLESS HOUSING 1X7 TOOL REMOVAL VERSION	
DITTO GENDERLESS HOUSING 1X8 TOOL REMOVAL VERSION	

\*Under development

#### 2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

REFER SD-36877-001, SD-36876-001

REFER *SD-150171-0001 (TBE)*

#### 2.3 SAFETY AGENCY APPROVALS

UL FILE NUMBER: E29179

### 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

Application Tooling Specification Sheet 20-22 AWG: ATS-639030200

Application Tooling Specification Sheet 24-26 AWG: ATS-639030300

Unlatching Tooling Specification for Product Series 150171: *TBE*

Refer section 6.0 for Environmental Test Sequences

REVISION: <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE: <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No. <b>1 of 7</b>
DOCUMENT NUMBER: <b>PS-36876-001</b>	CREATED / REVISED BY: <b>NCSR</b>	CHECKED BY: <b>NCSR</b>	APPROVED BY: <b>KPRASAD</b>

## 4.0 RATINGS

### 4.1 VOLTAGE

350 Volts AC/DC

### 4.2 APPLICABLE WIRES

Refer Application Tooling Specification Sheets (see section 3.0) for details.

AWG	Insulation Diameter
20	1.35-1.70 mm (.053-.067 inch)
22	
24	1.05-1.50 mm (.041-.059 inch)
26	

### 4.3 CURRENT

Ratings shown below represent maximum current carrying capacity of a fully loaded connector with all circuits powered using UL1061 stranded wire. Ratings are based on a 30 °C maximum temperature rise limit over ambient (see section 5.1.4 for specification) without derating. Current is dependent on connector size, ambient temperature and related factors. Actual current rating is application dependent and should be evaluated for each use.

	2 CIRCUIT	3 CIRCUIT	4 CIRCUIT	5 CIRCUIT	6 CIRCUIT	7 CIRCUIT	8 CIRCUIT
<b>20 AWG</b>	8.0 A	8.0 A	6.3 A	6.3 A*	6.1 A	5.8 A*	5.6 A
<b>22 AWG</b>	6.4 A	6.3 A*	5.4 A*	5.6 A*	4.9 A*	4.8 A*	4.5 A*
<b>24 AWG</b>	5.3 A	5.1 A*	4.7 A*	4.4 A*	4.2 A*	4.0 A*	3.8 A*
<b>26 AWG</b>	4.4 A	4.1 A	4.1 A	4.0 A*	3.6 A	3.4 A*	3.2 A

\* Interpolated values

### 4.4 TEMPERATURE

Operating: - 40 °C to + 105 °C

REVISION: <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE: <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No. <b>2 of 7</b>
DOCUMENT NUMBER: <b>PS-36876-001</b>	CREATED / REVISED BY: <b>NCSR</b>	CHECKED BY: <b>NCSR</b>	APPROVED BY: <b>KPRASAD</b>

## 5.0 PERFORMANCE

### 5.1 ELECTRICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
5.1.1	<b>Contact Resistance (Low Level)</b>	Mate connectors: apply a maximum voltage of <b>20 mV</b> and a current of <b>100 mA</b> . EIA-364-23C	<b>3.5 milliohms</b> MAXIMUM [initial]
5.1.2	<b>Insulation Resistance</b>	Mate connectors: Apply a voltage of <b>500 VDC</b> between adjacent terminals and between terminals to ground. EIA-364-21C	<b>1000 Megohms</b> MINIMUM
5.1.3	<b>Dielectric Withstanding Voltage</b>	Apply a voltage of <b>1700 VAC</b> for <b>1 minute</b> between adjacent terminals and between terminals to ground. EIA-364-20D	No breakdown; current leakage < <b>5 mA</b>
5.1.4	<b>Temperature Rise</b>	Mate connectors: measure the temperature rise at the rated current. EIA-364-70, Method 2	Temperature rise: <b>+30°C MAXIMUM</b> (above ambient)

REVISION: <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE: <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No. <b>3 of 7</b>
DOCUMENT NUMBER: <b>PS-36876-001</b>	CREATED / REVISED BY: <b>NCSR</b>	CHECKED BY: <b>NCSR</b>	APPROVED BY: <b>KPRASAD</b>

## 5.2 MECHANICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
5.2.1 A	<b>Connector Mate and Unmate Forces</b> (Latch deactivated)  [For largest size - 8 Circuit connector]	Mate and unmate connector (male to female) at a rate of <b>25 ± 6 mm (1 ± ¼ inch)</b> per minute. EIA-364-13E	<b>27.0 N (6.06 lbf)</b> MAXIMUM Mate force  &  <b>7.0 N (1.6 lbf)</b> MINIMUM Unmate force
5.2.1 B	<b>Connector Mate and Unmate Forces</b> (Latch activated)  [For largest size - 8 Circuit connector]	Mate and unmate connector (male to female) at a rate of <b>25 ± 6 mm (1 ± ¼ inch)</b> per minute. EIA-364-13E	<b>27.0 N (6.06 lbf)</b> MAXIMUM Mate force  &  <b>9.9 N (2.2 lbf)</b> MINIMUM withdrawal force
5.2.2	<b>Terminal Retention Force (in Housing)</b>	Axial pullout force on the terminal in the housing at a rate of <b>25 ± 6 mm (1 ± ¼ inch)</b> per minute.	<b>30 N (6.74 lbf)</b> MINIMUM retention force
5.2.3	<b>Durability</b>	Mate and unmate connectors up to <b>5</b> cycles (to meet application requirement of up to 25 cycles over the life of the connector) at a maximum rate of <b>10</b> cycles per minute prior to Environmental Tests. EIA-364-09C	<b>10</b> milliohms MAXIMUM (change from initial)
5.2.4 A	<b>Vibration (Random)</b> Test Group 3	Mate connectors and vibrate per EIA 364-28, test condition VII. Letter D. (Acceleration 3.1 g)	<b>10</b> milliohms MAXIMUM (change from initial) & Discontinuity < <b>1</b> microsecond

REVISION:  <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE:  <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No.  <b>4 of 7</b>
DOCUMENT NUMBER:  <b>PS-36876-001</b>	CREATED / REVISED BY:  <b>NCSR</b>	CHECKED BY:  <b>NCSR</b>	APPROVED BY:  <b>KPRASAD</b>

## 5.2 MECHANICAL REQUIREMENTS (continued)

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT	
5.2.4 B	<b>Vibration (Sinusoidal)</b>	Mate connectors and vibrate per EIA 364-28, test condition II except where noted by *. Amplitude 1.52 mm Max. (10g peak), Frequency 50*-500 Hz in 6* minute(s) sweep for 20 hour(s) in each of the 3 mutually perpendicular axes.	<b>10 milliohms MAXIMUM</b> (change from initial)	
5.2.5 A	<b>Shock (Mechanical)</b> Test Group 3	Mate connectors and shock at <b>50 g's</b> with ½ sine wave (11 milliseconds) shocks in the ±X, ±Y, ±Z axes ( <b>18 shocks total</b> ). EIA-364-27, Test Condition A	<b>10 milliohms MAXIMUM</b> (change from initial]) & Discontinuity < <b>1 microsecond</b>	
5.2.5 B	<b>Shock (Mechanical)</b>	EIA-364-27, Test Condition A except where noted by *. Mate connectors and shock at <b>44* g's</b> with ½ sine wave (11 milliseconds) shocks in the ±X, ±Y, ±Z axes ( <b>18 shocks total</b> ).	<b>10 milliohms MAXIMUM</b> (change from initial])	
5.2.6	<b>Wire Pullout Force (Axial)</b>	Apply an axial pullout force on the wire at a rate of <b>25 ± 6 mm (1 ± ¼ inch)</b> . UL1977 Edition 2	<b>AWG</b>	<b>MINIMUM Pullout force</b>
			20	<b>36 N (8 lbf)</b>
			22	<b>36 N (8 lbf)</b>
			24	<b>26.7 N (6 lbf)</b>
26	<b>17.8 N (4 lbf)</b>			
5.2.7	<b>Terminal Insertion Force (into Housing)</b>	Apply an axial insertion force on the terminal at a rate of <b>25 ± 6 mm (1 ± ¼ inch)</b> .	<b>10 N (2.3 lbf)</b> MAXIMUM insertion force	


REVISION: <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE: <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No. <b>5 of 7</b>
DOCUMENT NUMBER: <b>PS-36876-001</b>	CREATED / REVISED BY: <b>NCSR</b>	CHECKED BY: <b>NCSR</b>	APPROVED BY: <b>KPRASAD</b>

## 5.2 ENVIRONMENTAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT										
5.3.1	<p><b>Shock (Thermal)</b></p> <p>EIA-364-1000 Test Group 2</p>	<p>Mate connectors; expose to <b>5</b> cycles of:</p> <table border="1"> <thead> <tr> <th>Temperature °C</th> <th>Duration (Minutes)</th> </tr> </thead> <tbody> <tr> <td>-40 +0/-3</td> <td>30</td> </tr> <tr> <td>+25 ±10</td> <td>5 MAXIMUM</td> </tr> <tr> <td>+105 +3/-0</td> <td>30</td> </tr> <tr> <td>+25 ±10</td> <td>5 MAXIMUM</td> </tr> </tbody> </table> <p>EIA-364-32E Test condition I</p>	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+105 +3/-0	30	+25 ±10	5 MAXIMUM	<p><b>10</b> milliohms MAXIMUM (change from initial) &amp; Visual: No Damage</p>
Temperature °C	Duration (Minutes)												
-40 +0/-3	30												
+25 ±10	5 MAXIMUM												
+105 +3/-0	30												
+25 ±10	5 MAXIMUM												
5.3.2	<p><b>Cyclic Temperature &amp; Humidity</b></p> <p>EIA-364-1000 Test Group 2</p>	<p>Mate connectors: cycle per EIA-364-31: <b>24</b> cycles at temperature <b>25 ± 3°C</b> at <b>80 ± 5%</b> relative humidity and <b>65 ± 3°C</b> at <b>50 ± 5%</b> relative humidity; dwell time of <b>1.0</b> hour; ramp time of <b>0.5</b> hours.</p>	<p><b>10</b> milliohms MAXIMUM (change from initial) &amp; Dielectric Withstanding Voltage: No Breakdown at <b>500 VAC</b> &amp; Insulation Resistance: <b>1000</b> Megohms MINIMUM &amp; Visual: No Damage</p>										
5.3.3	<p><b>Temperature Life</b></p> <p>EIA-364-1000 Test Group 1</p>	<p>Mate connectors; expose to: <b>240</b> hours at <b>105 ± 2°C</b>. Tested for field temperature of <b>65 °C</b> and field life of <b>10</b> years. EIA-364-17, Method A</p>	<p><b>10</b> milliohms MAXIMUM (change from initial]) &amp; Visual: No Damage</p>										
5.3.4	<p><b>Thermal Cycling</b></p> <p>EIA-364-1000 Test Group 5</p>	<p>Cycle the connector between <b>15 °C ± 3 °C</b> and <b>85 °C ± 3 °C</b>. Humidity is not controlled. EIA-364-1000, Table 5</p>	<p><b>10</b> milliohms MAXIMUM (change from initial]) &amp; Visual: No Damage</p>										

REVISION: <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE: <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No. <b>6 of 7</b>
DOCUMENT NUMBER: <b>PS-36876-001</b>	CREATED / REVISED BY: <b>NCSR</b>	CHECKED BY: <b>NCSR</b>	APPROVED BY: <b>KPRASAD</b>

## 6.0 TEST SEQUENCES

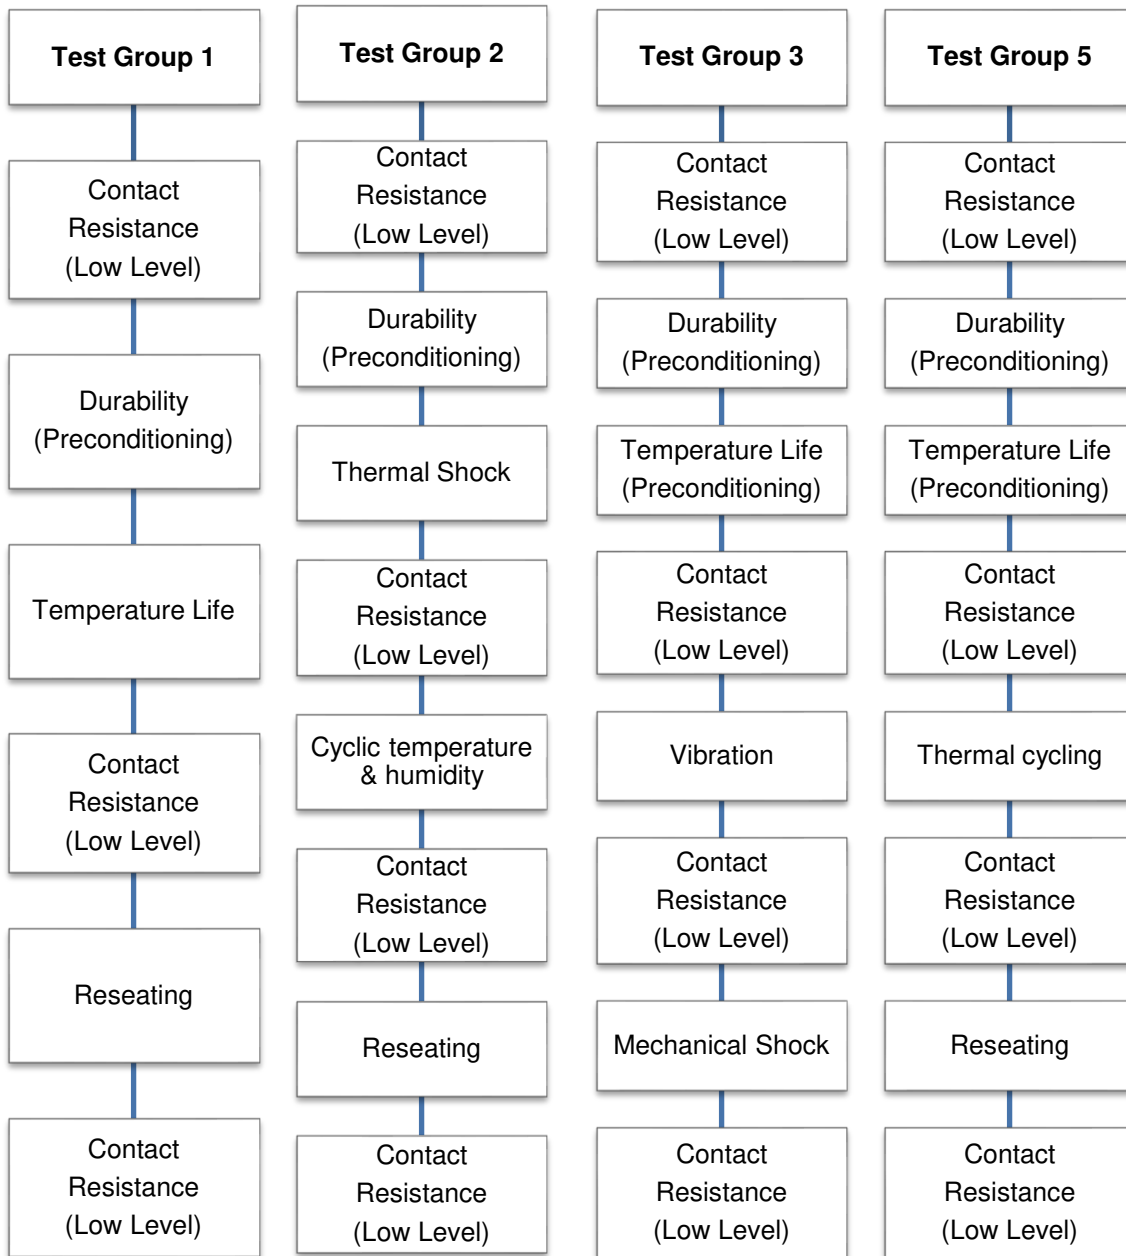

## 7.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage. Palletized shipment is the recommended over single box/ single reel shipment as the former offers better protection against damage to parts.

REVISION: <b>A</b>	ECR/ECN INFORMATION: EC No: <b>I2015-0055</b> DATE: <b>2014 / 11 / 27</b>	TITLE: <b>PRODUCT SPECIFICATION FOR DITTO™ INTERCONNECTS</b>	SHEET No. <b>7 of 7</b>
DOCUMENT NUMBER: <b>PS-36876-001</b>	CREATED / REVISED BY: <b>NCSR</b>	CHECKED BY: <b>NCSR</b>	APPROVED BY: <b>KPRASAD</b>