

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SPECIFICATION FOR APPROVAL

PART NAME EMI FILTER DELTA MODEL 03SEE	
	G3S
ORDER P/N. 03SEEG3S SAMPLE ISSUE DATE	

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING	115/250VAC
---------------------	------------

1-2. CURRENT RATING

Α.	A'l'	115VAC	 3	Α	RMS	Max.	
В.	ΑТ	250VAC	 3	А	RMS	Max.	

1 - 3.	OPERATING	FREQUENCY	50/60	Hz
.	OI DIWITITY O	1 1 4 4 6 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	00,00	112

1-4. LEAKAGE CURRENT: EACH LINE TO GROUND

Α.	@115VAC	60Hz		0.2	mA	Max.
----	---------	------	--	-----	----	------

B. @250VAC 50Hz 0.4 mA Max.

1-5. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND 2250VI	Α.	LINE TO G	GROUND		2250VD	С
--------------------------	----	-----------	--------	--	--------	---

B. LINE TO LINE 1450VDC

1-6. TEMPERATURE RANGE: $-25 \sim +100^{\circ}\text{C}$ (DERATING ABOVE 40°C)

1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	5	5	20	30	45	55	55	45	40
DIF. MODE dB	/	2	8	10	18	20	25	30	35

1−8. SAFETY **(1)** (1) (1)




			_	
REPORT BY	CHECKED BY	APPROVED BY		
			REV.	


SPECIFICATION FOR APPROVAL

TO:____

PART NO.		REV.	DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER		DELTA MODEL	03SEEG3S
ORDER P/N.	03SEEG3S		SAMPLE ISSUE DATE	

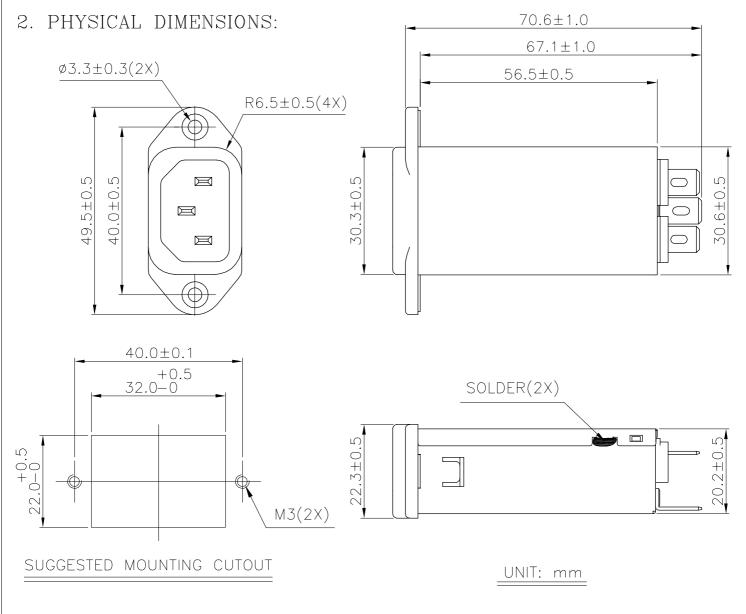

3. SCHEMATIC:

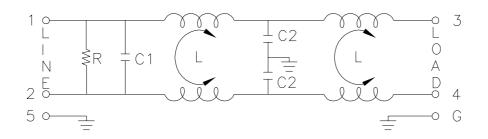

L: 3.7mH C1: 0.22uF C2: 2200pF R: 1MΩ

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .X± .XX± ANGLES±	
			RFV	