



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Power unit IC for pagers

BH6111FV

The BH6111FV is a power unit IC with a driver for VFM switching regulator controllers and vibrators, LEDs, speakers, and LCD backlights. It has internal sensors to detect the reset voltage and battery ejection.

●Applications

Pagers

●Features

- 1) Internal VFM-type CMOS switching regulator and drivers for 6 channels.
- 2) Equipped with a reset voltage sensor and battery ejection sensor.

●Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Limits	Unit
Power supply voltage	V _{CC}	-0.3~+6.0	V
Driver output applied voltage	V _{Max.}	-0.3~+7.0	V
Power dissipation	P _d	*400	mW
Maximum driver output current (1)	I _{OM1}	500	mA
Maximum driver output current (2)	I _{OM2}	400	mA
Maximum driver output current (3)	I _{OM3}	300	mA
Operating temperature	T _{opr}	-15~+60	°C
Storage temperature	T _{stg}	-55~+125	°C

* Reduced by 4 mW for each increase in Ta of 1°C over 25°C.



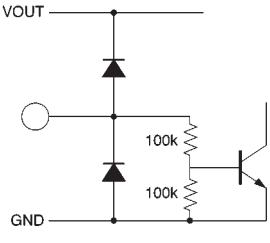
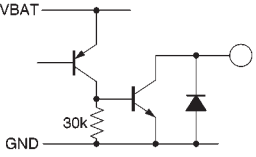
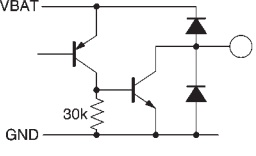
●Recommended operating conditions

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{CC}	0.9~2.5	V
Driver unit operating frequency	f _{drv}	DC~100	kHz

●Block diagram

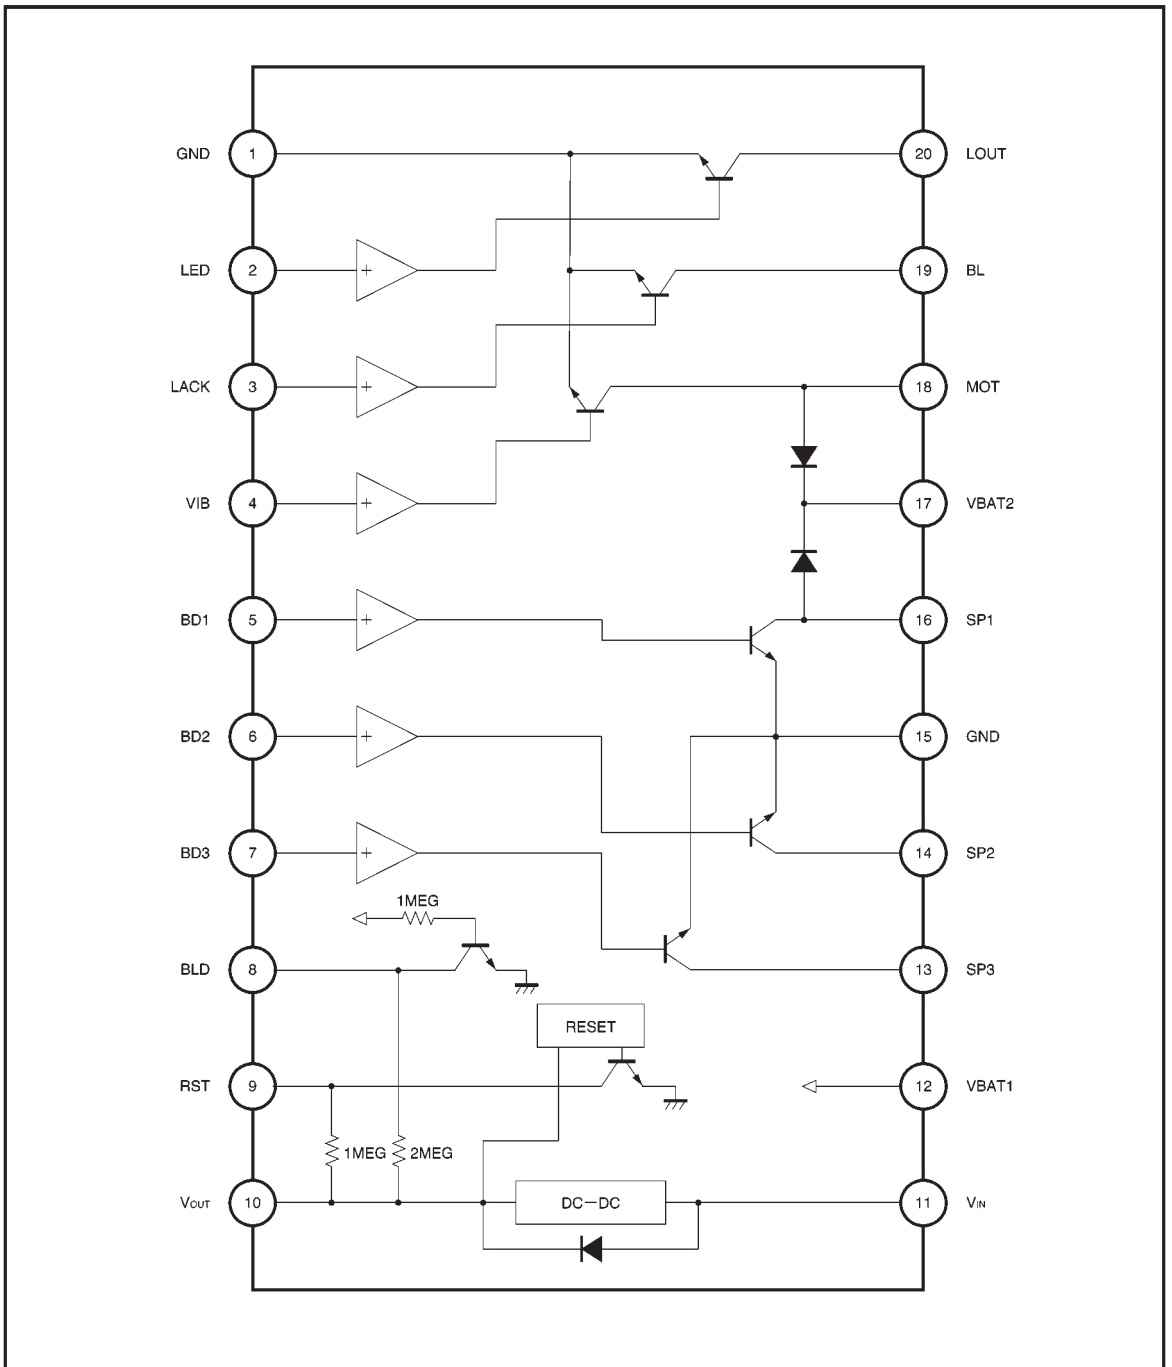


● Pin descriptions

Pin No.	Pin name	I/O	Pin voltage	Internal equivalent circuit	Function
1	GND 2	I	GND		Grounding pin
15	GND 1	I			
12	VBAT 1	I	VBAT		Battery pin
17	VBAT 2	I			
2	LED	I	0V		Driver input pin *1 *2 *3
3	LACK	I			
4	VIB	I			
5	BD 1	I			
6	BD 2	I			
7	BD 3	I			
13	SP 3	O	—		Driver output pin
14	SP 2	O			
19	BL	O			
20	LOUT	O			
16	SP 1	O	—		Driver output pin (internal Di for surge absorption)
18	MOT	O			

*1 Driver unit input current (3 V system)
LED, LACK, VIB, BD1, BD2, BD3: 27 μ A


*3 Driver unit temperature characteristic
(Low level hold boundary voltage)

*2 Driver unit current consumption (1.5 V system)
LED, LACK, SP2, SP3: 4.1 mA
SP1 : 4.7 mA
VIB : 5.6 mA

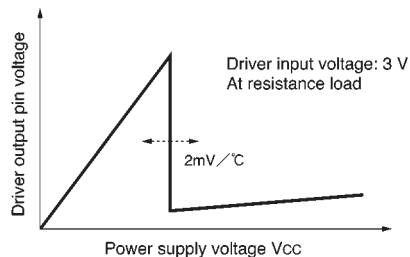


Pin No.	Pin name	I/O	Pin voltage	Internal equivalent circuit	Function
8	BLD	O	—		Battery ejection voltage detection pin *4 (When battery is removed: HIGH) Current consumption 1.5 V system: 0.9 μ A 3 V system : 1.5 μ A
9	RST	O	—		CPU reset voltage detection pin *5 (When output power is reduced: LOW) Current consumption 3 V system: 1.8 μ A
10	V _{OUT}	O	3V		DC/DC converter output pin
11	V _{IN}	I	—		DC/DC converter switching pin (internal Di for rectification)

*4 Operation theory for battery ejection circuit

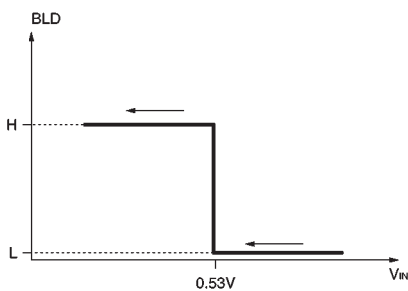


*5 Operation theory for CPU reset circuit

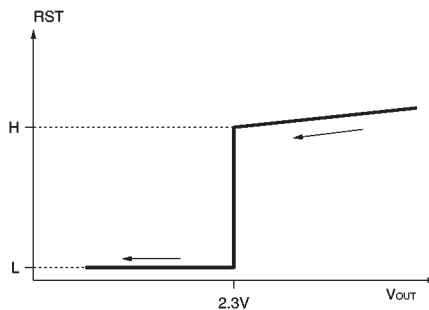

●Electrical characteristics (unless otherwise noted, Ta = 25°C, V_{DD} = 1.5V)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement circuit
〈Overall circuit〉							
Current dissipation	I _{IN}	—	34	60	μA	With no load on DC-DC converter	Fig.1
〈DC-DC converter unit〉							
Output voltage	V _{OUT}	2.85	3.00	3.08	V	I _{OUT} =1.0mA	Fig.1
Operation initiation power supply voltage	V _{ST}	—	0.85	0.9	V	I _{OUT} =1.0mA, V _{CC} ; 0V→2V	Fig.1
Operation sustain power supply voltage	V _{HD}	—	0.50	0.7	V	I _{OUT} =1.0mA, V _{CC} ; 2V→0V	Fig.1
Input voltage stability	ΔV _{O1}	—	20	100	mV	I _{OUT} =1.0mA, V _{CC} =0.9~2.5V	Fig.1
Load regulation	ΔV _{O2}	—	20	100	mV	I _{OUT} =0.1~5.0mA	Fig.1
Oscillation duty ratio	D _{fMax.}	—	70	—	%		Fig.1
Oscillation frequency	f _{osc}	80	100	120	kHz		Fig.1
Efficiency	η	70	80	—	%	I _{OUT} =3.0mA	Fig.1
〈CPU reset circuit / battery ejection circuit unit〉							
Reset detection voltage	VRM	2.1	2.3	2.5	V		Fig.1
BLD detection voltage	VBLD	0.48	0.53	0.58	V	V _{CC} value when V8 pin is 1.5 V	Fig.1
Output high level voltage	VOH	2.7	3.0	—	V		Fig.1
Output low level voltage	VOL	—	0.1	0.4	V		Fig.1
〈Vibrator control unit〉							
Maximum output drive current	I _{OM1}	300	—	—	mA	V _{SAT} ≤0.5V	Fig.1
Saturation voltage	V _{SAT1}	—	0.2	0.3	V	I _{OUT} =195mA	Fig.1
Leakage current when off	I _{L1}	—	0.0	5.0	μA	V _{OUT} =5V	Fig.1
Input threshold level	V _{TH1}	1.0	1.4	1.8	V		Fig.1
Input current	I _{IN1}	15	27	35	μA	V _{IN} =3.0V	Fig.1
〈Speaker control unit 1〉							
Maximum output drive current	I _{OM2}	200	—	—	mA	V _{SAT} ≤0.5V	Fig.1
Saturation voltage	V _{SAT2}	—	0.1	0.2	V	I _{OUT} =90mA	Fig.1
Leakage current when off	I _{L2}	—	0.0	5.0	μA	V _{OUT} =5V	Fig.1
Input threshold level	V _{TH2}	1.0	1.4	1.8	V		Fig.1
Input current	I _{IN2}	15	27	35	μA	V _{IN} =3.0V	Fig.1
〈Speaker control units 2 and 3, LED control unit, LCD backlight control unit〉							
Maximum output drive current	I _{OM3}	100	—	—	mA	V _{SAT} ≤0.5V	Fig.1
Saturation voltage	V _{SAT3}	—	0.1	0.2	V	I _{OUT} =45mA	Fig.1
Leakage current when off	I _{L3}	—	0.0	5.0	μA	V _{OUT} =5V	Fig.1
Input threshold level	V _{TH3}	1.0	1.4	1.8	V		Fig.1
Input current	I _{IN3}	15	27	35	μA	V _{IN} =3.0V	Fig.1

● Measurement circuits

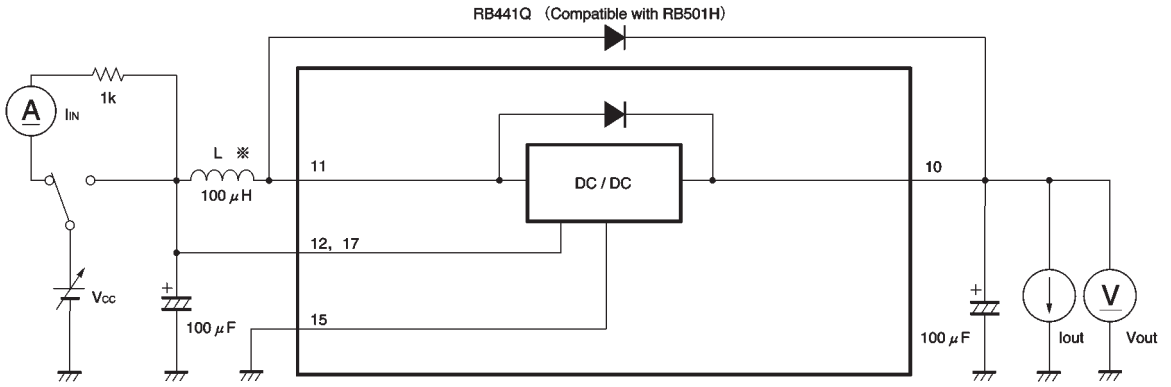


※ LQH4N (MURATA)

a. DC / DC converter unit

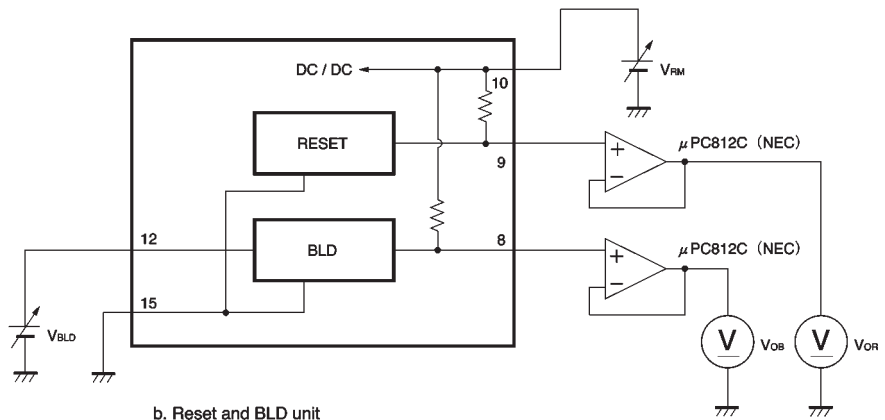

b. Reset and BLD unit

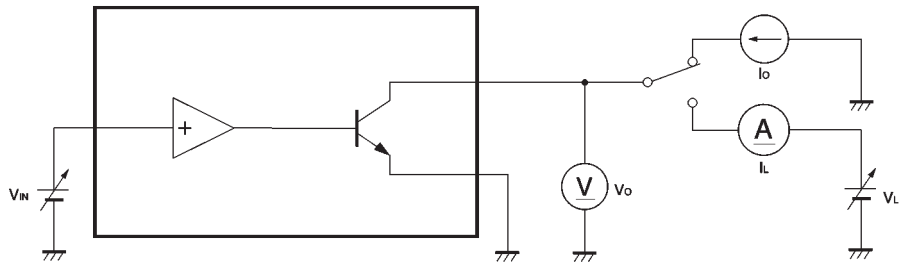

c. Driver unit

Fig. 1

●Application example

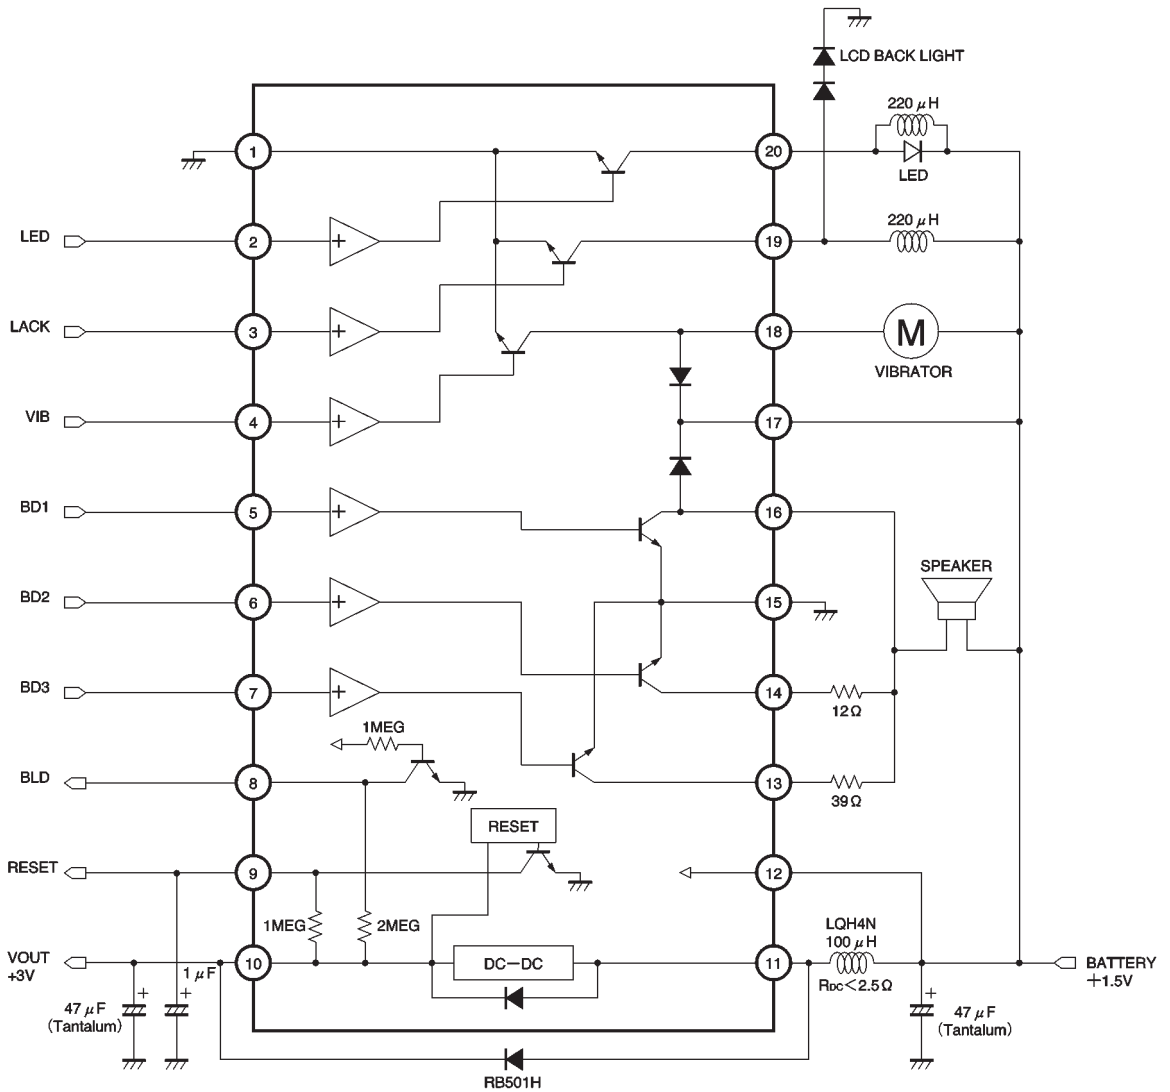


Fig. 2

●Electrical characteristic curves

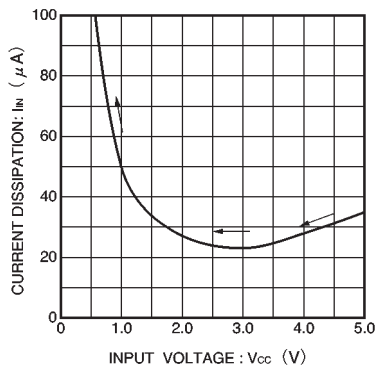


Fig. 3 Current dissipation vs. input voltage

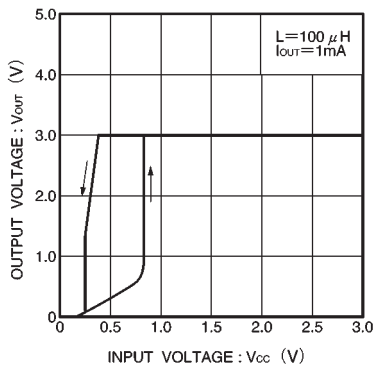


Fig. 4 DC/DC converter Output voltage vs. input voltage

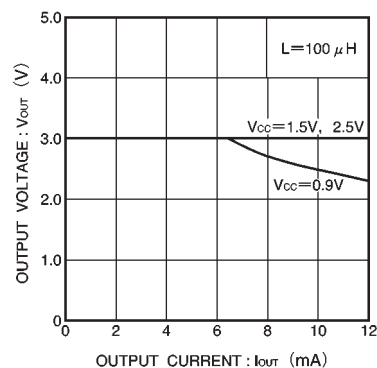


Fig. 5 DC/DC converter Output voltage vs. output current

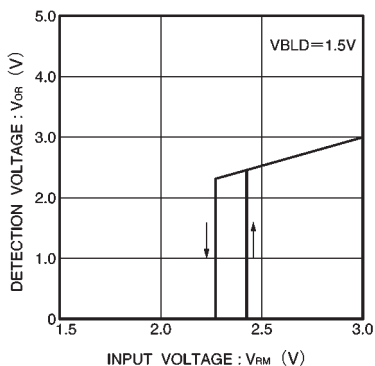


Fig. 6 Reset detection voltage

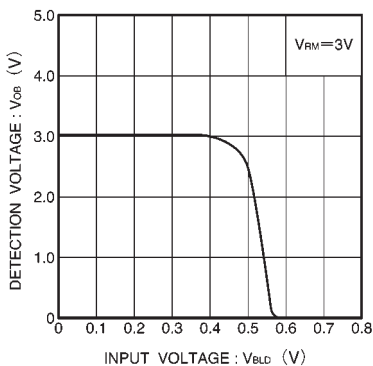


Fig. 7 BLD detection voltage

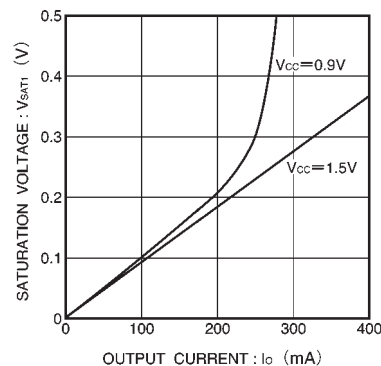


Fig. 8 Vibrator control unit Saturation voltage vs. output current

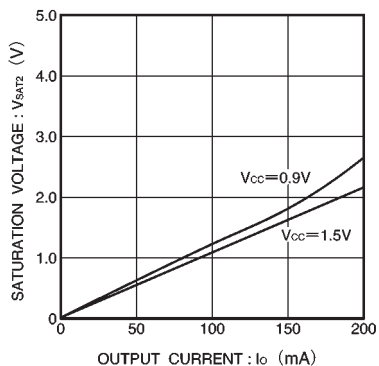


Fig. 9 Speaker control unit 1 Saturation voltage vs. output current

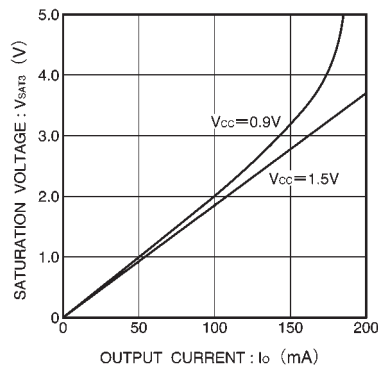


Fig. 10 Speaker control units 2 and 3, LED control unit, LCD backlight control unit Saturation voltage vs. output current

● External dimensions (Units: mm)

