



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CAR1212FP series rectifier

Input: 85Vac to 264Vac; Output: 12Vdc @ 1250W; 5 Vdc @ 0.5A



Applications

- 12Vdc distributed power architectures
- Datacom and Telecom applications
- Mid to high-end Servers
- Enterprise Networking
- Network Attached Storage
- Telecom Access Nodes
- Routers/Switches
- Broadband Switches
- ATE Equipment

Description

The CAR1212FP series of rectifiers provide highly efficient isolated power from world-wide commercial AC mains. Offered in the industry standard compact 1U form factor, these rectifiers complement the CAR1212DC converter line, providing comprehensive solutions for systems connected either to commercial ac mains or 48/60Vdc power plants. This plug and play approach, between AC and DC input units, has significant advantages since systems can be readily reconfigured by simply replacing the power supply.

The high-density, front-to-back airflow is designed for minimal space utilization and is highly expandable for future growth.

Features

- Universal input with PFC
- Constant power characteristic
- 3 front panel LEDs:
- Remote ON/OFF control of the 12Vdc output
- Remote sense on the 12Vdc output
- No minimum load requirements
- Active load sharing (single wire)
- Hot Plug-ability
- Efficiency: typically 89% at high line
85% at low line
- Standby : 5Vdc
- Auto recoverable OC & OT protection
- Operating temperature: -10 - 70°C (de-rated above 50°C)
- Digital status & control: I²C serial bus
- EN/IEC/UL60950-1 2nd edition; UL, CSA and VDE
- EMI: class A FCC docket 20780 part 15, EN55022
- Meets EN6100 immunity and transient standards
- Shock & vibration: NEBS GR-63-CORE, level 3

CAR1212FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1250W; 5 Vdc @ 0.5A

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only, functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

Parameter	Device	Symbol	Min	Max	Unit
Input Voltage: Continuous	All	V _{IN}	0	264	V _{ac}
Operating Ambient Temperature		TA	-10	70 ¹	°C
Storage Temperature		T _{stg}	-40	85	°C
I/O Isolation voltage to Frame (100% factory Hi-Pot tested)				1500	V _{ac}

Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, load, and temperature conditions.

INPUT							
Parameter	Device	Symbol	Min	Typ	Max	Unit	
Operational Range	All	V _{IN}	85	110/230	264	V _{ac}	
Frequency Range (ETSI 300-132-1 recommendation)		F _{IN}	47	50/60	63	Hz	
Main Output Turn_OFF		V _{IN}			80	V _{ac}	
Maximum Input Current (V _O = V _{O,set} , I _O =I _{O,max})		I _{IN}			12 8.1	A _{ac}	
Cold Start Inrush Current (Excluding x-caps, 25°C, <10ms, per ETSI 300-132)		I _{IN}			35	A _{peak}	
Efficiency (T _{amb} =25°C, V _{in} = 230V, V _{out} = 12V, I _{O,max})		η			high line 89 low line 85	%	
Power Factor (V _{in} =230Vac, I _O =I _{O,max})		PF			0.99		
Holdup time ² (V _{out} = 12V _{dc} , T _{amb} 25°C)		T			V _{in} = 220V _{ac} , 1250W V _{in} = 100V _{ac} , 1000W	ms	
Ride through		T			10	ms	
Leakage Current (V _{in} = 250Vac, F _{in} = 60Hz)		I _{IN}			3	mArms	
Isolation Input/Output Input/Frame Output/Frame				3000			V _{ac}
				1500			V _{ac}
				50			V _{dc}

12V _{dc} MAIN OUTPUT							
Parameter	Device	Symbol	Min	Typ	Max	Unit	
Output Power (V _{in} ≥ 180V _{ac} V _{in} ≤ 175V _{ac} V _{in} ≤ 90V _{ac})	All	W	-	-	1250 1000 900	W	
Set point		V _{out}		11.9	12.00	12.1	V _{dc}
Overall regulation (load, temperature, aging)				-3		+3	%
Ripple and noise ³						120	mV _{p-p}
Turn-ON overshoot					+3	%	
Turn-ON delay		T			2	sec	

12V _{dc} MAIN OUTPUT (continued)							
Parameter	Device	Symbol	Min	Typ	Max	Unit	

¹ Derated above 50°C at 2.5%/°C

² 12V output can decay down to 10.8V

³ Measured across a 10μf electrolytic and a 0.1μf ceramic capacitors in parallel. 20MHz bandwidth

CAR1212FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1250W; 5 Vdc @ 0.5A

Remote ON/OFF delay time	All	V _{out}			20	ms
Turn-ON rise time (10 – 90% of V _{out})					50	ms
Transient response 50% step [10%-60%, 50% - 100%] (di/dt – 1A/μs, recovery 300μs)			-5		+5	%V _{out}
Programmable range (hardware & software)		11.4		12.6	V _{dc}	
Overvoltage protection, latched (recovery by cycling OFF/ON via hardware or software)		14.5	15	15.5	V _{dc}	
Output current V _{in} = HL V _{in} = LL		I _{out}	0		104 83.5	A _{dc}
Current limit, Hiccup (programmable level)			110		145	% of FL
Active current share			-5		+5	% of FL

AUXILIARY OUTPUT						
Parameter	Device	Symbol	Min	Typ	Max	Unit
Set point	All	V _{out}		5.0		V _{dc}
Overall regulation (load, temperature, aging)	All	V _{out}	-5		+5	%
Ripple and noise	All				50	mVp-p
Output current	All	I _{out}	0		0.5	A _{dc}
Isolation Output/Frame	All		50			V _{dc}

Environmental, Reliability					
Parameter	Min	Typ	Max	Units	Notes
Ambient Temperature	-10		50	°C	Air inlet from sea level to 5,000 feet.
Operating			1524/5k	m / ft	
Altitude Operating			2.5	%/°C	
Power Derating			2.0	°C/1000 ft	51°C to 70°C Above 5,000 ft
Storage	-40		85	°C	
Altitude non-operating			8200/30k	m / ft	
Acoustic noise			45	dbA	Full load, 25°C
Over Temperature Protection		110/95		°C	Shutdown / restart
Humidity	30 10		95	%	Relative humidity, non-condensing
Operating			95		
Storage					
Shock and Vibration acceleration			6	Grms	NEBS GR-63-CORE, Level 3, 20 -2000Hz, min 30 minutes
Earthquake Rating	4			Zone	NEBS GR-63-CORE, all floors, Seismic Zone 4 Designed and tested to meet NEBS specifications.
MTBF		320,000 100,000		hrs	Full load, 25°C per Bellcore RPP Full load, 50°C per Bellcore RPP

CAR1212FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1250W; 5 Vdc @ 0.5A

EMC				
Parameter	Criteria	Standard	Level	Test
AC input	Conducted emissions	EN55022, FCC Docket 20780 part 15, subpart J EN61000-3-2	A*	0.15 – 30MHz 0 – 2 KHz
	Radiated emissions	EN55022	A*	30 – 10000MHz
	Voltage dips	EN61000-4-11	A	-30%, 10ms
			C	-60%, 100ms
			C	-100%, 5sec
	Voltage surge	EN61000-4-5	A	4kV, 1.2/50µs, common mode
			A	2kV, 1.2/50µs, differential mode
immunity	Fast transients	EN61000-4-4	B	5/50ns, 2kV (common mode)
Enclosure immunity	Conducted RF fields	EN61000-4-6	A	130dBµV, 0.15-80MHz, 80% AM
	Radiated RF fields	EN61000-4-3	A	10V/m, 80-1000MHz, 80% AM
		ENV 50140	A	
	ESD	EN61000-4-2	B	4kV contact, 8kV air

* Note: Contact the factory for a recommended external EMI filter to meet Class B emissions

Status and Control

Details of analog controls are provided in this data sheet under Signal Definitions. GE Energy will provide separate application notes on the I2C protocol. Contact your local GE Energy representative for details.

Signal Definitions

All signals and outputs are referenced to Output return. These include 'Vstb return' and 'Signal return'.

Input Signals

Voltage programming (V_{prog}): An analog voltage on this signal can vary the output voltage $\pm 5\%$ from 11.4Vdc to 12.6Vdc. The equation of this signal is:

$$V_{out} = 11.4 + (V_{prog} * 0.3) \quad 0 < V_{prog} < 4$$

If V_{prog} is $> 4V$ or left open the programming signal is ignored and the unit output is set at the setpoint of 12Vdc.

Load share (Ishare): This is a single wire analog signal that is generated and acted upon automatically by power supplies connected in parallel. The Ishare pins should be tied together for power supplies if active current share among the power supplies is desired. No resistors or capacitors should get connected to this pin.

Remote ON/OFF: Controls the presence of the main 12Vdc output voltage. This is an open collector, TTL level control signal. This signal needs to be pulled HI externally through a resistor. Maximum collector voltage is 12Vdc and the maximum sink current is 20mA. A Logic 1 (TTL HI level) turns ON the 12Vdc output, while a Logic 0 (TTL LO level) turns OFF the 12Vdc output.

This signal is not overwritten by the firmware ON/OFF instruction. The default firmware setting is ON. An OFF

command either through this signal or firmware would turn OFF the power supply.

The default state re-initializes if bias power is interrupted to the processor.

Enable: This is a short signal pin that controls the presence of the 12Vdc main output. This pin should be connected to 'output return' on the system side of the output connector. The purpose of this pin is to ensure that the output turns ON after engagement of the power blades and turns OFF prior to disengagement of the power blades.

Write protect (WP): This signal protects the contents of the EEPROM from accidental over writing. When left open the EEPROM is write protected. A LO (TTL compatible) permits writing to the EEPROM. This signal is pulled HI internally by the power supply. Used only for factory programming

Output signals

Output current monitor (Imon): A voltage level of 0.05V / A proportional to the delivered output current is present on this pin. Accuracy $\pm 10\%$ of FL at loads $> 25\%$ of FL.

AC OK: A TTL compatible status signal representing whether the input voltage is within the anticipated range. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 20mA$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that the input voltage is applied within the specified input range.

DC OK: A TTL compatible status signal representing whether the output voltage is present. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 20mA$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that the output voltage is present.

Over temp warning: A TTL compatible status signal representing whether an over temperature exists. This signal needs to be pulled HI externally through a resistor.

CAR1212FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1250W; 5 Vdc @ 0.5A

Maximum sink current $\leq 20\text{mA}$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that temperatures are normal.

If an over temperature should occur, this signal would pull LO for approximately 10 seconds prior to shutting down the power supply. The unit would restart if internal temperatures recover within normal operational levels. At that time the signal reverts back to its open collector (HI) state.

Fault: A TTL compatible status signal representing whether a Fault occurred. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 4\text{mA}$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that no Fault is present.

This signal activates for OTP, OVP, OCP, AC fault or No output.

PS Present: This pin is connected to 'output return' within the power supply. Its intent is to indicate to the system that a power supply is present. This signal may need to be pulled HI externally through a resistor.

Interrupt (SMBAlert): A TTL compatible status signal, representing the SMBusAlert# feature of the PMBus compatible i²C protocol in the power supply. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 4\text{mA}$ and the pull up resistor should be tied to 3.3Vdc. Open collector (HI) on this signal indicates that no Interrupt has been triggered.

Serial Bus Communications

The I²C interface facilitates the monitoring and control of various operating parameters within the unit and transmits these on demand over an industry standard I²C Serial bus.

All signals are referenced to 'Signal Return'.

Device addressing: The microcontroller (MCU) and the EEPROM have the following addresses:

Device	Address	Address Bit Assignments (Most to Least Significant)							
MCU	0xBx	1	0	1	1	A2	A1	A0	R/W
EEPROM	0xAx	1	0	1	0	A2	A1	A0	R/W

Address lines (A2, A1, A0): These signal pins allow up to eight (8) modules to be addressed on a single I²C bus. The pins are pulled HI internal to the power supply. For a logic LO these pins should be connected to 'Output Return'

Serial Clock (SCL): The clock pulses on this line are generated by the host that initiates communications across the I²C

Serial bus. This signal is not pulled up internally. The end user should add pull up resistance to 5Vdc as necessary to ensure that rise and fall time timing and the maximum sink current is in compliance to the I²C specifications.

Serial Data (SDA): This line is a bi-directional data line. This signal is not pulled up internally. The end user should add pull up resistance to 5Vdc as necessary to ensure that rise and fall time timing and the maximum sink current is in compliance to the I²C specifications.

Communications Protocol

The I²C protocol is described in detail by the *I²C and PMBus Serial Communications Protocol for the CAR Family of Power Supplies* application note.

The Y01A suffix module supports only the I²C command set.

I/O Expander option (PCF8574ATD-T)

The CAR1212FPx without extended i2c communications (blank under the software option) has a single status/control byte I/O expander that is accessible via default address 0x7Eh (A2, A1, A0 are pulled HI). This byte takes the form;

7	6	5	4	3	2	1	0
n/s	n/s	Fault	ON/OFF	Temp_OK	n/s	DCOK	ACOK

n/s – not supported

Bits 0, 1, 3, and 5 are 'read_only' and are HI [1] during normal operation. The rectifier needs to be biased externally in order to 'read' its operational state without the presence of input power.

Bit 4 is a 'read/write' bit that can be used to verify the ON/OFF commanded state or change the commanded output of the rectifier. In order to turn the output OFF this bit needs to be pulled LO [0].

No PEC support is provided. Standard i²c commands apply.

LEDs

Three LEDs are located on the front faceplate. The AC_OK LED provides visual indication of the INPUT signal function. When the LED is ON GREEN the power supply input is within normal design limits.

When the DC_OK LED is GREEN the DC output is present.

When the FAULT_LED is RED then a fault condition exists and the power supply may not provide output power. The table below further defines these states:

CAR1212FP series rectifier


Input: 85Vac to 264Vac; Output: 12 Vdc @ 1250W; 5 Vdc @ 0.5A

Alarm Table

Test Condition		LED Indicator			Monitoring Signals			
		AC OK	DC OK	FAULT	FAULT	DC OK	INPUT OK	TEMP OK
1	Normal Operation	Green	Green	OFF	High	High	High	High
2	Low or NO INPUT	OFF	OFF	Red	Low	Low	Low	High
3	OVP	Green	OFF	Red	Low	Low	High	High
4	Over Current	Green	OFF	Red	Low	Low	High	High
5	Over Temp Alarm	Green	Green	Red	Low	High	High	Low
6	Over Temp Fault	Green	OFF	Red	Low	Low	High	Low

Notes: Test condition #2 had 2 modules plug in. One module is running and the other one is with no AC.

Outline Drawing

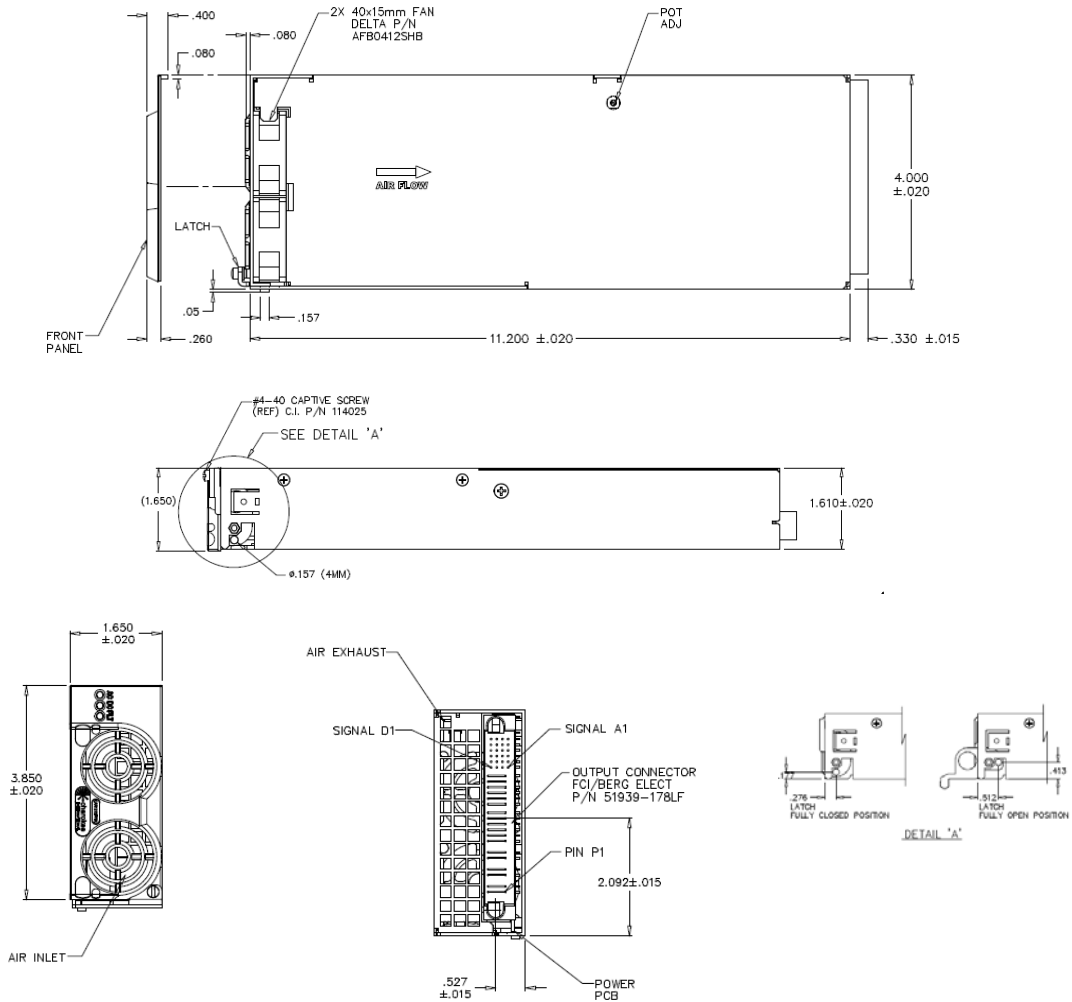

CAR1212FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1250W; 5 Vdc @ 0.5A


Connector Pin Assignments

Mating Connector:

FCI/Berg P/N 51939-178

Mating connector: Primary Source: FCI berg P/N 51866-025 (right angle mounting)
or FCI berg P/N 51940-117 (straight mounting)

Connector Drawing



Pin	Function	Pin	Function	Pin	Function	Pin	Function
A1	Vstb [5V]	B1	Fault	C1	IShare	D1	VProg
A2	Vstb [5V] Return	B2	I Monitor (IMON)	C2	No connect	D2	OVP Test Point
A3	Signal Return	B3	Enable: "0" -ON "1" -OFF	C3	Over Temp Warning	D3	Remote ON/OFF
A4	Write Protect (WP)	B4	PS Present	C4	I ² C Address (A0)	D4	DC OK
A5	Remote Sense (+)	B5	SDA (I ² C bus)	C5	I ² C Address (A1)	D5	AC OK
A6	Remote Sense (-)	B6	SCL (I ² C bus)	C6	I ² C Address (A2)	D6	SMBAlert

P1	Line	P2	Neutral	P3	Chassis		
P4 - P6	Output Return					P7- P9	+12Vout

Ordering Information

Please contact your GE Energy Sales Representative for pricing, availability and optional features.

PRODUCT	DESCRIPTION	PART NUMBER
1250W Rectifier	+12Vout , 5Vaux, RoHS 6 of 6	CAR1212FPXXXZ01A
1250W Rectifier	+12Vout , 5Vaux, with face plate, RoHS 6 of 6	CAR1212FPBX5Z01A
1250W Rectifier	+12Vout , 5Vaux, with face plate, I2C option, RoHS 6 of 6	CAR1212FPBC5Z01A
1250W Rectifier	+12Vout , 5Vaux, with I2C option, RoHS 6 of 6	CAR1212FPXC5Z01A

Contact Us

For more information, call us at

USA/Canada:

+1 877 546 3243, or +1 972 244 9288

Asia-Pacific:

+86.021.54279977*808

Europe, Middle-East and Africa:

+49.89.878067-280

www.gecriticalpower.com



GE Critical Power reserves the right to make changes to the product(s) or information contained herein without notice, and no liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.