

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



#### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










High Pass Filter 50Ω BNC 50 MHz 7<sup>th</sup> Order



Part Number: CHPFL-0050-BNC

New BNC
New Briters
High Pass
50 MHz
50 MHz
64PF1-0050-8NC
64PF1-520-01

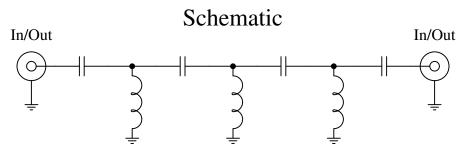

(65.79)

1.480

(37.59)

#### Features:

- 7<sup>th</sup> Order Chebyshev Response
- 50Ω BNC Connectors

## **Applications:**

- Test Equipment
- Lab Use

## **Maximum Ratings:**

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -45°C to 90°C

Crystek's new line of BNC High Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.

BNC

Male

Designed for Test Equipment and General Lab Use.

Rev A
Page 1 of 3

0.550

(13.97)

 $\bigcirc$ 

**BNC** 


Female




12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913 PHONE: 239-561-3311 • 800-237-3061 FAX: 239-561-1025 • WWW.CRYSTEK.COM



## High Pass Filter CHPFL-0050-BNC

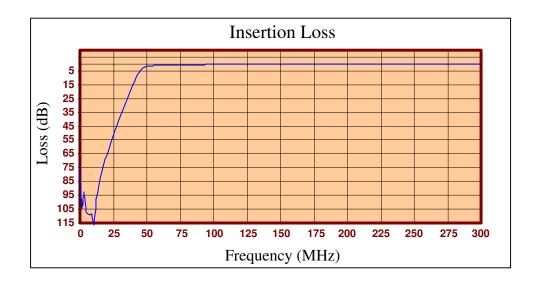

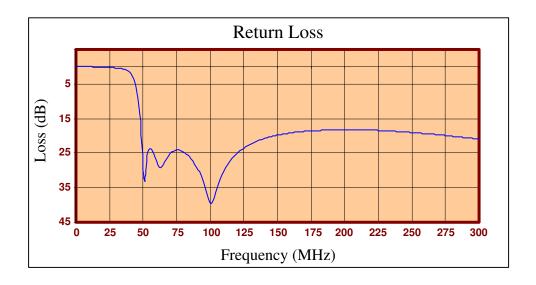

Rev A

Page 2 of 3





# High Pass Filter CHPFL-0050-BNC

FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	74.43	0.04
1.799	103.96	0.01
3.297	92.76	0.00
4.796	106.98	0.00
6.294	108.49	0.01
7.793	108.95	0.01
9.291	108.49	0.02
10.790	116.15	0.02
12.288	100.72	0.03
13.787	92.24	0.05
15.285	83.39	0.06
16.784	77.57	0.07
18.282	71.86	0.09
21.279	61.63	0.14
22.778	57.02	0.17
24.276	52.62	0.20
25.775	48.42	0.24
27.273	44.40	0.29
28.772	40.50	0.34
30.270	36.71	0.41
31.769	33.01	0.48
33.267	29.38	0.58
36.264	22.28	0.87
37.763	18.79	1.10
39.261	15.35	1.45
42.258	8.91	2.96
43.757	6.23	4.60
57.243	1.05	24.62
63.237	0.83	29.25
78.222	0.56	24.29
100.700	0.37	39.49
105.195	0.35	34.52
120.180	0.30	24.94
135.165	0.28	21.49
168.132	0.26	18.81
225.075	0.22	18.43
273.027	0.18	19.85
300.000	0.17	20.92

_			
Proc	duict.	Con	rol

Crystek Part Number:	CHPFL-0050-BNC	Release Date:	09-Jul-2015
Revision Level:	Α	Responsible:	K. Piotrowicz

Rev A
Page 3 of 3

