



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CLC1020

General Purpose, Rail to Rail Output Amplifier Rail to Rail Amplifiers



FEATURES

- 127 μ A supply current
- 2.1MHz gain bandwidth
- Input voltage range with 5V supply: -0.4V to 4.3V
- Output voltage range with 5V supply: 0.01V to 4.99V
- 2.7V/ μ s slew rate
- 0.7pA bias current
- 0.1mV input offset voltage
- No crossover distortion
- Fully specified at 2.7V and 5V supplies
- Pb-free TSOT-5

APPLICATIONS

- Portable/battery-powered applications
- Mobile communications, cell phones, pagers
- ADC buffer
- Active filters
- Portable test instruments
- Medical Equipment
- Portable medical instrumentation



General Description

The COMLINEAR CLC1020 is a single channel, high-performance, voltage feedback amplifier. The CLC1020 provides 2.1MHz gain bandwidth product and 2.7V/ μ s slew rate making it well suited for high-performance battery powered-systems. This COMLINEAR high-performance amplifier also offers low input offset voltage and low bias current.

The COMLINEAR CLC1020 consumes only 127 μ A supply current and is designed to operate from a supply range of 2.7V to 5.5V (± 1.35 to ± 2.75). The input voltage range extends 400mV below the negative rail and 700mV below the positive rail. The CLC1020 amplifier operates over the extended temperature range of -40°C to +125°C.

The CLC1020 is packaged in the space saving TSOT-5 package. The TSOT-5 package is pin compatible with the SOT23-5 package.


Typical Performance Examples

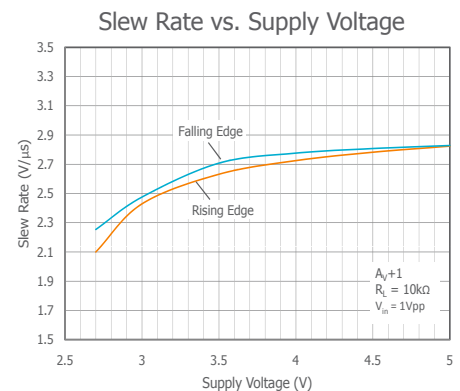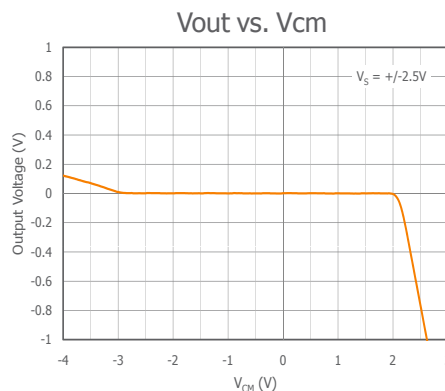


Ordering Information

Part Number	Package	Pb-Free	RoHS Compliant	Operating Temperature Range	Packaging Method
CLC1020IST5X	TSOT-5	Yes	Yes	-40°C to +125°C	Reel

Moisture sensitivity level for all parts is MSL-1.



CLC1020 Pin Configuration

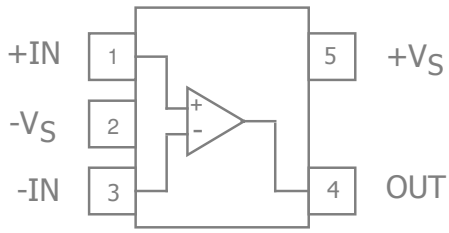

CLC1020 Pin Assignments

Pin No.	Pin Name	Description
1	+IN	Output
2	-V _S	Negative supply
3	-IN	Positive input
4	OUT	Negative input
5	+V _S	Positive supply



Absolute Maximum Ratings

The safety of the device is not guaranteed when it is operated above the "Absolute Maximum Ratings". The device should not be operated at these "absolute" limits. Adhere to the "Recommended Operating Conditions" for proper device function. The information contained in the Electrical Characteristics tables and Typical Performance plots reflect the operating conditions noted on the tables and plots.

Parameter	Min	Max	Unit
Supply Voltage		7	V
Input Voltage Range	$-V_S - 0.4V$	$+V_S$	V
Continuous Output Current	Output is protected against momentary short circuit		

Reliability Information

Parameter	Min	Typ	Max	Unit
Junction Temperature			150	°C
Storage Temperature Range	-65		150	°C
Lead Temperature (Soldering, 10s)			260	°C
Package Thermal Resistance				
5-Lead TSOT		221		°C/W

Notes:

Package thermal resistance (θ_{JA}), JEDEC standard, multi-layer test boards, still air.

ESD Protection

Product	TSOT-5
Human Body Model (HBM)	2kV
Charged Device Model (CDM)	2kV

Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit
Operating Temperature Range	-40		+125	°C
Supply Voltage Range	2.7		5.5	V



Electrical Characteristics at +2.7V

$T_A = 25^\circ\text{C}$, $V_S = +2.7\text{V}$, $R_f = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Frequency Domain Response						
GBWP	Gain Bandwidth Product	$V_{OUT} = 0.2V_{pp}$, $C_L = 200\text{ pF}$, $R_L = 10\text{k}\Omega$, $G=11$		2		MHz
UGBW	Unity Gain Bandwidth	$V_{OUT} = 0.2V_{pp}$, $R_L = 10\text{k}\Omega$, $G=1$		1.6		MHz
BW _{SS}	-3dB Bandwidth	$V_{OUT} = 0.2V_{pp}$, $R_L = 10\text{k}\Omega$, $G=2$		836		kHz
BW _{LS}	Large Signal Bandwidth	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$, $G=2$		540		kHz
G_m	Gain Margin	$G=1$		22		dB
Φ_m	Phase Margin	$G=1$		82		°
Time Domain Response						
t_R, t_S	Rise and Fall Time	$V_{OUT} = 2\text{V step}$, $R_L = 10\text{k}\Omega$		840		ns
t_S	Settling Time to 0.1%	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$		1.6		μs
OS	Overshoot	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$		5.5		%
SR	Slew Rate	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$		2.3		V/ μs
Distortion/Noise Response						
HD2	2nd Harmonic Distortion	$2V_{pp}$, 10kHz, $R_L = 10\text{k}\Omega$		-61		dBc
HD3	3rd Harmonic Distortion	$2V_{pp}$, 10kHz, $R_L = 10\text{k}\Omega$		-70		dBc
THD	Total Harmonic Distortion	$2V_{pp}$, 10kHz, $G=1$, $R_L = 10\text{k}\Omega$		0.094		%
e_n	Input Voltage Noise	$f=100\text{Hz}$		54		nV/ $\sqrt{\text{Hz}}$
		$f=1\text{kHz}$		30		nV/ $\sqrt{\text{Hz}}$
		$f=10\text{kHz}$		17		nV/ $\sqrt{\text{Hz}}$
DC Performance						
V_{IO}	Input Offset Voltage			0.53		mV
dV_{IO}	Average Drift			2.1		$\mu\text{V}/^\circ\text{C}$
I_b	Input Bias Current			0.5		pA
I_{os}	Input Offset Current			0.1		pA
PSRR	Power Supply Rejection Ratio	DC		73		dB
I_S	Supply Current			111		μA
Input Characteristics						
R_{IN}	Input Resistance	Non-inverting Input		29		G Ω
C_{IN}	Input Capacitance	Non-inverting		2.4		pF
CMIR	Common Mode Input Range	For $V_{CM} \leq 50\text{dB}$		-0.4 to 2.0		V
CMRR	Common Mode Rejection Ratio	DC, $V_{cm} = 0\text{V}$ to 1.7V		70.5		dB
Output Characteristics						
V_{OUT}	Output Voltage Swing	$R_L = 2\text{k}\Omega$		0.02 to 2.63		V
		$R_L = 10\text{k}\Omega$		0.01 to 2.68		V
I_{SC}	Short-Circuit Output Current	Sourcing, $V_{OUT} = 0\text{V}$, $G=1$		18		mA
		Sinking, $V_{OUT} = 2.7\text{V}$, $G=1$		58		mA

Notes:

- 100% tested at 25°C




Electrical Characteristics at +5V

$T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $R_f = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Frequency Domain Response						
GBWP	Gain Bandwidth Product	$V_{OUT} = 0.2V_{pp}$, $C_L = 200\text{pF}$, $R_L = 10\text{k}\Omega$, $G = 11$		2.1		MHz
UGBW	Unity Gain Bandwidth	$V_{OUT} = 0.2V_{pp}$, $R_L = 10\text{k}\Omega$, $G = 1$		1.8		MHz
BW _{SS}	-3dB Bandwidth	$V_{OUT} = 0.2V_{pp}$, $R_L = 10\text{k}\Omega$, $G = 2$		907		kHz
BW _{LS}	Large Signal Bandwidth	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$, $G = 2$		576		Hz
G_m	Gain Margin	$G = 1$		18		dB
Φ_m	Phase Margin	$G = 1$		90		°
Time Domain Response						
t_R, t_S	Rise and Fall Time	$V_{OUT} = 2\text{V}$ step, $R_L = 10\text{k}\Omega$		670		ns
t_S	Settling Time to 0.1%	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$		1.6		μs
OS	Overshoot	$V_{OUT} = 2V_{pp}$, $R_L = 10\text{k}\Omega$		5.9		%
SR	Slew Rate	$V_{OUT} = 4V_{pp}$, $R_L = 10\text{k}\Omega$		2.7		$\text{V}/\mu\text{s}$
Distortion/Noise Response						
HD2	2nd Harmonic Distortion	$V_{OUT} = 2V_{pp}$, 10kHz, $R_L = 10\text{k}\Omega$		-67		dBc
HD3	3rd Harmonic Distortion	$V_{OUT} = 2V_{pp}$, 10kHz, $R_L = 10\text{k}\Omega$		-68		dBc
THD	Total Harmonic Distortion	$V_{OUT} = 2V_{pp}$, 10kHz, $R_L = 10\text{k}\Omega$		0.057		%
e_n	Input Voltage Noise	$f = 100\text{Hz}$		57		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 1\text{kHz}$		30		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 100\text{kHz}$		18		$\text{nV}/\sqrt{\text{Hz}}$
DC Performance						
V_{IO}	Input Offset Voltage ⁽¹⁾			0.1	6	mV
dV_{IO}	Average Drift			1.1		$\mu\text{V}/^\circ\text{C}$
I_b	Input Bias Current			0.7	250	pA
I_{os}	Input Offset Current			0.1		pA
PSRR	Power Supply Rejection Ratio ⁽¹⁾	DC	60	73		dB
A_{OL}	Open-Loop Gain ⁽¹⁾	$V_{OUT} = V_S / 2$	70	122		dB
I_S	Supply Current ⁽¹⁾			127	170	μA
Input Characteristics						
R_{IN}	Input Resistance	Non-inverting Input		40		$\text{G}\Omega$
C_{IN}	Input Capacitance	Non-inverting Input		2.2		pF
CMIR	Common Mode Input Range	For $V_{CM} \leq 50\text{dB}$	-0.3	-0.4 to 4.3	4.2	V
CMRR	Common Mode Rejection Ratio ⁽¹⁾	DC, $V_{cm} = 0\text{V}$ to 4V	60	67		dB
Output Characteristics						
V_{OUT}	Output Voltage Swing	$R_L = 2\text{k}\Omega$	4.93	4.96 to 0.02	0.04	V
		$R_L = 10\text{k}\Omega$ ⁽¹⁾	4.97	4.99 to 0.01	0.02	V
I_{SC}	Short-Circuit Output Current	Sourcing, $V_{OUT} = 0\text{V}$, $G = 1$	30	69		mA
		Sinking, $V_{OUT} = 5\text{V}$, $G = 1$	80	150		mA

Notes:


1. 100% tested at 25°C




Typical Performance Characteristics - Continued

$T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $R_f = R_g = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.


Non-Inverting Freq. Resp. +5V

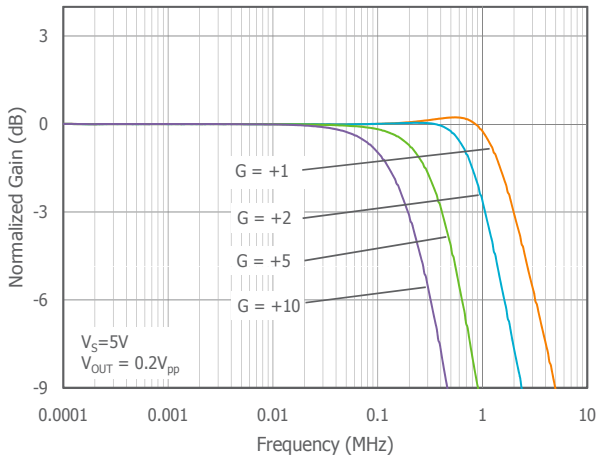


Non-Inverting Freq. Resp. +2.7V

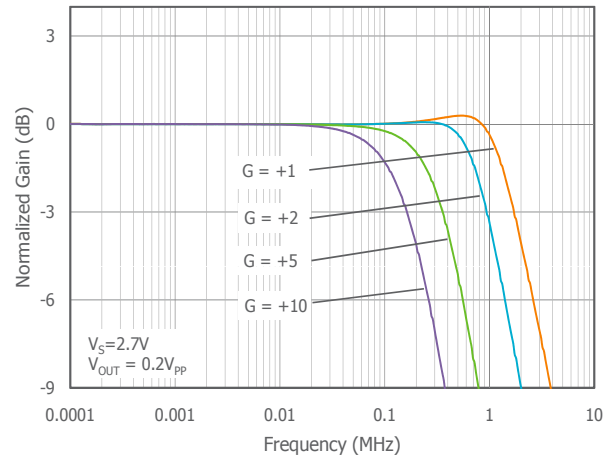


Inverting Freq. Resp. +5V

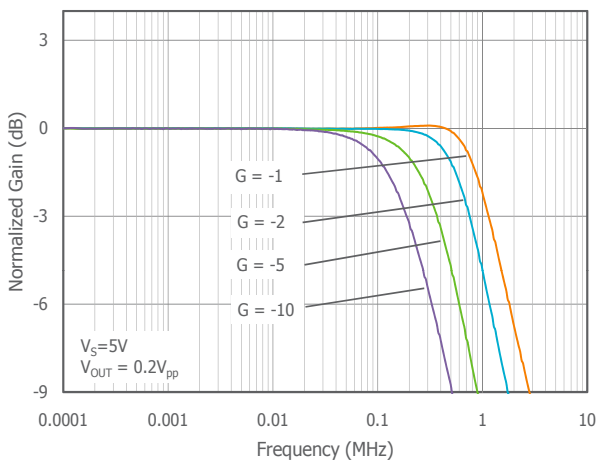


Inverting Freq. Resp. +2.7V

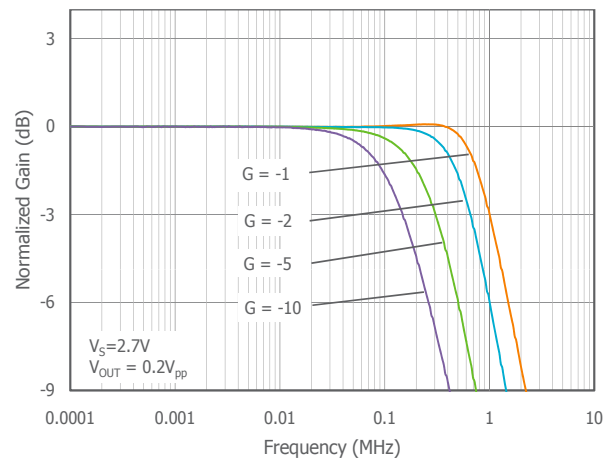


Freq. Resp. vs. C_L $R_L = 1\text{k}\Omega$ +5V

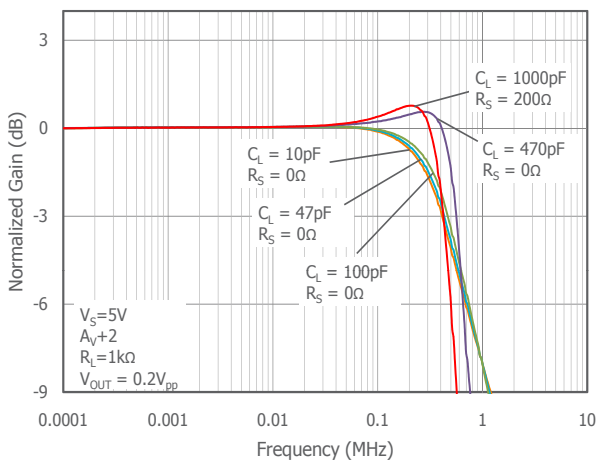







Freq. Resp. vs. C_L $R_L = 1\text{k}\Omega$ +2.7V

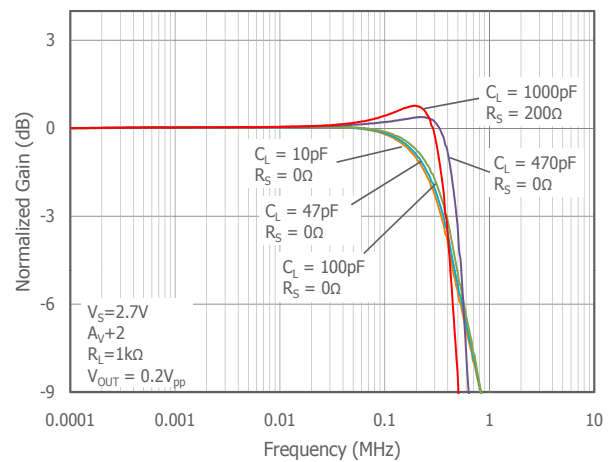




Typical Performance Characteristics - Continued

$T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $R_f = R_g = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.

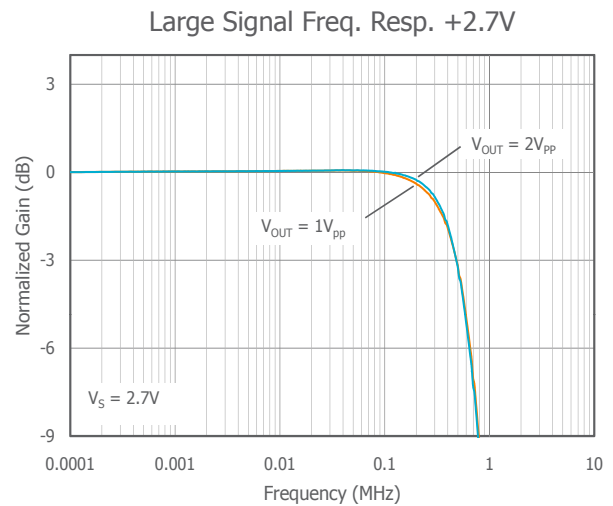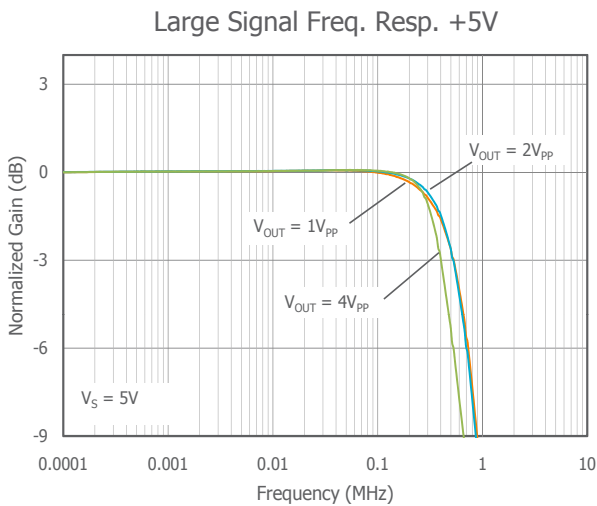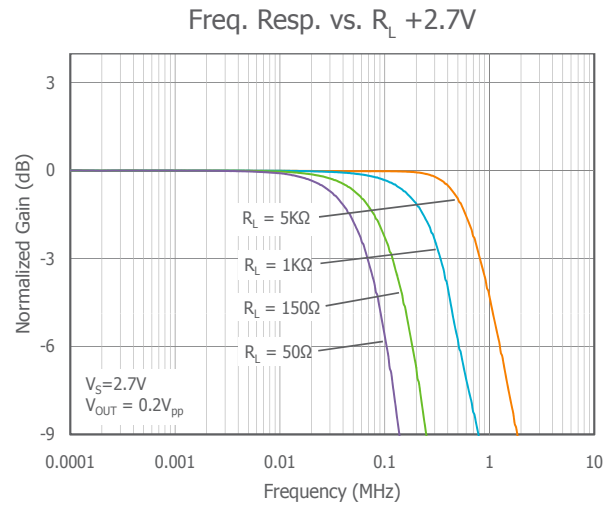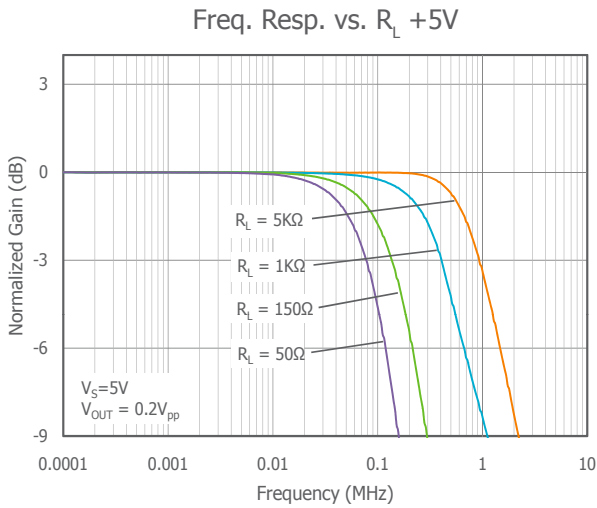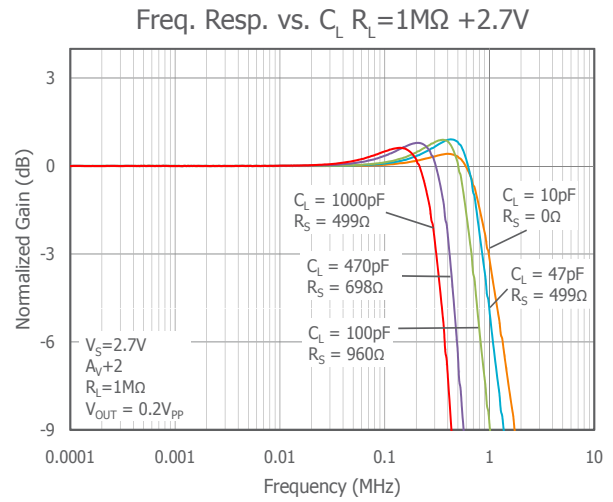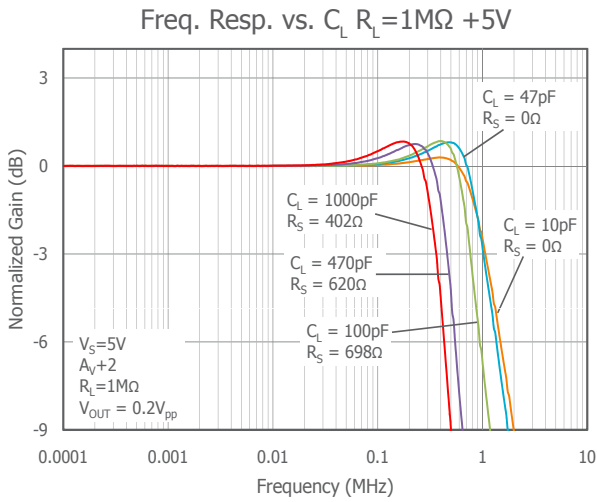




Typical Performance Characteristics - Continued


$T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $R_f = R_g = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.

CLC1020 General Purpose, Rail to Rail Output Amplifier Rev 1B


Open Loop Gain & Phase vs. Freq. +5V

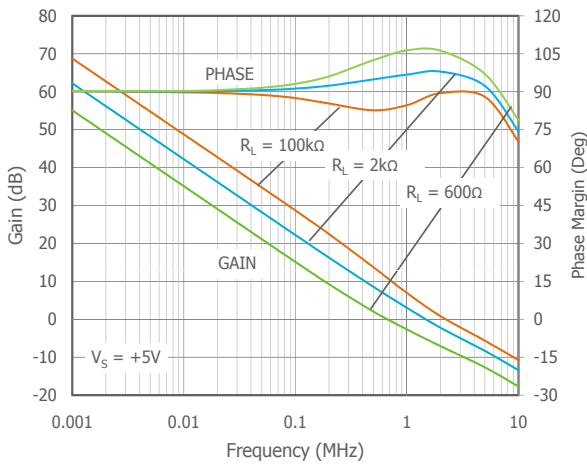


Open Loop Gain & Phase vs. Freq. +2.7V

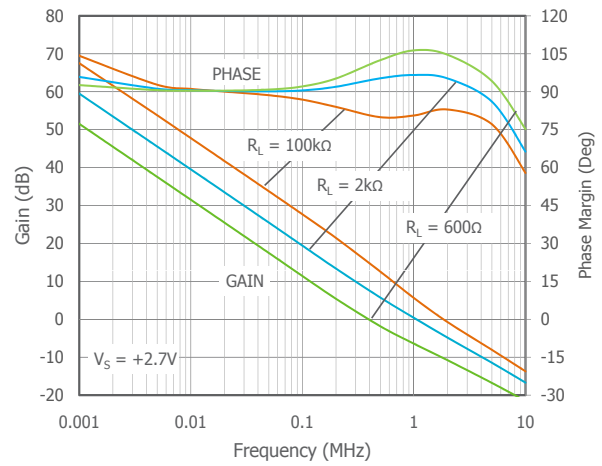


Open Loop Gain & Phase vs. Temp +5V

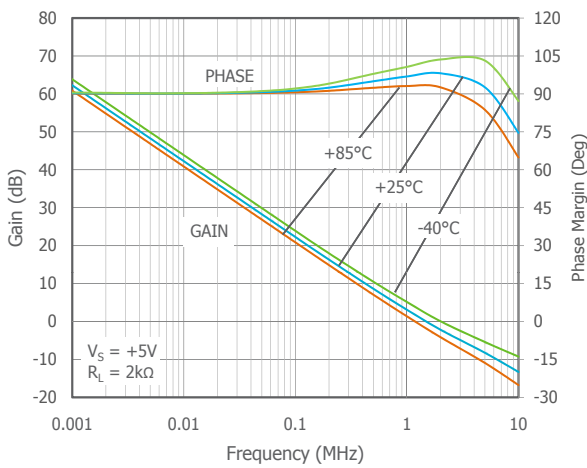


Slew Rate vs. Supply Voltage

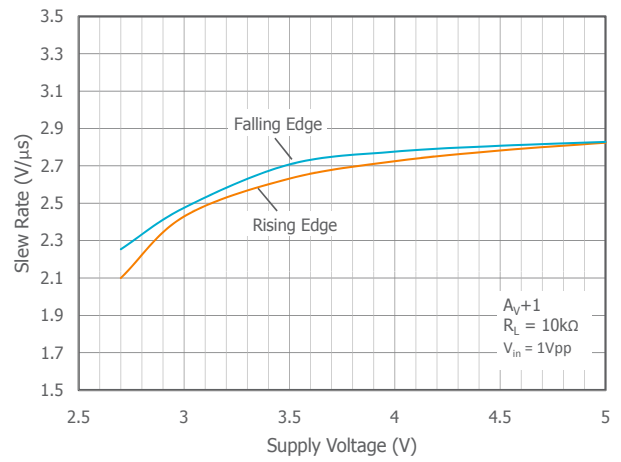

-3db BW vs Output Amplitude +5V

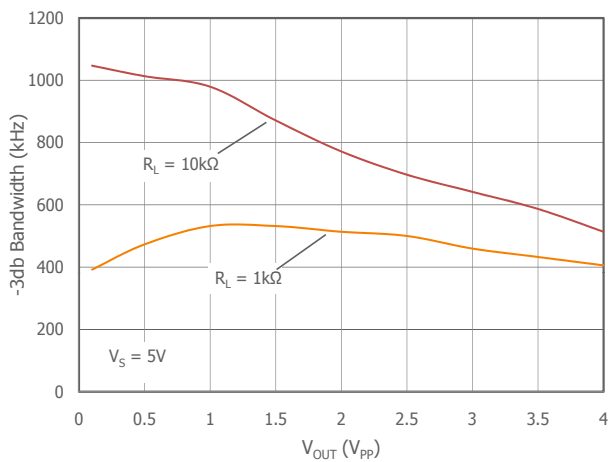

-3db BW vs Output Amplitude +2.7V

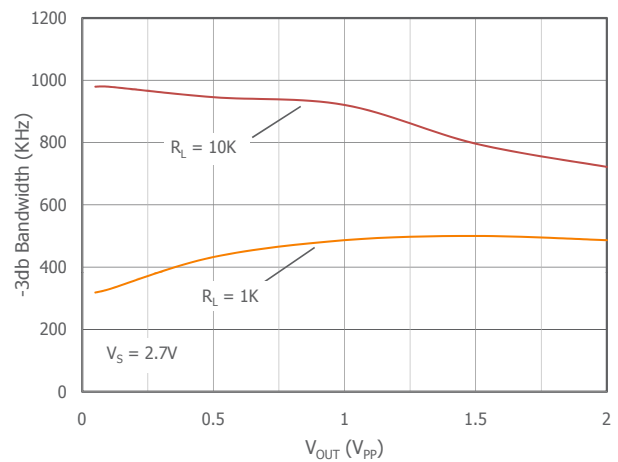





Typical Performance Characteristics - Continued

$T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $R_f = R_g = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.


CMRR vs. Freq.

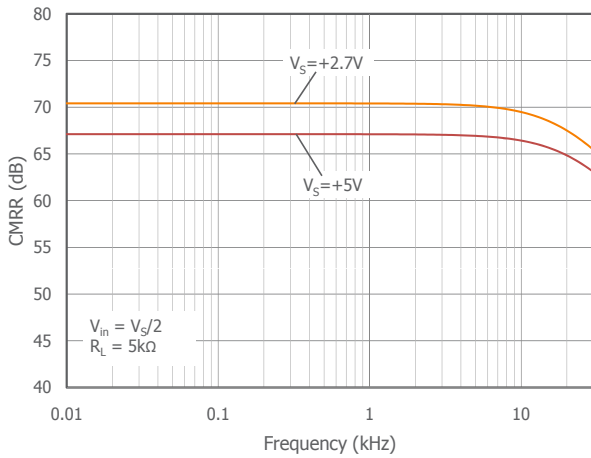


PSRR vs. Freq.

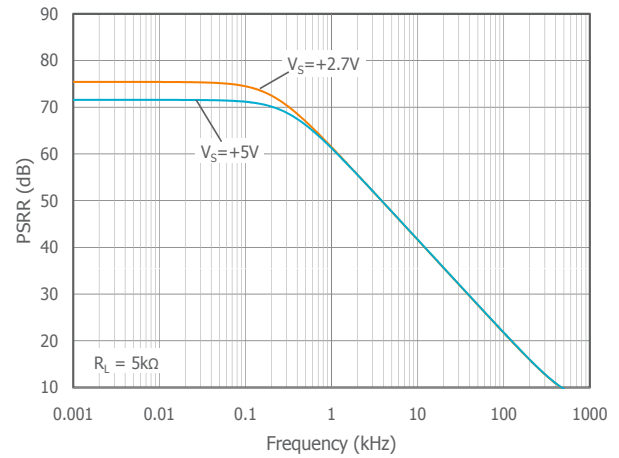


Input Voltage Noise vs. Freq.

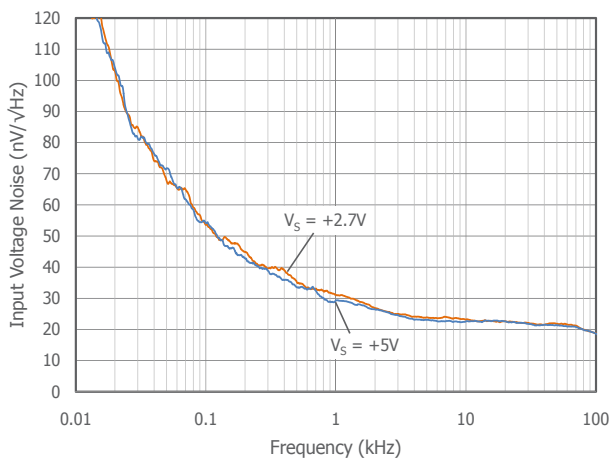


THD vs. Freq.

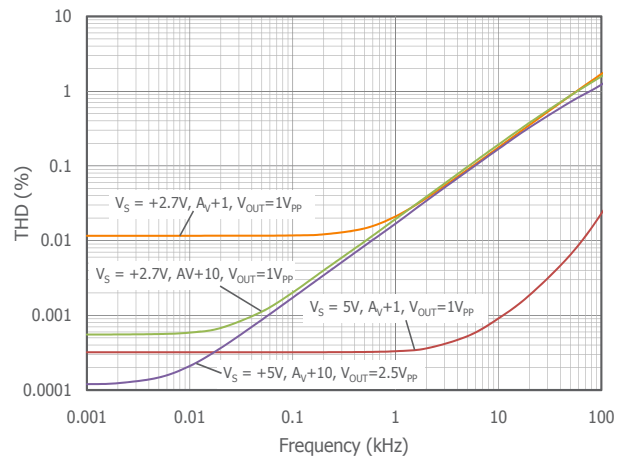

Output Impedance vs. Freq.

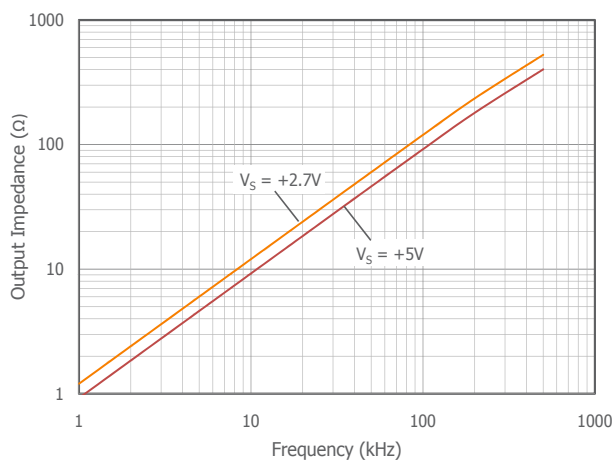

Large Signal Pulse Response

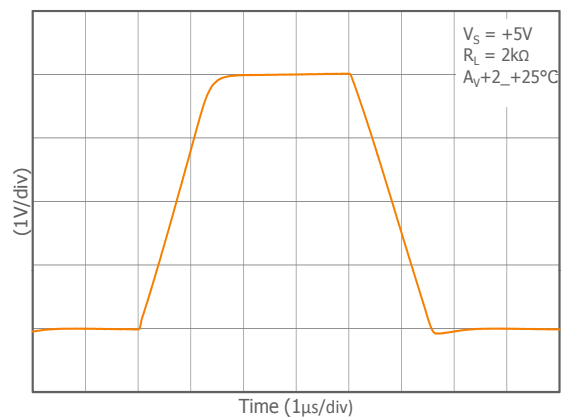





Typical Performance Characteristics - Continued

$T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $R_f = R_g = 10\text{k}\Omega$, $R_L = 10\text{k}\Omega$ to $V_S/2$, $G = 2$; unless otherwise noted.


V_{IO} vs. CMR +5V

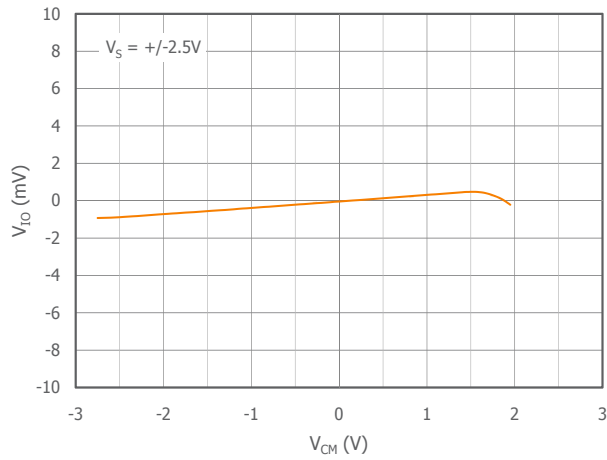


V_{IO} vs. CMR 2.7V

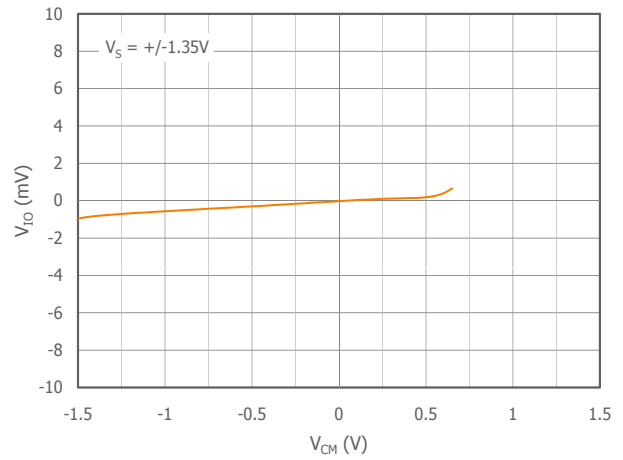


V_{IO} vs. Supply Voltage

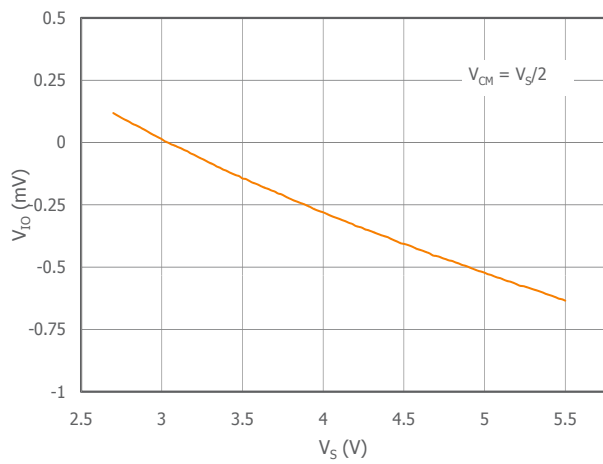


V_{OUT} vs. V_{CM} +5V

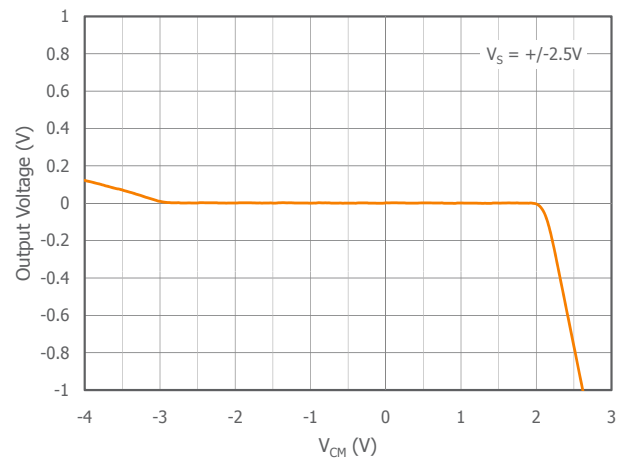

Output Swing vs. Supply Voltage

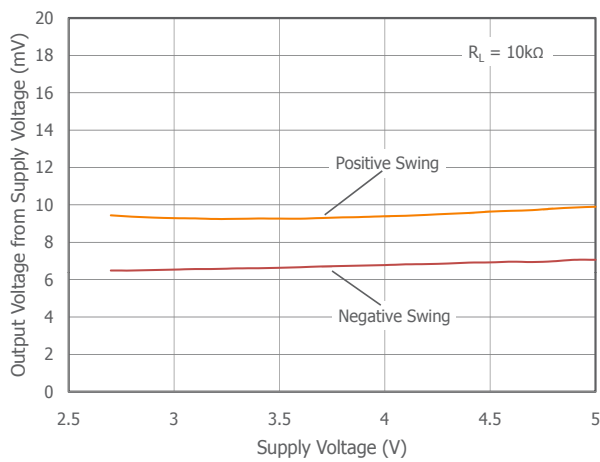

Input Current vs. Temperature

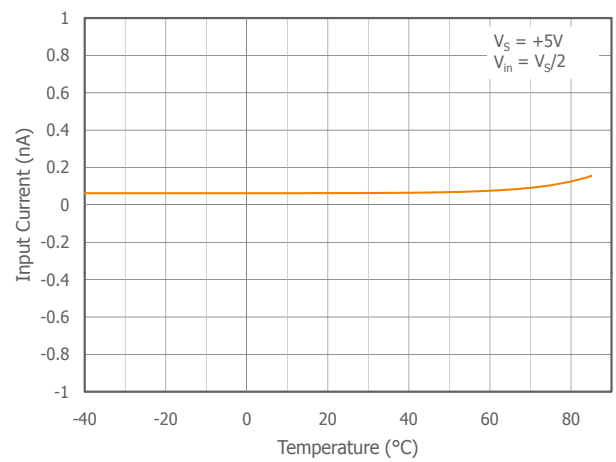



Application Information

General Description

The CLC1020 is a single supply, general purpose, voltage-feedback amplifier fabricated on a CMOS process. The CLC1020 offers 2.1MHz gain bandwidth product, 2.7V/μs slew rate, and only 127μA supply current. It features a rail to rail output stage and is unity gain stable.

The common mode input range extends to 400mV below ground and to 700mV below Vs. Exceeding these values will not cause phase reversal. However, if the input voltage exceeds the rails by more than 0.5V, the input ESD devices will begin to conduct. The output will stay at the rail during this overdrive condition.

The output stage is short circuit protected and offers "soft" saturation protection that improves recovery time. Figures 1, 2, and 3 illustrate typical circuit configurations for non-inverting, inverting, and unity gain topologies for dual supply applications. They show the recommended bypass capacitor values and overall closed loop gain equations. Figure 4 shows the typical non-inverting gain circuit for single supply applications

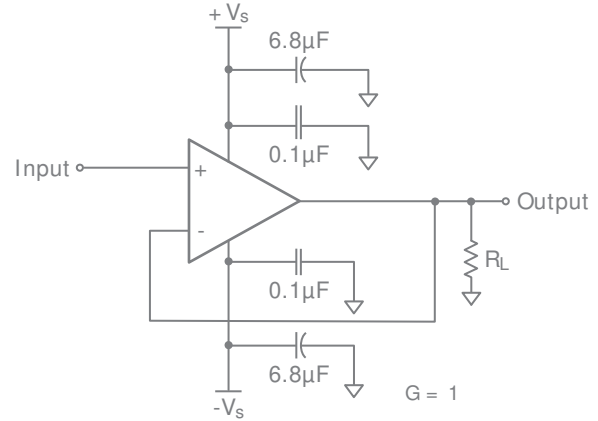


Figure 3. Unity Gain Circuit

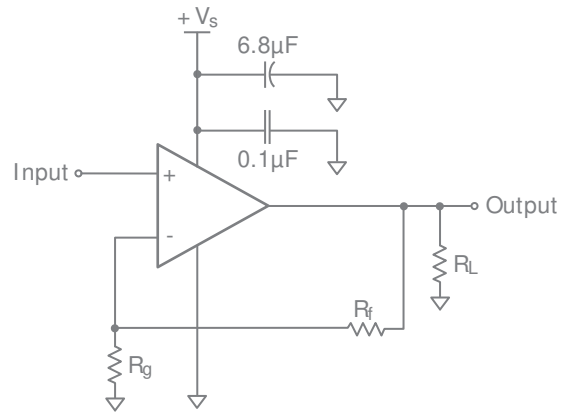


Figure 4. Single Supply Non-Inverting Gain Circuit

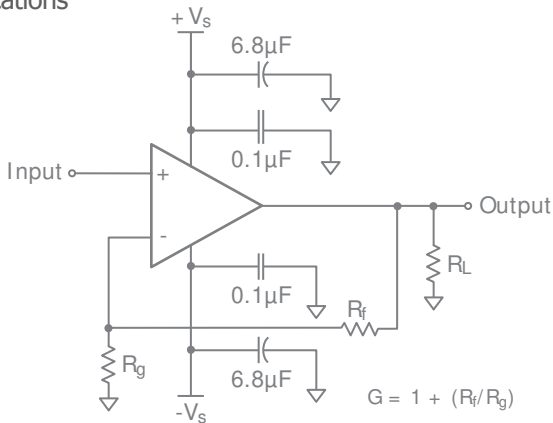


Figure 1. Typical Non-Inverting Gain Circuit

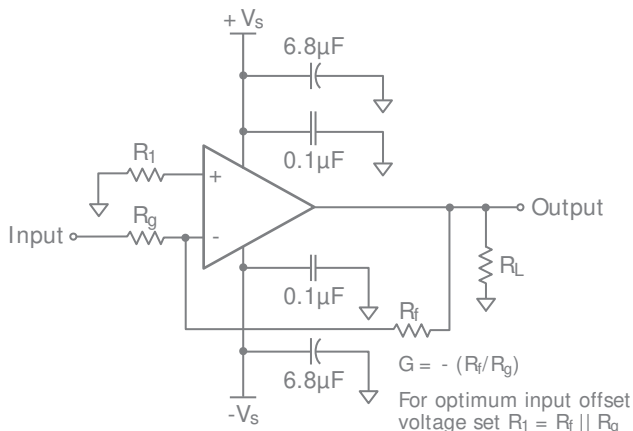


Figure 2. Typical Inverting Gain Circuit

Power Dissipation


Power dissipation should not be a factor when operating under the stated 2kΩ load condition. However, applications with low impedance, DC coupled loads should be analyzed to ensure that maximum allowed junction temperature is not exceeded. Guidelines listed below can be used to verify that the particular application will not cause the device to operate beyond its intended operating range.

Maximum power levels are set by the absolute maximum junction rating of 150°C. To calculate the junction temperature, the package thermal resistance value ThetaJA (ΘJA) is used along with the total die power dissipation.

$$T_{\text{Junction}} = T_{\text{Ambient}} + (\Theta_{\text{JA}} \times P_{\text{D}})$$

Where T_{Ambient} is the temperature of the working environment.

In order to determine P_{D} , the power dissipated in the load needs to be subtracted from the total power delivered by



the supplies.

$$P_D = P_{\text{supply}} - P_{\text{load}}$$

Supply power is calculated by the standard power equation.

$$P_{\text{supply}} = V_{\text{supply}} \times I_{\text{RMS supply}}$$

$$V_{\text{supply}} = V_{S+} - V_{S-}$$

Power delivered to a purely resistive load is:

$$P_{\text{load}} = ((V_{\text{LOAD}})_{\text{RMS}})^2 / R_{\text{load eff}}$$

The effective load resistor ($R_{\text{load eff}}$) will need to include the effect of the feedback network. For instance,

$R_{\text{load eff}}$ in Figure 3 would be calculated as:

$$R_L \parallel (R_f + R_g)$$

These measurements are basic and are relatively easy to perform with standard lab equipment. For design purposes however, prior knowledge of actual signal levels and load impedance is needed to determine the dissipated power. Here, P_D can be found from

$$P_D = P_{\text{Quiescent}} + P_{\text{Dynamic}} - P_{\text{Load}}$$

Quiescent power can be derived from the specified I_S values along with known supply voltage, V_{SUPPLY} . Load power can be calculated as above with the desired signal amplitudes using:

$$(V_{\text{LOAD}})_{\text{RMS}} = V_{\text{PEAK}} / \sqrt{2}$$

$$(I_{\text{LOAD}})_{\text{RMS}} = (V_{\text{LOAD}})_{\text{RMS}} / R_{\text{load eff}}$$

The dynamic power is focused primarily within the output stage driving the load. This value can be calculated as:

$$P_{\text{DYNAMIC}} = (V_{S+} - V_{\text{LOAD}})_{\text{RMS}} \times (I_{\text{LOAD}})_{\text{RMS}}$$

Assuming the load is referenced in the middle of the power rails or $V_{\text{supply}}/2$.

The CLC1020 is short circuit protected. However, this may not guarantee that the maximum junction temperature (+150°C) is not exceeded under all conditions.

Driving Capacitive Loads

Increased phase delay at the output due to capacitive loading can cause ringing, peaking in the frequency response, and possible unstable behavior. Use a series resistance, R_S , between the amplifier and the load to help improve stability and settling performance. Refer to Figure 5.

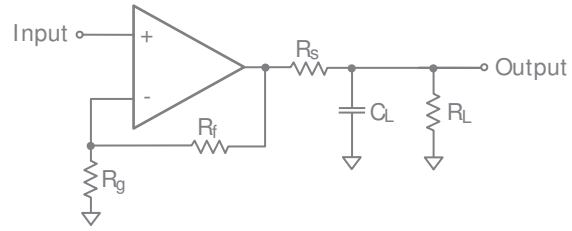


Figure 5. Addition of R_S for Driving Capacitive Loads

For a given load capacitance, adjust R_S to optimize the tradeoff between settling time and bandwidth. In general, reducing R_S will increase bandwidth at the expense of additional overshoot and ringing.

Overdrive Recovery

An overdrive condition is defined as the point when either one of the inputs or the output exceed their specified voltage range. Overdrive recovery is the time needed for the amplifier to return to its normal or linear operating point. The recovery time varies, based on whether the input or output is overdriven and by how much the range is exceeded. The CLC1020 will typically recover in less than 5 μ s from an overdrive condition. Figure 6 shows the CLC1020 in an overdriven condition.

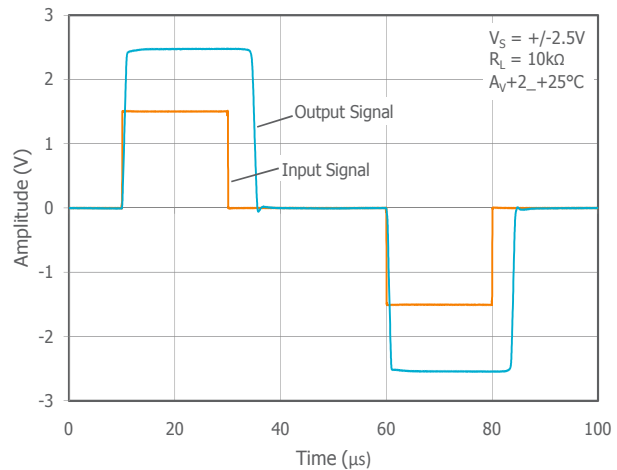


Figure 6. Overdrive Recovery

Layout Considerations

General layout and supply bypassing play major roles in high frequency performance. CADEKA has evaluation boards to use as a guide for high frequency layout and as an aid in device testing and characterization. Follow the steps below as a basis for high frequency layout:

- Include 6.8 μ F and 0.1 μ F ceramic capacitors for power



supply decoupling

- Place the 6.8μF capacitor within 0.75 inches of the power pin
- Place the 0.1μF capacitor within 0.1 inches of the power pin
- Remove the ground plane under and around the part, especially near the input and output pins to reduce parasitic capacitance
- Minimize all trace lengths to reduce series inductances

Evaluation Board Information

The following evaluation boards are available to aid in the testing and layout of these devices:

Evaluation Board	Products
CEB004	CLC1020 in TSOT

Evaluation Board Schematics

Evaluation board schematics and layouts are shown in Figures 7-11. These evaluation boards are built for dual supply operation. Follow these steps to use the board in a single-supply application:

1. Short -Vs to ground.
2. Use C3 (6.8μF) and C4 (0.1μF), if the -Vs pin of the amplifier is not directly connected to the ground plane.

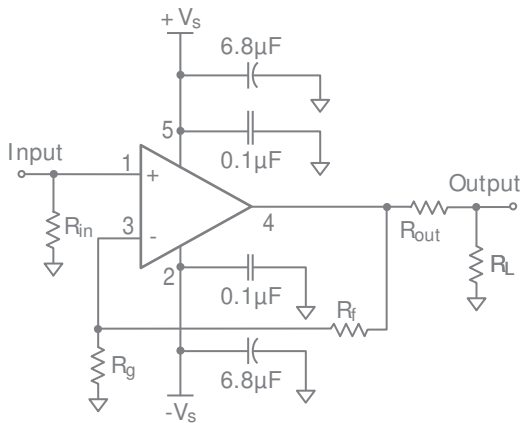


Figure 7. CEB004 Schematic

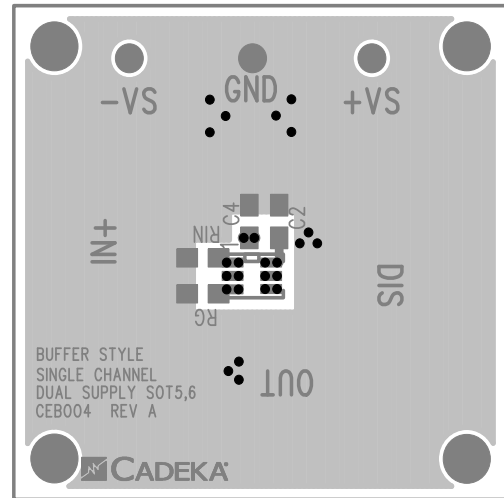


Figure 8. CEB004 Top View



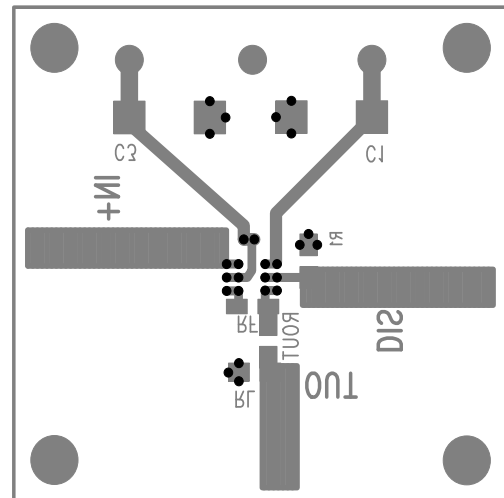


Figure 9. CEB004 Bottom View


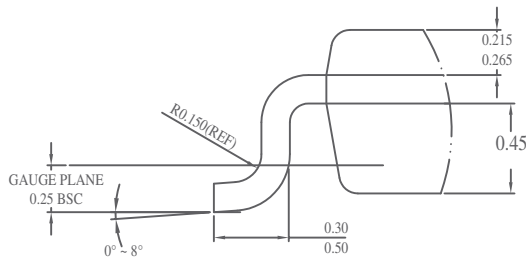


Mechanical Dimensions

TSOT-5 Package

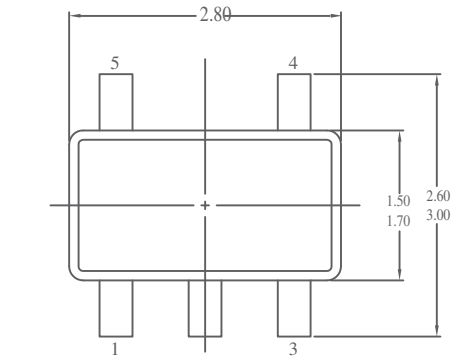

DETAIL "A"

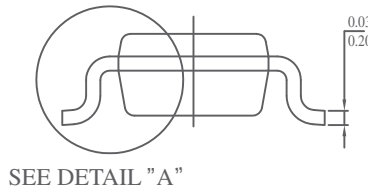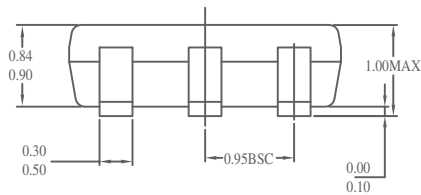

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. PACKAGE LENGTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION
3. PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION.
4. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.10 MILLIMETERS MAX.
5. DRAWING CONFORMS TO JEDEC MO-193, VARIATION AA.
6. DRAWING IS NOT TO SCALE.

For Further Assistance:

Exar Corporation Headquarters and Sales Offices

48720 Kato Road Tel.: +1 (510) 668-7000
 Fremont, CA 94538 - USA Fax: +1 (510) 668-7001
 www.exar.com

NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.

