



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Flat Cable Snap- Its (0443166651)



Part Number: 0443166651

43 FLAT CABLE CORE ASSEMBLY

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

Flat Cable Snap- Its for use on multi- conductor flat cables to suppress common- mode conducted EMI from 1MHz to hundreds of MHz. These Flat Cable Snap- Its are available in two ferrite materials, 31 and 43. The polypropylene cases are meeting the RoHS restrictions of hazardous substances and have a flammability rating of UL 94 V-0.

The Expanded Cable and Suppressor Kit (Part number 0199000005) contains several Flat Cable Snap- It assemblies.

Weight: 80 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	49.5	_	1.95	_
B	34.4	_	1.35	_
C	32.3	_	1.272	_
D	8.1	_	0.32	_

Cable Information			
Max Diameter	Max Dimension	Solid Equivalent	Flat Cable Cores
0	33.70 x 1.30	_	-
0			

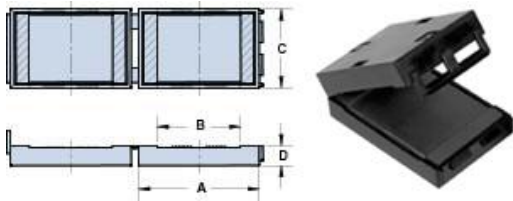


Chart Legend


+ Test frequency

Typical Impedance (Ω)	
10 MHz	60
25 MHz ⁺	110
100 MHz ⁺	290
250 MHz	435

Flat Cable Snap- It assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Centered, single turn impedance tests on the 31 and 43 material parts are performed on the 4193A Vector Impedance Analyzer. Cores are tested with the shortest practical wire length.

0443166651

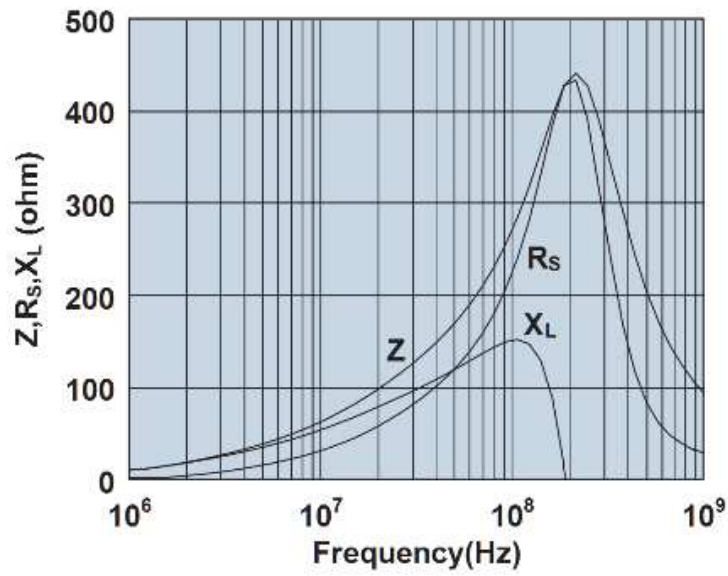

Impedance, reactance, and resistance vs. frequency.