

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

LTC2461: 16-BIT, Single-Ended, $\Delta\Sigma$ ADC WITH I²C INTERFACE

DESCRIPTION

Demonstration circuit 1491A features the LTC2461, a 16 bit high performance $\Delta\Sigma$ analog-to-digital converter (ADC) with an I²C interface. The input is single-ended with a range of 0 to REF. The modulator's proprietary sampling technique reduces the average input current to less than 50nA—orders of magnitude lower than typical delta sigma ADCs.


DC1491A is a member of Linear Technology's QuikEval family of demonstration boards. It is designed to allow easy evaluation of the LTC2461 and may be connected directly to the target application's analog signals while using the

DC590 USB Serial Controller board and supplied software to measure performance. The exposed ground planes allow proper grounding to prototype circuitry. After evaluating with Linear Technology's software, the digital signals can be connected to the end application's processor/controller for development of the serial interface.

Design files for this circuit board are available at www.linear.com/demo.

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

Figure 1. Proper Measurement Equipment Setup

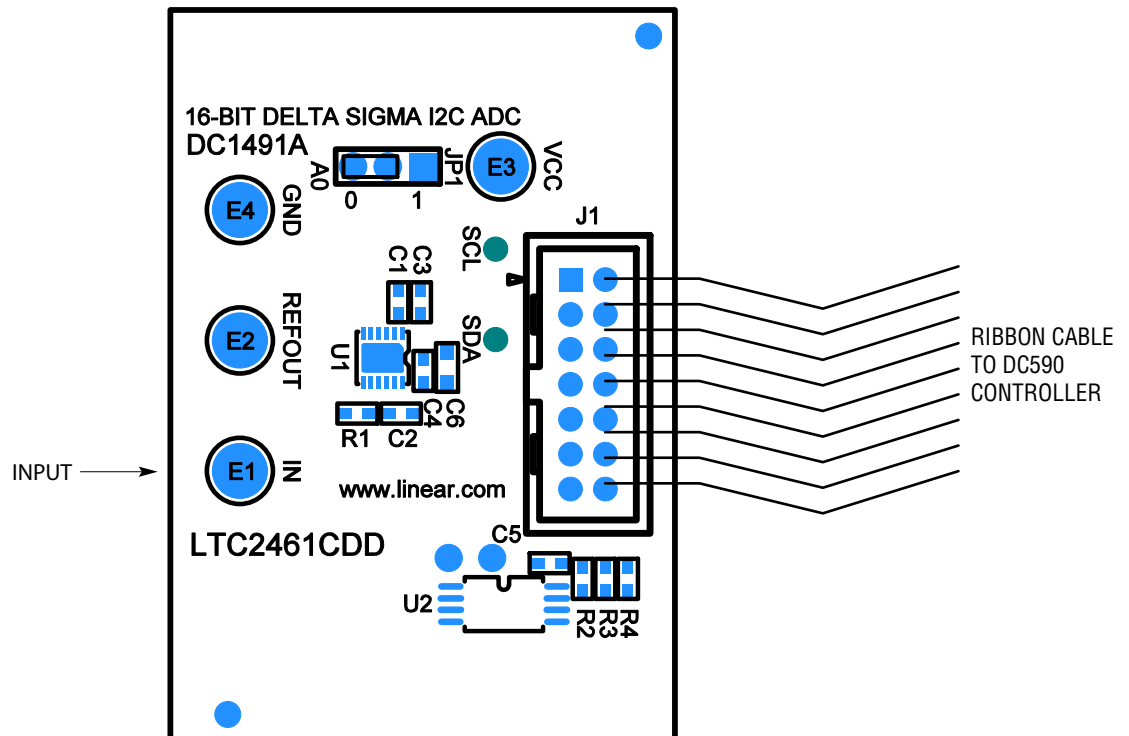


QUICK START PROCEDURE

Connect DC1491A to a DC590 USB Serial Controller using the supplied 14 conductor ribbon cable. Connect DC590 to host PC with a standard USB A/B cable. Run the evaluation software supplied with DC590 or downloaded from <http://www.linear.com/software>. The correct program will be loaded automatically. Click the COLLECT button to start

reading the input voltage. Details on software features are documented in the control panel's help menu.

Tools are available for logging data, changing reference voltage, changing the number of points in the strip chart and histogram, and changing the number of points averaged for the DVM display.

Figure 2. Software Screenshot

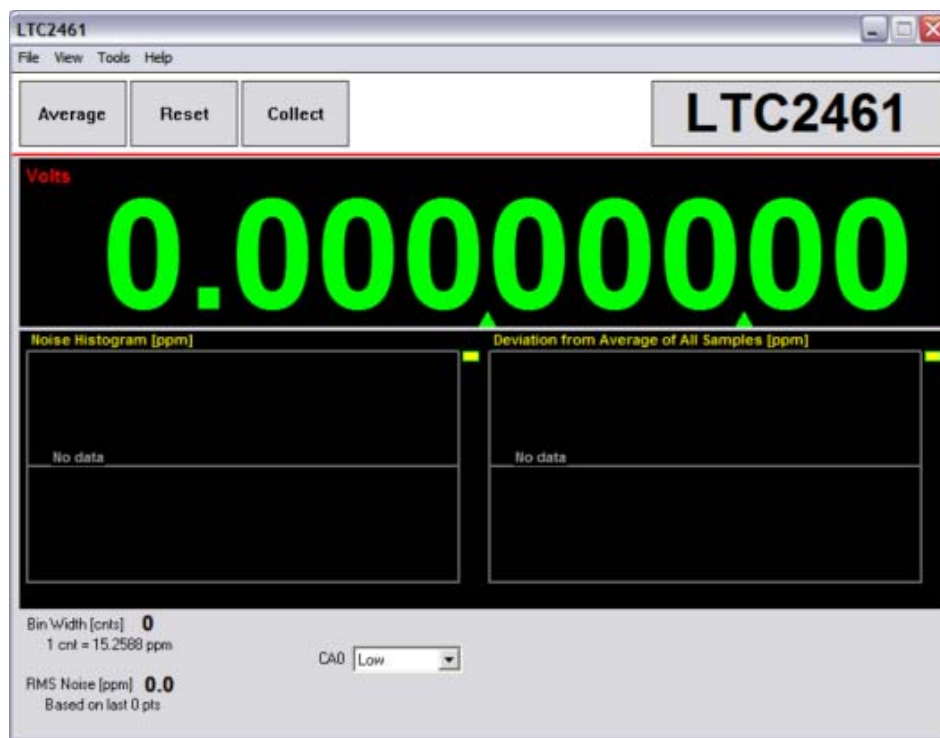

HARDWARE SET-UP

CONNECTION TO DC590 SERIAL CONTROLLER

J1 is the power and digital interface connector. Connect to DC590 serial controller with supplied 14 conductor ribbon cable.

ANALOG CONNECTIONS

Analog signal connections are made via the row of turret posts along the edge of the board. Also, when connecting the board to an existing circuit the exposed ground planes along the edges of the board may be used to form a solid connection between grounds.

GND: This turret is connected directly to the internal ground planes.

V_{CC}: This is the supply and reference voltage for the ADC. Do not draw any power from this point.

IN: This is the positive input to the ADC.

REFOUT: This turret is used as the reference voltage for the LTC2461.


PARTS LIST


ITEM	QUANTITY	REFERENCE-DESCRIPTION	DESCRIPTION	MANUFACTURER'S PART NUMBER
1	5	C1, C2, C3, C4,C5	CAP, 0402 0.1 μ F 20% 16V X7R	TDK C1005X7R1C104M
2	1	C6	CAP, 0603 10 μ F 10% 6.3V X5R	MURATA GRM188R60J106ME47D
3	4	E1, E2, E3, E4	TURRET	MILL MAX 2308-2
4	1	JP1	HEADER,3-PIN, 2mm	SAMTEC TMM-103-02-L-S
5	1	J1	HEADER, 2 \times 7 2mm	MOLEX 87331-1420
6	1	R1	RES, 0402 1k OHMS 5% 1/16W	VISHAY CRCW0402102JNED
7	3	R2, R3, R4	RES, 0402 4.99k OHMS 1% 1/16W	VISHAY CRCW04024K99FKED
8	1	U1	IC, 16-BIT DELTA SIGMA I ² C ADC WITH INTEGRATED PRECISION REFERENCE	LINEAR TECH. LTC2461CDD
9	1	U2	IC, IC SERIAL EEPROM 2k	MICROCHIP TECH. 24LC025-I/ST
10	1	JP1	SHUNT, 2mm	SAMTEC 2SN-BK-G

SCHEMATIC DIAGRAM
DEMO MANUAL DC1491A

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.
Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

REVISION HISTORY				
ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	10/09/08	
	2	ADDED HEADER TO PIN 3	06/11/09	

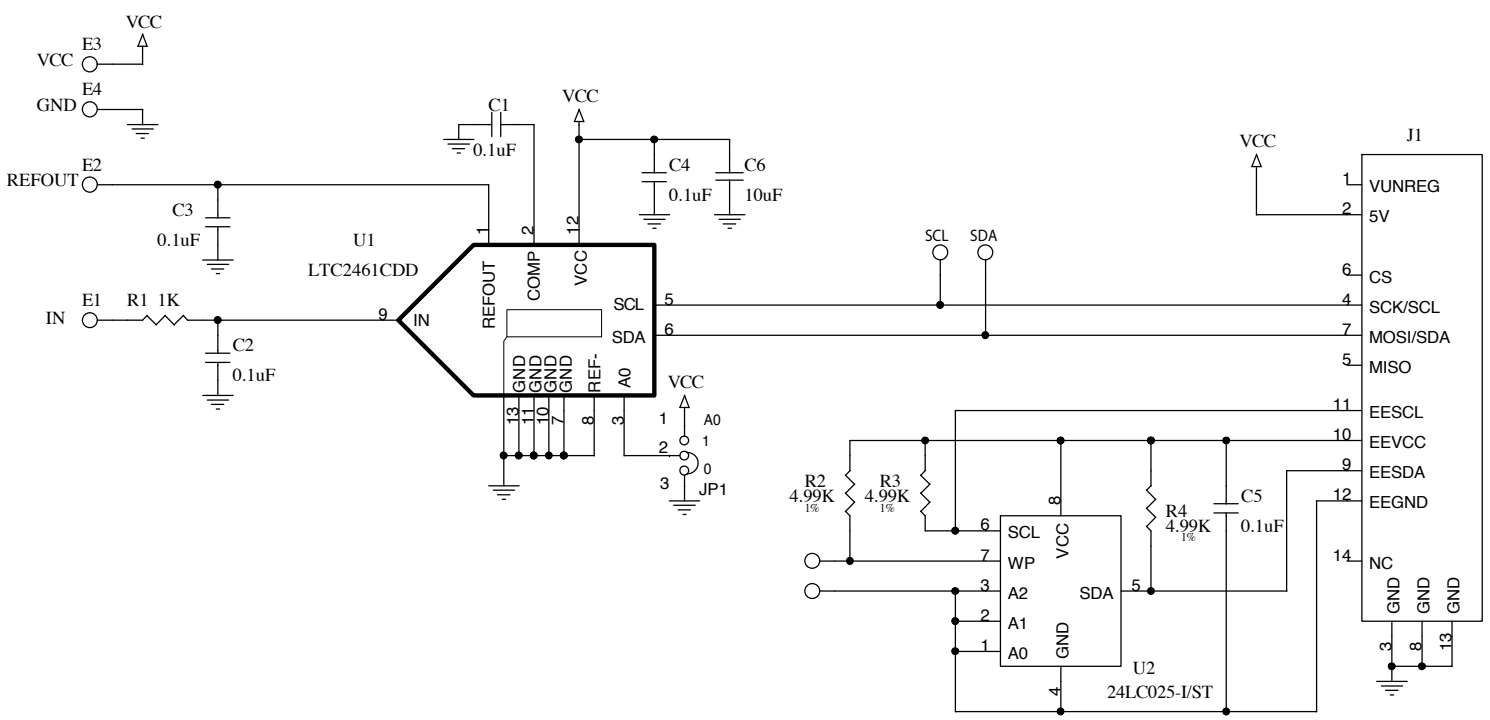

CONTRACT NO.		 1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408)432-1900 Fax: (408)434-0507	
APPROVALS	DATE		
DRAWN mi	10/09/08	TITLE	
CHECKED		SCH, LTC2461CDD, 16-BIT DELTA SIGMA I2C ADC	
APPROVED		SIZE	CAGE CODE
ENGINEER L.Chen		DWG NO	REV
DESIGNER		DC1491A	2
Thursday, June 11, 2009	SCALE:	FILENAME: 1491A-2.DSN	SHEET 1 OF 1

SCHEMATIC DIAGRAM

REVISIONS			
REV	DESCRIPTION	APPR	DATE
2	ADDED HEADER TO PIN 3, MOVED E2 AND JP1	LC	08/12/09

NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
 -FINISHED THICKNESS SHALL BE 1.6 +/- 0.1mm
 -TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
 -FLAMMABILITY RATING: 94 V-0 MINIMUM.
 0.00" ARE PRIMARY DATUMS.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
- DRILLING: DRILL HOLES PER SCHEDULE PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
 ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
 HOLE LOCATION TOLERANCES ARE +/-0.08mm IN RELATION TO CENTER
 -GOLD IMMERSION BOTH SIDES.
- FINISH: -SMORC USING LPI BOTH SIDES, COLOR GREEN.
 -FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK
 -DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
 PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS SHALL BE RoHS COMPLIANT.
- SCORING FOR PANELIZED PCB:

9. DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ON ANGLE ±1°
 .XX ± 0.25
 .XXX ± 0.127

1. FAB PER IPC-A-600

2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
 -FINISHED THICKNESS SHALL BE 1.6 +/- 0.1mm
 -TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
 -FLAMMABILITY RATING: 94 V-0 MINIMUM.
 0.00" ARE PRIMARY DATUMS.

3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.

4. DRILLING: DRILL HOLES PER SCHEDULE PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
 ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
 HOLE LOCATION TOLERANCES ARE +/-0.08mm IN RELATION TO CENTER
 -GOLD IMMERSION BOTH SIDES.

5. FINISH: -SMORC USING LPI BOTH SIDES, COLOR GREEN.
 -FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK
 -DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
 PAD SIZE CAN BE MODIFIED TO MEET END FINISH.

7. PCBS SHALL BE RoHS COMPLIANT.

8. SCORING FOR PANELIZED PCB:

9. DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ON ANGLE ±1°
 .XX ± 0.25
 .XXX ± 0.127

LAYER CONSTRUCTION

SIZE	QTY	SYM	PLATED	TOL
0.25	54	+	YES	+/-0.08
0.9	21	X	YES	+/-0.08
1.6	4	□	YES	+/-0.13
1.8	2	⊗	NO	+/-0.13

APPROVALS

DRAWN	INITIAL	DATE
CHECK		
DESIGN	MI	10/09/08
ENGR	LC	08/12/09

1650 MCCARTHY BLVD
 WILMINGTON, MA 01898
 TEL: (508) 334-1000
 FAX: (508) 334-1001
 LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY

LINEAR
 TECHNOLOGY

TITLE: FABRICATION DRAWING: LTC2461CDD,
 16-BIT DELTA SIGMA 12C ADC

SIZE: DEMO
 DC1491A


REV: 2

SCALE = NONE


SHT 1 of 1

PCB LAYOUT AND FILM


Top Silkscreen

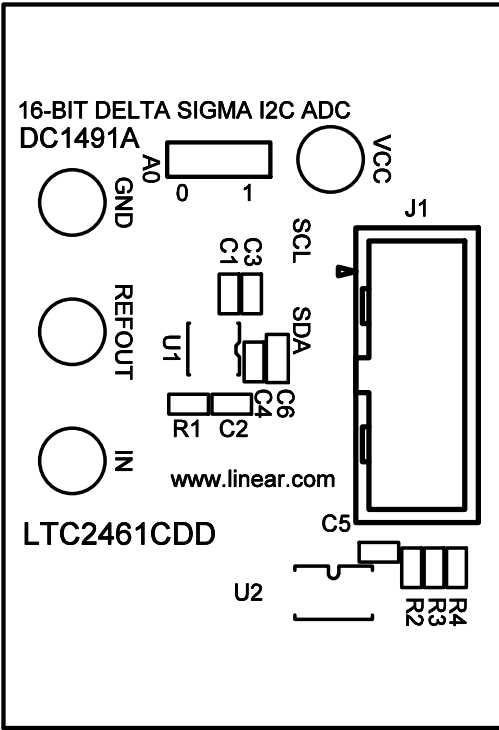


Top Paste

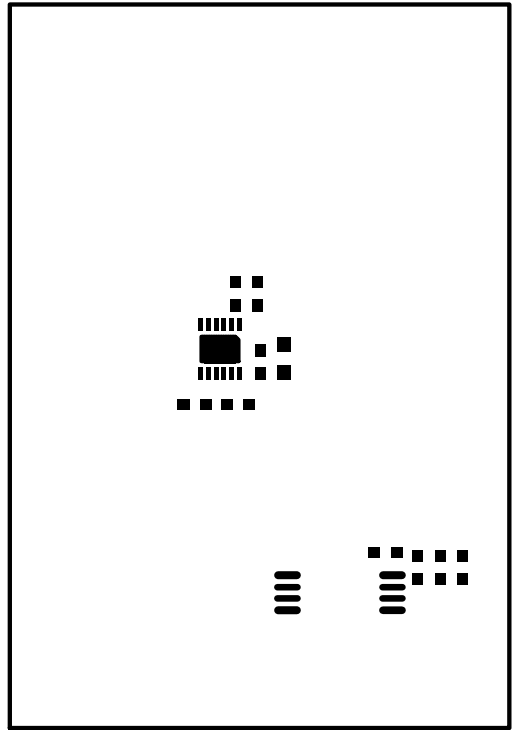

Top Soldermask

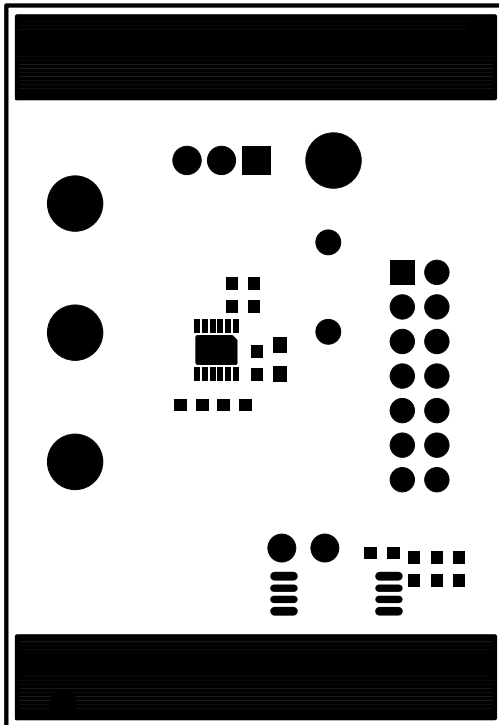


L1 Component Side

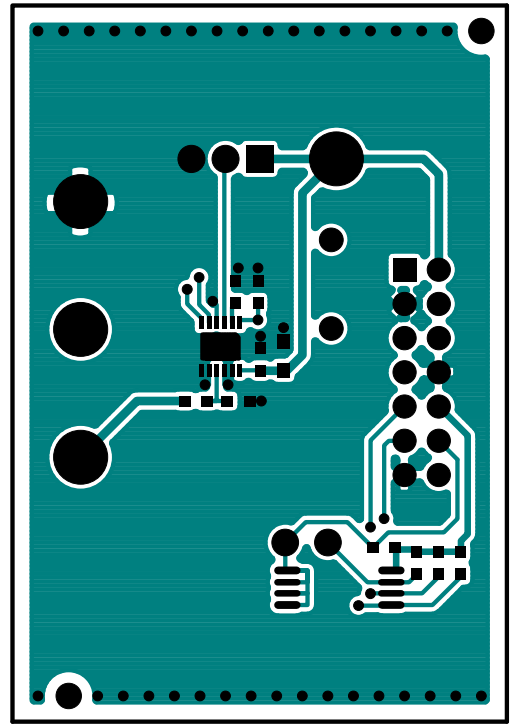


PCB LAYOUT AND FILM


Top Silkscreen

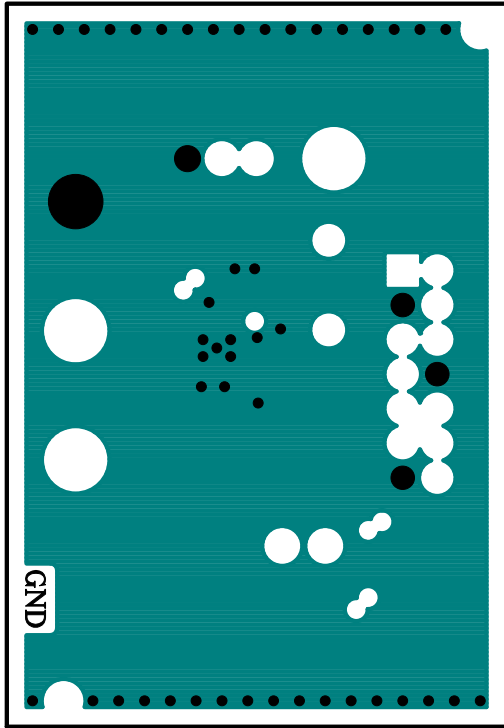


Top Paste

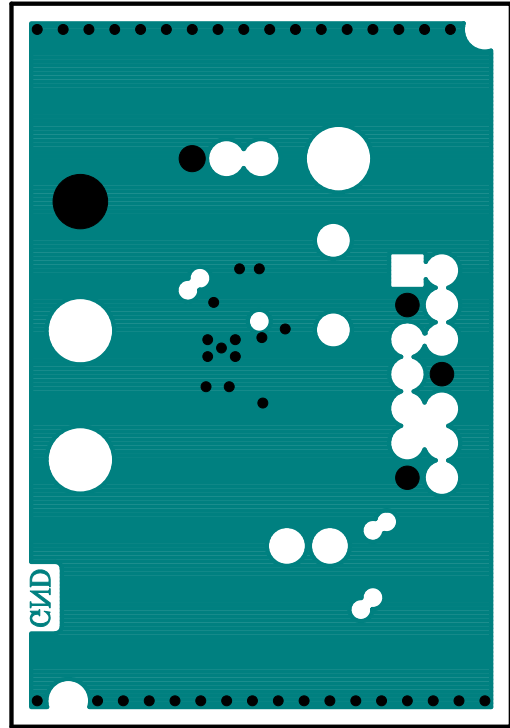

Top Soldermask

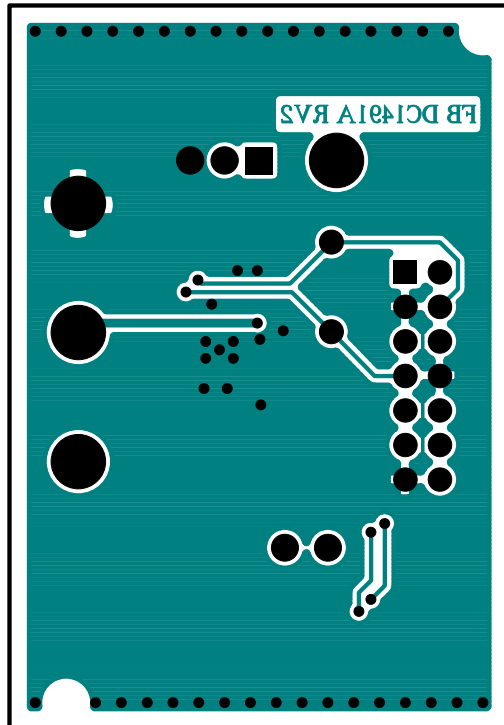

L1 Component Side

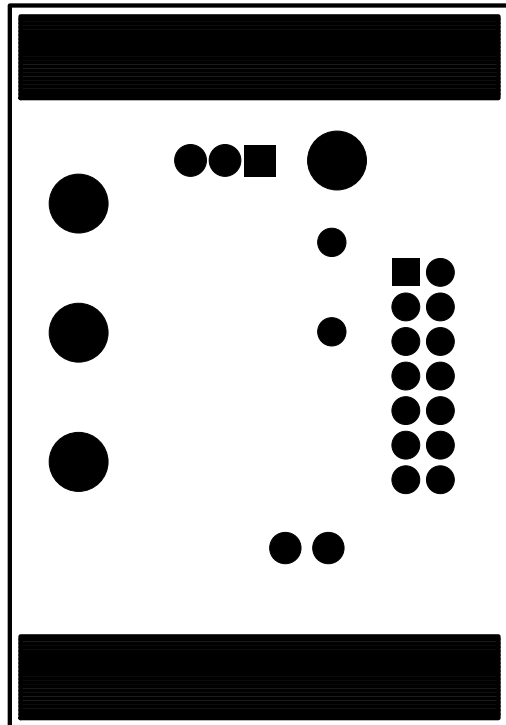

DEMO MANUAL DC1491A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation