



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



18B20 Temperature Sensor V2 SKU: DFR0024



From Robot Wiki

Contents

- [1 Introduction](#)
- [2 Specification](#)
- [3 Connection Diagram](#)
- [4 Sample Code](#)

Introduction


DS18B20 is a digital temperature sensor which is from DALLAS U.S. It can be used to quantify the environmental temperature testing.

The temperature range $-55 \sim +125$ °C, the inherent temperature resolution of 0.5 °C, support multi-point networking mesh. Three DS18B20 can be deployed on three lines, to achieve multi-point temperature measurement. It has a 9-12 bit serial output.

Specification

- Supply Voltage: 3.3V to 5V
- Temperature range : -55 °C \sim $+125$ °C
- Interface: Digital
- Size: 22x32mm

Connection Diagram

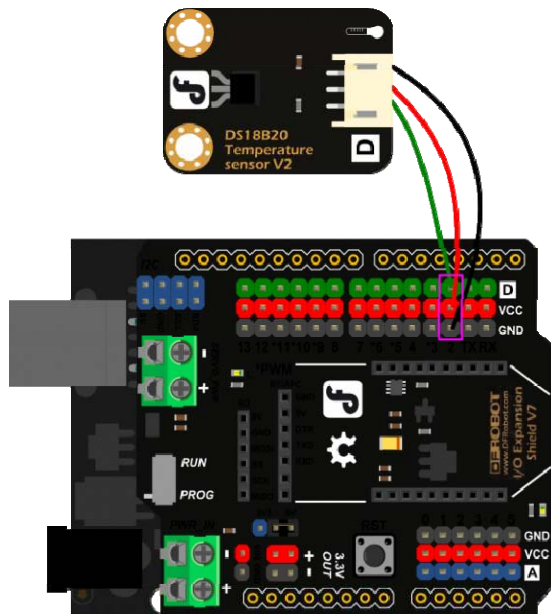

Sample Code

```
#include <OneWire.h>

int DS18S20_Pin = 2; //DS18S20 Signal pin on digital 2

//Temperature chip i/o
OneWire ds(DS18S20_Pin); // on digital pin 2

void setup(void) {
  Serial.begin(9600);
}

void loop(void) {
```

```
float temperature = getTemp();
Serial.println(temperature);

delay(100); //just here to slow down the output so it is easier to read
}

float getTemp(){
    //returns the temperature from one DS18S20 in DEG Celsius

    byte data[12];
    byte addr[8];

    if ( !ds.search(addr)) {
        //no more sensors on chain, reset search
        ds.reset_search();
        return -1000;
    }

    if ( OneWire::crc8( addr, 7) != addr[7]) {
        Serial.println("CRC is not valid!");
        return -1000;
    }

    if ( addr[0] != 0x10 && addr[0] != 0x28) {
        Serial.print("Device is not recognized");
        return -1000;
    }

    ds.reset();
    ds.select(addr);
    ds.write(0x44,1); // start conversion, with parasite power on at the end
```

```
byte present = ds.reset();
ds.select(addr);
ds.write(0xBE); // Read Scratchpad

for (int i = 0; i < 9; i++) { // we need 9 bytes
  data[i] = ds.read();
}

ds.reset_search();

byte MSB = data[1];
byte LSB = data[0];

float tempRead = ((MSB << 8) | LSB); //using two's compliment
float TemperatureSum = tempRead / 16;

return TemperatureSum;
```

```
}
```