

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LED Current Meter 50A(SKU:DFR0245)

From Robot Wiki



Introduction

LED Current Meter 50A

This is a standard LED Current Meter 50A. The biggest feature is that the LED Current Meter has reversed connection protection to prevent from being burnt out. It measures 0-50A with 2% accuracy. Best suitable for current display in the circuit. Just apply four wires without any extra circuit or components, it gives the reading straight away. Easy to use, and good company with robot application. It has three colors to select, green/red.


Warnings: Please carefully follow the instructions for wiring. The power supply terminal and measurement terminal of this LED Current Meter are used common-ground connect. So, the measurement terminal of current meter must be cascaded after load. It's better that power supply of the current meter is isolated. And before using the current meter, you must be connect the shunt firstly for fear that the current meter is burnt out by high voltage.

Specification

- Measure Current: 0-50A DC
- Power supply voltage: 4-30V DC
- Display mode: 3-bit 0.56 Led digital tube
- Accuracy:2%
- Opening dimension: 45.5mm*26.5mm
- Dimension: 48mm*29mm*21mm
- weight: 23g(current meter)+60g(shunt)

Connection Diagram


Connection Diagram 1:

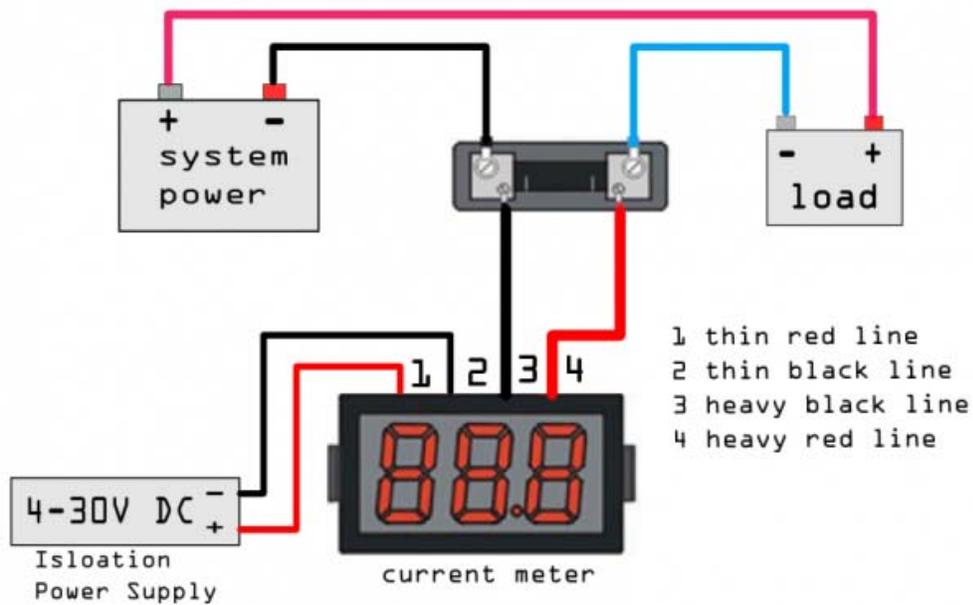

Use Isolation Power Supply
Connection Diagram

Connection Diagram 3

Connection Diagram 2:

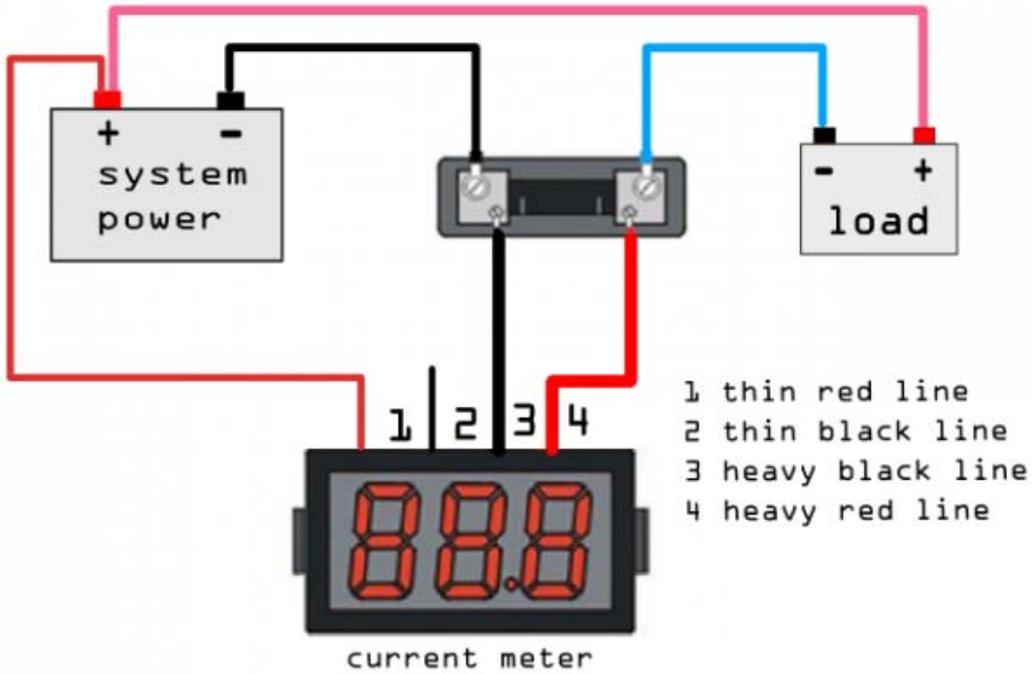

Power supply of current meter
from measurement system

Connection Diagram 4

[LED Current Meter 50A\(Green\)\(SKU:DFR0245-G\)](#)

[LED Current Meter 50A\(Red\)\(SKU:DFR0245-R\)](#)