



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Speech Synthesis Shield SKU:DFR0273

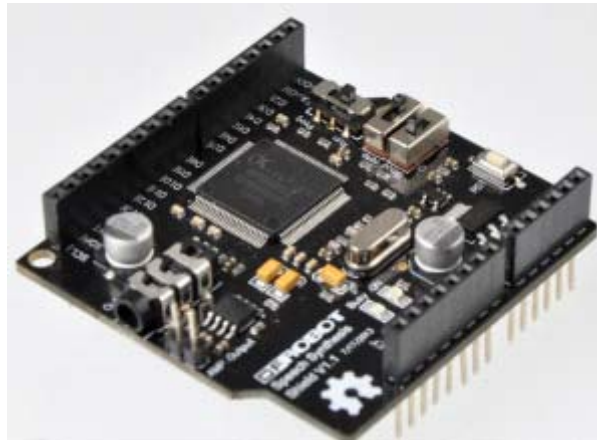


Introduction

Do you want your robot speak up? Or did your plants ever mentioned they are thirsty? The Speech Synthesis Shield for Arduino makes it easy come true. It is time to give a voice to your robots and projects. The Speech Synthesis Shield is designed to be easily stacked upon any standard Arduinos. It uses a XFS5051CE speech synthesis chip from IFLYTEK which combines world leading technology and high degree of integration. Languages such as Chinese and English are both supported, dialects such as Cantonese and mixed speech are also functional with this module. It is very funny to make a weather forecast with broadcast voice. It is using UART communication to make it widely compatible with most controller boards.

Specification

- Baud rate : 4800,9600,57600,115200
- A busy indicator LED
- A power indicator LED
- Voltage:+5V
- Size:56*53mm
- Weight: 26 gram
- 11 levels of speaking speed
- Be able to speak Chinese
- Be able to speak English
- Both male and female voice supported
- **Use the Serial ports of your Arduinos only**

Get Started

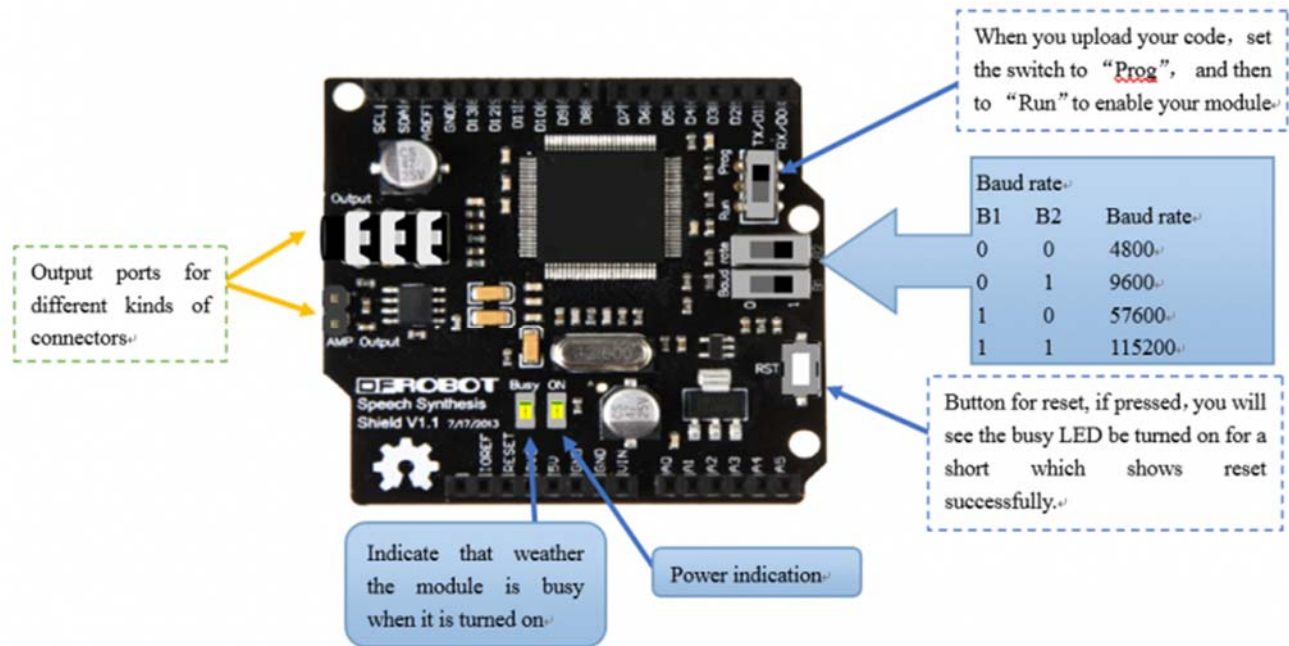

Speech Synthesis Shield

Please press RST button on the controller board after uploaded the sketch, or it will affect the normal use.

Remember the "RST" button on the speech shield is only the speech synthesis chip. The busy led will be light once, when you press "RST".

Sample Code

```
#include <SpeechSynthesis.h>

void setup()

{
    Serial.begin(9600);
}

byte ssr[500]; //define a character string
void loop()
{
    SpeechSynthesis.buf_init(ssr); //Clear the buffer
    SpeechSynthesis.English(ssr, 4, "5"); //volume in grade 5
    SpeechSynthesis.English(ssr, 6, "cooki"); // "6" means synthesis in English; "cooki" is the content
    SpeechSynthesis.English(ssr, 4, "5");
    SpeechSynthesis.English(ssr, 6, "cooki Clock, reset and supply management");
    SpeechSynthesis.English(ssr, 2, "10");
    SpeechSynthesis.English(ssr, 6, "cooki Clock, reset and supply management");
    SpeechSynthesis.English(ssr, 2, "5"); //speed of speaking: grade 5
    SpeechSynthesis.English(ssr, 5, " "); //speed, volume, intonation are all set into default
    SpeechSynthesis.English(ssr, 6, "cooki Clock, reset and supply management");
    SpeechSynthesis.Espeaking(0, 19, 4, ssr); //Executive commands above, "0" is synthesis command; "19" select speaker; "4" speech function

    while(Serial.read() != 0x41) //waiting synthesis complete
    {}

    while(Serial.read() != 0x4F) //waiting play complete
    {}

    SpeechSynthesis.buf_init(ssr);
    SpeechSynthesis.English(ssr, 6, "hello cooki 123");
    SpeechSynthesis.Espeaking(0, 19, 4, ssr);

    while(Serial.read() != 0x41)
    {}

    while(Serial.read() != 0x4F)
```

```

    {}
    SpeechSynthesis.buf_init(ssr);
    SpeechSynthesis.English(ssr,6,"hello cooki 123");
    SpeechSynthesis.Espeaking(0,19,7,ssr);

    while(1);

}

```

Commands List with Library V2

Here is the **NEW Speech Synthesis library V2**, it fixed some bugs about the number synthesis.

A complete command is composed by three sections: **Initialization Function**, **Speech Synthesis Function** and **Execute Function**.

Initialization Function

```
SpeechSynthesis.buf_init(ssr);
```

It will clear all buffer on your board, and initialize chip setting.

Speech Synthesis Function

SpeechSynthesis.English(char sr[],byte cmd,char a[]);

Description :

- 1、 char sr[] -->the content which will be read by the module
- 2、 byte cmd -->the command which will be sent to the module
- 3、 char a[] -->the content

Value of the command	Meaning	Example
0		
1	Mute	Can mute for at longest 268s , the unit is ms
2	Speed of speaking	11 grades of the speed and 5 is the default, 10is the fastest and 0 is the slowest
3	Volume Controlling	11 grades of the volume and 5 is the default, 10 is the largest volume and 0 is the smallest
4	Volume Controlling	The same as “3”, but a short delay will happen when read “#” or “*”
5	Return to default	The speed, volume and the synthesis will be reset to default value
6	English Synthesis	

Speech Synthesis Shield

For Example :

```
SpeechSynthesis.English(ssr,4,"5");           //volume in grade 5
SpeechSynthesis.English(ssr,6,"cooki");       //"6" means synthesis in English;
"cooki" is the content
```

Execute Function

SpeechSynthesisClass::Espeaking(byte cmda ,byte cmdb,byte cmdc,char c[])

Description :

- 1、char cmda-->Working mode
- 2、byte cmdb-->Select speaker
- 3、char cmdc-->Speaking Command format
- 4、char c[] -->the content

For Example :

SpeechSynthesis.Espeaking(0,19,4,ssr); //"0" means command (speech synthesis command);"19" means the choice who to speak;"4" means the format of reading;"ssr" store the content.

char cmda

```
/*parameter value*/ meaning
/*0*/ Speech Synthesis Command
/*1*/ Stop Speech Synthesis Command
/*2*/ Pause Speech Synthesis Command
/*3*/ Resume Speech Synthesis Command
/*4*/ Check Status
/*5*/ Enter power-save mode
```

byte cmdb

```
/*parameter value*/ meaning
/*0*/Men Voice : "I am XuJiu"
/*1*/Men Voice : "I am XuDuo"
/*2*/Women Voice : "I am XiaoPin"
/*3*/Donald Duck Voice : "I am a Duck"
/*4*/Girls Voice : "I am a girl"
/*5*/Yong Woman Voice : "I am XuDuo"
/*6*/Men Voice : "I am John" (English Only)
/*7*/Women Voice : "I am Terry" (English Only)
/*8*/Women Voice : "I am Catherine" (English Only)
/*9*/~/*16*/ Chinese Dialect(If you are interested in this, you could try it one by one, it is very funny!)
/*17*/Boys Voice : "I am John"
/*18*/Girls Voice : "I am Lina"
/*19*/Women Voice : "I am Robot"
```

char cmdc

/*parameter value*/ meaning

/*4*/123km Synthesised as : “one hundred and twenty three kilometres”

/*6*/Words“you” Synthesised as : “y-o-u”

/*7*/Words“you” Synthesised as : “you”