



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





LCD12864 Shield SKU:DFR0287




Introduction

This framed LCD12864 Shield with LED backlight is compatible with most of Arduino controllers and supports English/Chinese/Picture display. With 5 analog extension pins and 8 digital pins, the LCD12864 Shield also integrates a 5-key joystick for controlling additional functions, making it an ideal module for prototyping and interactive projects.

Specification

- Power supply: 3.3V
- Pin used: D7, D8, D9, D10, D11, D13, A0
- Reset button
- 5 degree joystick (using Arduino Analog Pin 0)
- Backlit control (using Arduino Digital Pin 7)
- Extra 5 Analog pins & 8 Digital pins
- Size:60x55x20mm

Pin Out

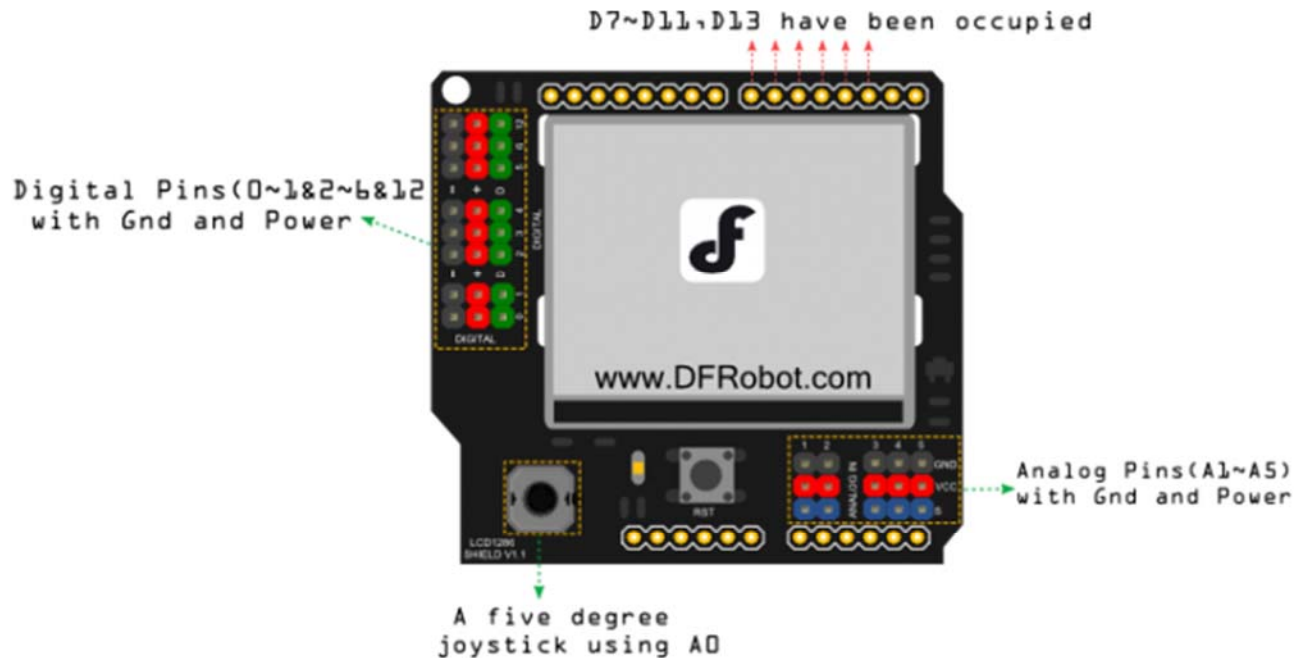

Instruction for Digital Pin 7 To 11,13 and Analog

Pin	Function	Pin Property
Digital 13(D13)	SPI Interface: SCK	SPI Interface D7~D11,13
Digital 11(D11)	SPI Interface: MOSI	
Digital 10(D10)	SPI Interface: CS	
Digital 9(D9)	SPI Interface: CD	
Digital 8(D8)	SPI Interface: RST	
Digital 7(D7)	To control the LCD backlight	Black Control Pin
Analog0(A0)	To control the 5 degree joystick	Analog Pin

Note:

- Please config the driving pin using this **U8GLIB_NHD_C12864 u8g(13, 11, 10, 9, 8);** command.. And notice to enable this command when using the u8glib example codes also.
- Use "setContrast" to config the contrast as you want. We highly recommend you to **setContrast** to 0 to get the best display effect.
- "setRot90/setRot180/setRot270" functions will be helpful to rotate the display direction as you want.Recommend to use **setRot180**.

For more useful lcd driving functions, please check u8glib userreference page.

Sample Code

Please download the U8glib u8glib arduino library first before compiling or uploading the sample code.

```
#include "U8glib.h"

U8GLIB_NHD_C12864 u8g(13, 11, 10, 9, 8);      // SPI Com: SCK = 13, MOSI = 11,
CS = 10, CD = 9, RST = 8

void draw(void) {
    // graphic commands to redraw the complete screen should be placed here
    u8g.setFont(u8g_font_unifont);
    //u8g.setFont(u8g_font_osb21);
    u8g.drawStr( 0, 20, "www.DFRobot.com");
}

void setup(void) {
    u8g.setContrast(0); // Config the contrast to the best effect
    u8g.setRot180(); // rotate screen, if required
    // set SPI backup if required
    //u8g.setHardwareBackup(u8g_backup_avr_spi);

    // assign default color value
    if ( u8g.getMode() == U8G_MODE_R3G3B2 ) {
        u8g.setColorIndex(255);      // white
    }
    else if ( u8g.getMode() == U8G_MODE_GRAY2BIT ) {
        u8g.setColorIndex(3);        // max intensity
    }
    else if ( u8g.getMode() == U8G_MODE_BW ) {
        u8g.setColorIndex(1);        // pixel on
    }
    else if ( u8g.getMode() == U8G_MODE_HICOLOR ) {
```

```
        u8g.setHiColorByRGB(255,255,255);
    }
}

void loop(void) {
    // picture loop
    u8g.firstPage();
    do {
        draw();
    }
    while( u8g.nextPage() );

    // rebuild the picture after some delay
    delay(500);
}
```