



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



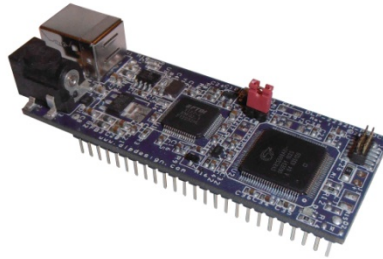

## USB - PSOC5 MODULE

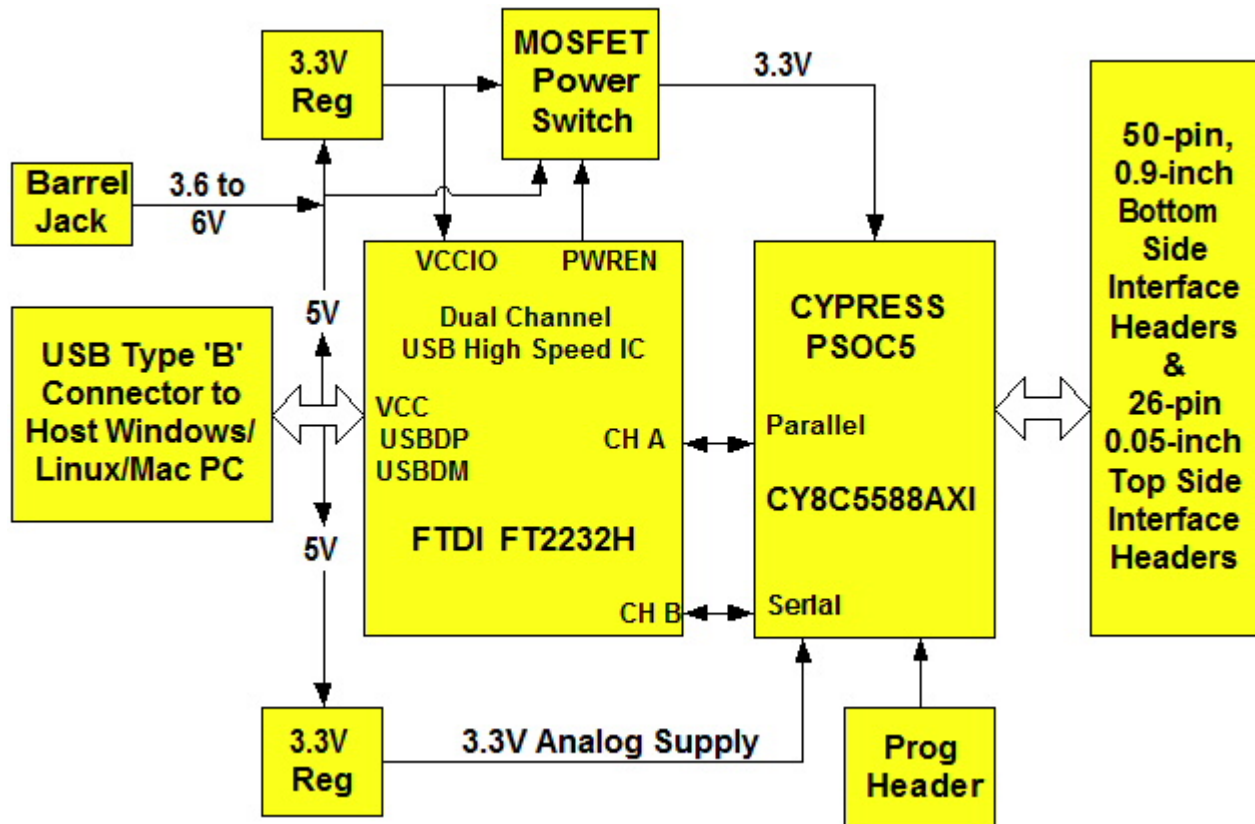

### FEATURES:

- Cypress CY8C5588 Programmable System-on-Chip (PSoC®) 5 containing:
  - 32-bit ARM Cortex-M3 CPU Core
  - Up to 67MHz Operation
  - 256 KBytes Flash Program Memory
  - 64 KBytes SRAM Memory
  - Internal Non-Volatile Configuration Memory for All Programmable Features
  - One Configurable Delta-Sigma ADC with 8- to 20-Bit Resolution
  - Two Configurable SAR ADC's with 8- to 12-Bit Resolution
  - Four 8-bit DAC's Configurable for Current or Voltage Mode Operation
  - Four Comparators and Four OpAmps
  - Four Configurable Multifunction Analog Blocks
  - 24 Programmable Logic Device (PLD-Based) Universal Digital Blocks (UDB)

- Four Configurable Timers/Counters/PWM Blocks
- Library of Standard Peripherals including SPI, UART and I2C
- High-Speed USB 2.0 Interface Featuring FTDI FT2232H Silicon—Both Parallel and Serial Interfaces are Supported
- 40 User I/O Channels plus 2 Output/Dedicated Peripheral Usage Pins
  - Any User I/O Can Route to Either Digital or Analog Peripheral
  - All User I/O are Configurable as Open Drain High/Low, Pull-Up/Pull-Down, High-Z or Strong Output
  - Any User I/O Can Support CapSense® Technology
  - Any User I/O Can Support LCD Direct Drive
  - All User I/O Can Support Configurable Pin State at Power-On Reset
- USB Port Powered or 5V External Power Barrel Jack
- USB 1.1- and 2.0-Compatible Interface
- Small Footprint: 3.0 x 1.2-Inch PCB and Standard 50-Pin, 0.9-Inch DIP Interface


## APPLICATIONS:

- Rapid Prototyping
- Educational Tool
- Industrial/Process Control
- Data Acquisition/Processing
- Embedded Processor

## 1.0 INTRODUCTION

The DLP-2232H-PSOC5 module is a low-cost, compact prototyping tool that can be used for rapid proof of concept, OEM solutions or within educational environments. The module is based on Cypress Semiconductor's Programmable System-on-Chip (PSoC®) 5 and Future Technology Devices International's FT2232H Dual-Channel High-Speed USB IC. The DLP-2232H-PSOC5 provides both the beginner as well as the experienced engineer with a rapid path to developing PSoC-based designs. When combined with the free PSoC® software development tools (PSoC Creator™ and PSoC Programmer™) from Cypress, this module is more than sufficient for creating anything from basic microcontroller with embedded analog and digital functions to a highly complex system controller. Both the hardware system architecture and the software are supported by the PSoC® software tools.

The DLP-2232H-PSOC5 has on-board voltage regulators that generate all required power supply voltages from a single 5-volt source. Power for the module can be taken from either the host USB port or from a user-supplied, external 5-volt power supply via an onboard standard barrel connector:

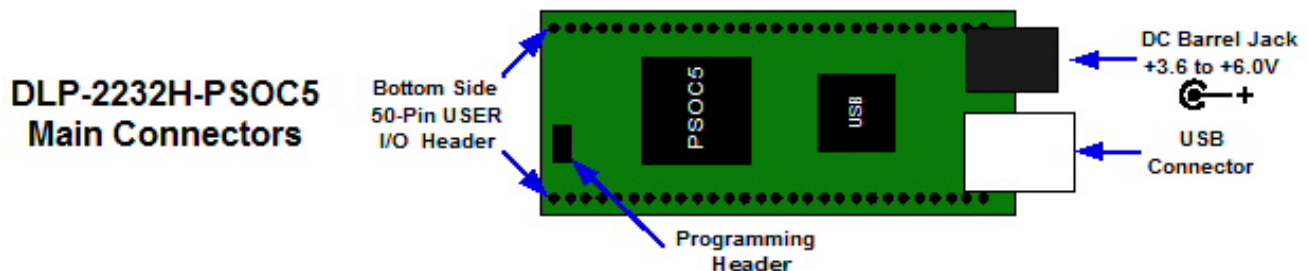


Connection to user electronics is made via a 50-pin, 0.9-inch wide, industry-standard 0.025-square inch post DIP header on the bottom of the board. The bottom side 50-pin header provides access to the user input/output pins as well as the USB port power output and the module's power input. The bottom side header mates with a user-supplied, standard, 50-pin, 0.9-inch spaced DIP socket.

Other on-board features include a GPIO-driven LED, SMT footprints for optional external KHz and MHz crystals and a JTAG/SWD port for connection to Cypress programming and debug tools.

## 2.0 REFERENCE DESIGN

A reference design comes pre-loaded in the Cypress PSoC<sup>®</sup> 5 on the DLP-2232H-PSOC5, and this is available for download to those who purchase the module. The design was created and compiled using the free Cypress PSoC Creator<sup>™</sup> tools. The reference design consists of the following blocks:

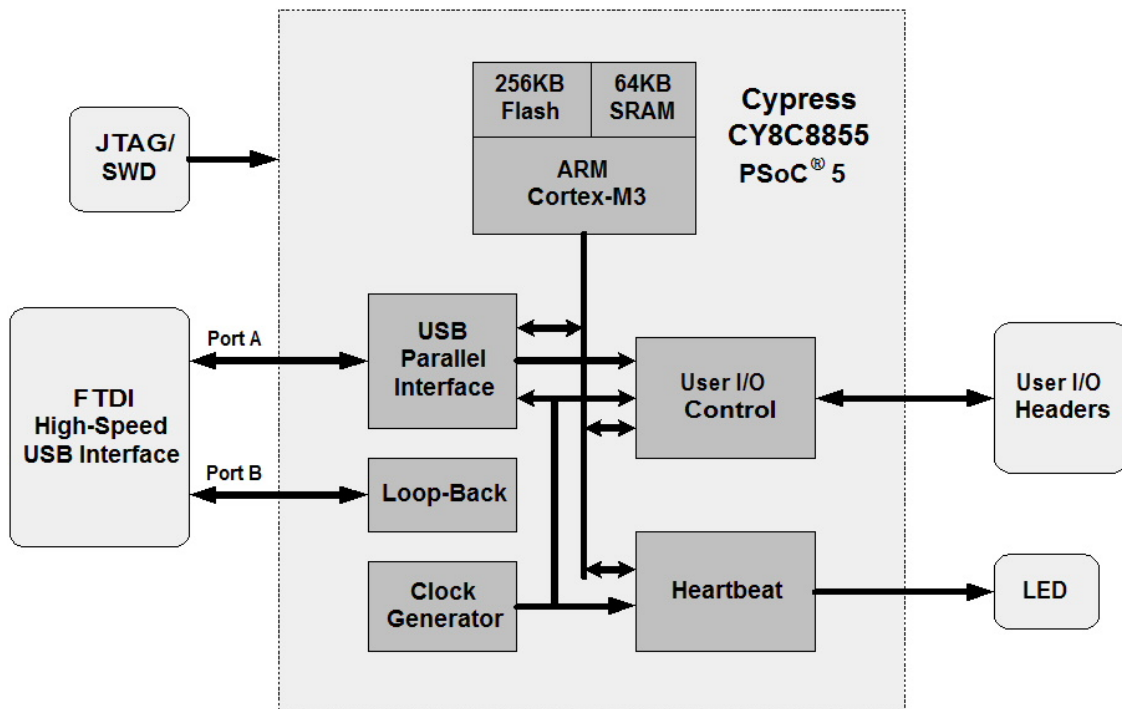

It contains the ARM Cortex M-3 CPU along with its internal memory, a USB Interface Block, a User I/O Block, a Heartbeat Pulse Generator and a Clock Generator. The JTAG Port is used to program and debug the PSoC<sup>®</sup> 5. The ARM core source code is written in C, and uses the compiler included with the PSoC Creator<sup>™</sup> tool. The hardware implemented in the PLD blocks was created using the Cypress Component Catalog and compiled using the synthesis tool also included in the PSoC Creator<sup>™</sup> tool.

The USB interface captures, interprets and returns command and data information sent from the host PC through the FTDI USB interface to the PSoC<sup>®</sup> 5. Commands include Ping, Flash LED, Set a User I/O Pin High or Low or Read a User I/O Pin (Section 10 explains these in detail).

The User I/O Block controls access to the 40 user I/O pins accessible through the bottom-side headers. The User I/O Block can configure these pins as inputs and read their state or as outputs and drive them high or low.

The Clock Generator Block creates the ARM CPU core clock and the 10-Hz clock for the Heartbeat Pulse Generator. The Heartbeat Pulse Generator gates the 10-Hz clock to flash the LED based on the status of the control bits from the ARM CPU.

The design occupies the following resources on the DLP-2232H-PSOC5 module's CY8C5588: Approximately 3% of the flash program memory, <1% of the SRAM data memory and 2% of logic resources.


```

Start Page  TopDesign.cysch  main.c  dlp-2232h-psoc.cydwr  dlp-2232h-psoc.rpt
3614 -----
3615 Technology mapping summary
3616 -----
3617
3618 Resource Type : Used : Free : Max : % Used
3619 =====
3620 Digital domain clock dividers : 2 : 6 : 8 : 25.00%
3621 Analog domain clock dividers : 0 : 4 : 4 : 0.00%
3622 Pins : 59 : 13 : 72 : 81.94%
3623 Macrocells : 1 : 191 : 192 : 0.52%
3624 Unique Pterms : 2 : 382 : 384 : 0.52%
3625 Total Pterms : 2 : : :
3626 Datapath Cells : 0 : 24 : 24 : 0.00%
3627 Status Cells : 7 : 17 : 24 : 29.17%
3628 Control/Count7 Cells : 12 : 12 : 24 : 50.00%
3629 Sync Cells : 51 : 17 : 68 : 75.00%
3630 Drqs : 0 : 24 : 24 : 0.00%
3631 Interrupts : 0 : 32 : 32 : 0.00%
3632 DSM Fixed Blocks : 0 : 1 : 1 : 0.00%
3633 VIDAC Fixed Blocks : 0 : 4 : 4 : 0.00%
3634 SC Fixed Blocks : 0 : 4 : 4 : 0.00%
3635 Comparator Fixed Blocks : 0 : 4 : 4 : 0.00%
3636 Opamp Fixed Blocks : 0 : 4 : 4 : 0.00%
3637 CapSense Buffers : 0 : 2 : 2 : 0.00%
3638 CAN Fixed Blocks : 0 : 1 : 1 : 0.00%
3639 Decimator Fixed Blocks : 0 : 1 : 1 : 0.00%
3640 I2C Fixed Blocks : 0 : 1 : 1 : 0.00%
3641 Timer Fixed Blocks : 0 : 4 : 4 : 0.00%
3642 DFB Fixed Blocks : 0 : 1 : 1 : 0.00%
3643 USB Fixed Blocks : 0 : 1 : 1 : 0.00%
3644 LCD Fixed Blocks : 0 : 1 : 1 : 0.00%
3645 EMIF Fixed Blocks : 0 : 1 : 1 : 0.00%
3646 LPF Fixed Blocks : 0 : 2 : 2 : 0.00%
3647 SAR Fixed Blocks : 0 : 2 : 2 : 0.00%
3648 </CYPRESSTAG>
3649 Technology Mapping: Elapsed time ==> 0s.078ms
3650 Info: mpr.M0037: Unused pieces of the design have been optimized out. See the Tech mappin
3651 Tech mapping phase: Elapsed time ==> 0s.202ms
3652 </CYPRESSTAG>
3653 {Analog Placement}
3713 {Analog Routing}
3717 <CYPRESSTAG name="Digital Placement">
3718 <CYPRESSTAG name="PLD Packing">
3719 <CYPRESSTAG name="PLD Packing Summary" expanded>
3720
3721 -----
3722 PLD Packing Summary
3723 -----
3724 Resource Type : Used : Free : Max : % Used
3725 =====
3726 PLDs : 1 : 47 : 48 : 2.08%
3727
-----
Output
Show output from: All
arm-none-eabi-ar.exe -rs .\CortexM3\ARM_GCC_441\Release\dlp-2232h-psoc.a .\CortexM3\ARM_GCC_441\R
arm-none-eabi-ar.exe: creating .\CortexM3\ARM_GCC_441\Release\dlp-2232h-psoc.a
arm-none-eabi-gcc.exe -mthumb -march=armv7-m -mfix-cortex-m3-ldrd -T .\Generated_Source\PSoc5\cm3
arm-none-eabi-objcopy.exe -O ihex .\CortexM3\ARM_GCC_441\Release\dlp-2232h-psoc.elf .\CortexM3\AR
cyhextool -o .\CortexM3\ARM_GCC_441\Release\dlp-2232h-psoc.hex -f .\CortexM3\ARM_GCC_441\Release\
Flash used: 6704 of 262144 bytes (2.6 %).
SRAM used: 360 of 65536 bytes (0.5 %).
----- Rebuild Succeeded: 01/17/2012 13:20:00 -----
Output Notice List

```

More reference designs are planned. Please contact DLP Design with any specific requests.

### 3.0 PSoC<sup>®</sup> 5 SPECIFICATIONS

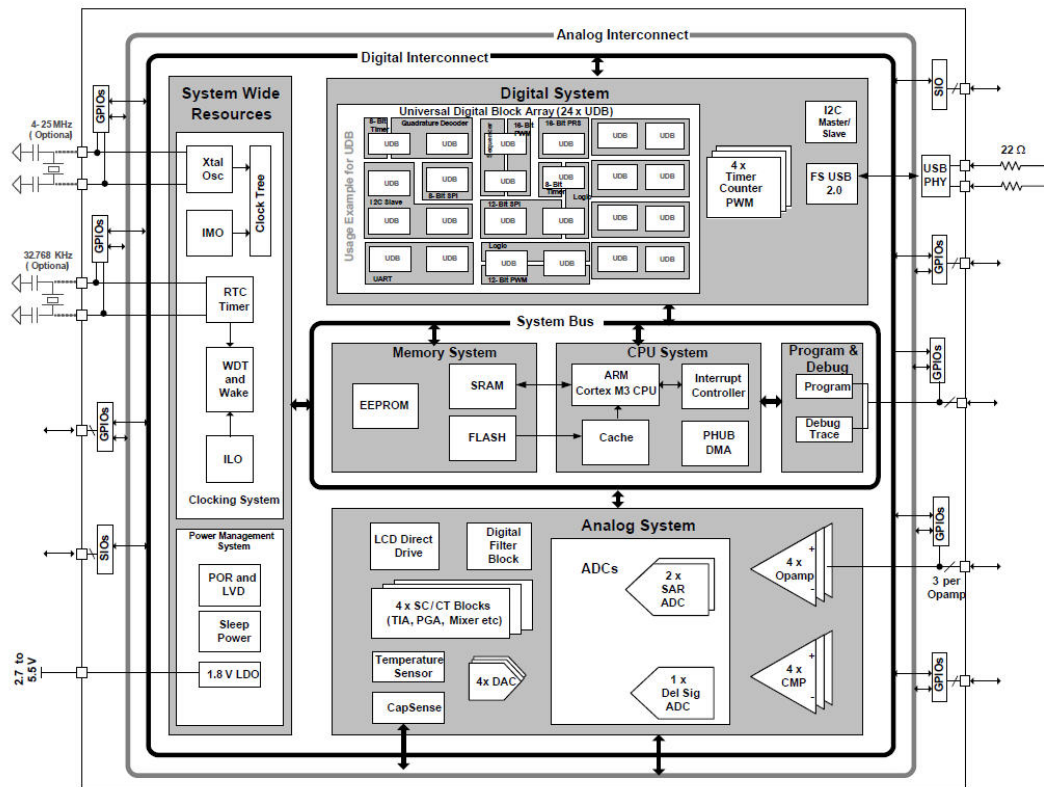

**The device used on the DLP-2232H-PSOC5 is the Cypress PSoC<sup>®</sup> 5 CY8C5588AXI-060. It contains the following:**

- Processor System:

CPU Core:	32-Bit ARM Cortex-M3
CPU Speed:	67MHz, 1.25 DMIPS/MHz, 80+ DMIP's Performance
Architecture:	Harvard, 3-Stage Pipeline
Instruction Set:	Thumb <sup>®</sup> -2 (includes 16-Bit and 32-Bit Instructions)
Memory:	256-KB Flash, 64 Kbytes SRAM, 2-KB EEPROM (4 GB Address Space)
Cache:	128 Byte with Internal Controller
Interrupts:	Nested Vectored Interrupt Controller Supports 16 System Exceptions and 32 Peripheral Interrupts (48 total)
DMA:	24 Channels with 8 Levels of Priority; up to 127 Transaction Descriptors
Clocking:	3- to 48-MHz Internal Main Oscillator; PLL Output of 24-67 MHz

- Analog System:

A/D Convertors:	One 8- to 20-bit Delta-Sigma ADC; Two 8- to 12-bit SAR ADC's
D/A Convertors:	Four 8-bit DAC's Configurable for Voltage or Current
Reference:	Internal Precision Reference Included
Comparators:	Four Factory Trimmed to 15 mV with Two Optional Low-Pass Filters
OpAmps:	Four Configurable as Gain Stage or Voltage Follower
Other:	Four Configurable Switched Capacitance/Continuous Time Blocks for use as OpAmps, Unity Gain Buffer, PGA, TIA, Mixer, etc. CapSense, Digital Filter Block and Temperature Sensor.

- Digital System:

Universal Digital Blocks: 24 UDB's; Each Consisting of 2 Programmable Logic Devices (PLD),  
1 Datapath ALU, Status Register and Control Register  
PLD: 12V4 PAL Equivalent (12 Input AND Array, OR'd into 4 Opt. Registers)  
Datapath ALU: 8-Bit Wide; Configurable as 2 Accumulators, 2 Data Registers, 2 4-Entry  
FIFOs, an 8-Function ALU, a 4-Function Shift and Masking Function  
UDB Configurations: UARTs, I<sup>2</sup>C, SPI, CAN, Timer, Counter, PWM, Logic Gates, LCD Drive  
Custom User Logic Blocks  
Other: Four Fixed Function 8- or 16-Bit Timer/Counter/PWM Blocks

## 4.0 ABSOLUTE MAXIMUM RATINGS

Stresses above those listed here may cause permanent damage to the DLP-2232H-PSOC5:

Operating Temperature: 0-70°C

Voltage on Digital Inputs with Respect to Ground: -0.5V to +3.8V


Sink/Source Current on Any I/O: 24 mA / 18 mA (configured for strong drive)

## 5.0 WARNINGS

- Unplug from the host PC and power adapter before connecting to I/O on the DLP-2232H-PSOC5.
- Isolate the bottom of the board from all conductive surfaces.
- Observe static precautions to prevent damage to the DLP-2232H-PSOC5 module.

## 6.0 PSoC<sup>®</sup> 5 Programming

All of the PSoC<sup>®</sup> 5 device's internal memory can be programmed using the free Cypress PSoC<sup>®</sup> Programmer Software and a Cypress PSoC<sup>®</sup> MiniProg 3 Programming Cable (purchased separately) available from Cypress or its distributors. The MiniProg cable connects to the J4 programming port on the DLP-2232H-PSOC5 module. Observe the cable orientation carefully. The connector key pin marking is on the silkscreen at the top edge of the PCB, opposite from the USB connector. The cable orientation is as shown below:

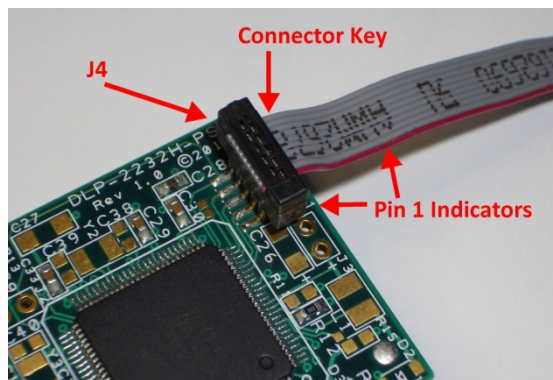

## 7.0 EEPROM SETUP / MPROG

The DLP-2232H-PSOC5 has a dual-channel USB interface to the host PC. Channel A of the high-speed USB interface is connected to the PSoC<sup>®</sup> 5 in FIFO parallel mode to allow for the fastest possible transfers between the USB host and the PSoC<sup>®</sup> 5. Channel B of the high-speed USB interface is connected to the PSoC<sup>®</sup> 5 in serial mode to allow for UART communication between the host PC and the PSoC<sup>®</sup> 5. A 93LC46B EEPROM connected to the USB interface IC is used to store the setup for the two channels. The parameters stored in the EEPROM include the Vendor ID (VID), Product ID (PID), Serial Number, Description String, driver selection (VCP or D2XX) and port type (UART serial or FIFO parallel).

To support the configuration described above, Channel A of the USB device must be configured in 245 FIFO mode, and Channel B of the USB device must be configured in RS232 UART mode. Either VCP or D2XX drivers can be used. By default, the USB device EEPROM configuration is set for D2XX drivers on both channels with 245 FIFO on Channel A and RS232 UART on Channel B. The D2XX drivers provide faster throughput but require working with a \*.lib or \*.dll library in the host application. The VCP drivers make the DLP-2232H-PSOC5 appear as two RS232 ports to the host application.

The operational modes and other EEPROM selections are written to the EEPROM using the MPROG utility. This utility and its manual are available for download from the bottom of the page at [www.dlpdesign.com](http://www.dlpdesign.com).

## 8.0 TEST HEX FILE

A test hex file derived from the reference design described earlier is provided as a download from the DLP Design website to customers who purchase the module. This design provides rudimentary access to the I/O features of the DLP-2232H-PSOC5. The DLP-2232H-PSOC5 module comes preprogrammed with this file. The following features are provided:

- Ping
- Read the High/Low State of the I/O Pins
- Drive the I/O Pins High/Low or Read their High/Low State

This hex file is available from the DLP-2232H-PSOC5's download page. (The command structure that supports these features is explained in Section 10.)

## 9.0 USB DRIVERS

USB drivers for the following operating systems are available for download from the DLP Design website at [www.dlpdesign.com](http://www.dlpdesign.com):

OPERATING SYSTEM SUPPORT	
Windows 7 32-Bit	Windows 7 64-Bit
Windows Vista, Vista x64	Mac OSX
Windows XP, XP x64	Mac OS9
Windows Server 2008, x64	Mac OS8
Windows Server 2003, x64	Linux
Windows 2000	Windows CE 4.2-6.0




Note:

If you are utilizing the dual-mode drivers from FTDI (CDM2.X.X), and you want to use the Virtual COM Port (VCP) drivers instead, then it may be necessary to disable the D2XX drivers first via Device Manager. To do so, right click on the entry under USB Controllers that appears when the DLP-2232H-PSOC5 is connected, select Properties, select the Advanced tab, check the option for "Load VCP" and click OK. Then unplug and replug the DLP-2232H-PSOC5, and a COM port should appear in Device Manager under Ports (COM & LPT).

## 10.0 USING THE DLP-2232H-PSOC5


Select a power source via Header Pins 24 and 25, and connect the DLP-2232H-PSOC5 to the PC to initiate the loading of the USB drivers. The easiest way to do this is to connect Pins 24 and 25 to each other using a 0.1-inch shunt. This will result in operational power being taken from the host PC.

### Top View (J1 Interface Headers on Bottom of PCB)

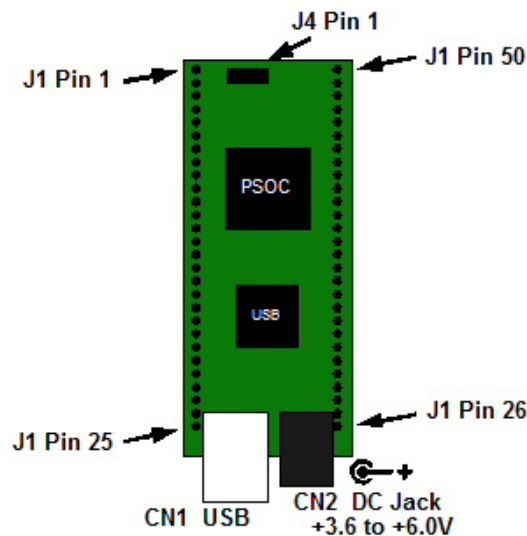

Connect the DLP-2232H-PSOC5 to the PC to initiate the loading of USB drivers. Once the USB drivers are loaded, the DLP-2232H-PSOC5 is ready for use. All commands are issued as multi-byte command packets consisting of at least two bytes.

## Packet Structure

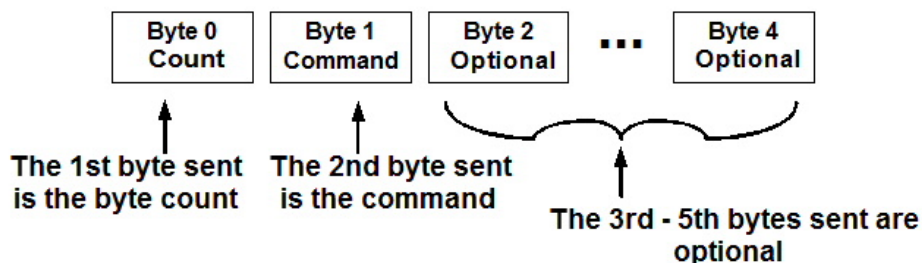

You can either utilize the Test Application available from <http://www.dlpdesign.com/test.shtml> with the DLP-2232H-PSOC5 (as described in Section 11), or you can write your own program in your language of choice.

If you are using the VCP drivers, begin by opening the COM port, and send multi-byte commands as shown in Table 1 below. There is no need to set the baud rate because the DLP-2232H-PSOC5 uses a parallel interface between the USB IC and the PSoC<sup>®</sup> 5. (The Ping Command can be used to locate the correct COM port used for communicating with the DLP-2232H-PSOC5, or you can look in Device Manager to see which port was assigned by Windows.) If you are using the D2XX drivers as with the Test Application, no COM port selection is necessary.

<b>TABLE 1</b>				
<b>Command Packets</b>				
<b>Command Packet</b>	<b>Description</b>	<b>Byte</b>	<b>Hex Value</b>	<b>Return/Comments</b>
Ping	Issues Ping	0	0x02	Packet Byte Count
		1	0x27	Ping Command - 0x50 <sup>1</sup> (ASCII 'P') will be returned indicating that the DLP-2232H-PSOC5 is found on the selected port.
Flash	Flashes LED	0	0x02	Packet Byte Count
		1	0x28	Flashes LED command; lasts approximately one second. Returns echo of command sent (0x28) <sup>1</sup> only.
LED On/Off	Accesses the Internal Version/ Status Registers	0	0x03	Packet Byte Count
		1	0x29	Control LED Command
		2	0x00 or 0x01	LED State: 0x00 = LED Off; 0x01 = LED On  Returns echo of command sent (0x29) <sup>1</sup> only.
Read/Write Pin	Reads the State or Writes to One of the User I/O Pins	0	0x04 or 0x05	Packet Byte Count: 4 Bytes required for Read, 5 bytes required for Write.
		1	0x30	Read/Write Pin Command
		2	0x00 – 0xF7 <sup>4</sup>	User I/O channel/port pin numbers (these are described in Table 2).
		3	0x00 or 0x01	Selects Write or Read as follows: 0x00 = Write Pin (Specified Pin is an Output) 0x01 = Read Pin (Specified Pin is an Input)  User I/O pin 0xnn is read and returns <sup>1</sup> the first byte as: 0x00 = User I/O Pin 0xnn is Low 0x01 = User I/O Pin 0xnn is High  Read Pin returns echo of command sent (0x30) <sup>1,2</sup> as the second byte.
		4 <sup>5</sup>	0x00 or 0x01	Write Value:  0x00 = User I/O Pin 0xnn is Low 0x01 = User I/O Pin 0xnn is High  Write Pin returns echo of command sent (0x30) <sup>1,2</sup> only.

**Notes:**

1. If the value 0xE0 is returned the module received an invalid command byte (not 0x27,0x28,0x29 or 0x30).
2. If the value 0xE1 is returned the module received an invalid port pin byte (refer to table 2 for valid ports).
3. If the value 0xE3 is returned the module received a read request for a write only port pin (P15.6 & P15.7).
4. Not all Hex values between 0x00 and 0xF7 are valid (refer to Table 2 for valid channel values).
5. Byte 4 is only needed when Byte 3 is set to 0 (Write).

The USER I/O Read/Write Pin Command's I/O number mapping to the physical I/O pins on the DLP-2232H-PSOC5 board are described in the following table:

<b>TABLE 2</b>			
<b>Module User I/O</b>			
<b>I/O Number</b>	<b>DLP-2232H-PSOC5 Pin</b>	<b>CY8C5588 Pin</b>	<b>PSoC<sup>®</sup> 5 Pin Configurations Available</b>
0x00 (P0.0)	J1 Pin 33	71	Port 0.0: GPIO (Digital I/O, Analog I/O), OpAmp 2 Out
0x01 (P0.1)	J1 Pin 36	72	Port 0.1: GPIO (Digital I/O, Analog I/O), OpAmp 0 Out
0x02 (P0.2)	J1 Pin 35	73	Port 0.2: GPIO (Digital I/O, Analog I/O), OpAmp 0+, SAR 1 REF
0x03 (P0.3)	J1 Pin 34	74	Port 0.3: GPIO (Digital I/O, Analog I/O), OpAmp 0-, REF 0
0x04 (P0.4)	J1 Pin 31	76	Port 0.4: GPIO (Digital I/O, Analog I/O), OpAmp 2+, SAR 0 REF
0x05 (P0.5)	J1 Pin 29	77	Port 0.5: GPIO (Digital I/O, Analog I/O), OpAmp 2-
0x06 (P0.6)	J1 Pin 30	78	Port 0.6: GPIO (Digital I/O, Analog I/O), IDAC 0
0x07 (P0.7)	J1 Pin 32	79	Port 0.7: GPIO (Digital I/O, Analog I/O), IDAC 2
0x20 (P2.0)	J1 Pin 45	95	Port 2.0: GPIO (Digital I/O, Analog I/O)
0x21 (P2.1)	J1 Pin 43	96	Port 2.1: GPIO (Digital I/O, Analog I/O)
0x22 (P2.2)	J1 Pin 38	97	Port 2.2: GPIO (Digital I/O, Analog I/O)
0x23 (P2.3)	J1 Pin 41	98	Port 2.3: GPIO (Digital I/O, Analog I/O)
0x24 (P2.4)	J1 Pin 42	99	Port 2.4: GPIO (Digital I/O, Analog I/O)
0x25 (P2.5)	J1 Pin 44	1	Port 2.5: GPIO (Digital I/O, Analog I/O)
0x26 (P2.6)	J1 Pin 39	2	Port 2.6: GPIO (Digital I/O, Analog I/O)
0x27 (P2.7)	J1 Pin 40	3	Port 2.7: GPIO (Digital I/O, Analog I/O)
0x30 (P3.0)	J1 Pin 14	44	Port 3.0: GPIO (Digital I/O, Analog I/O), IDAC 1
0x31 (P3.1)	J1 Pin 12	45	Port 3.1: GPIO (Digital I/O, Analog I/O), IDAC 3
0x32 (P3.2)	J1 Pin 16	46	Port 3.2: GPIO (Digital I/O, Analog I/O), OpAmp 3-, REF 1
0x33 (P3.3)	J1 Pin 13	47	Port 3.3: GPIO (Digital I/O, Analog I/O), OpAmp 3+
0x34 (P3.4)	J1 Pin 19	48	Port 3.4: GPIO (Digital I/O, Analog I/O), OpAmp 1-
0x35 (P3.5)	J1 Pin 15	49	Port 3.5: GPIO (Digital I/O, Analog I/O), OpAmp 1+
0x36 (P3.6)	J1 Pin 17	51	Port 3.6: GPIO (Digital I/O, Analog I/O), OpAmp 1 Out
0x37 (P3.7)	J1 Pin 18	52	Port 3.7: GPIO (Digital I/O, Analog I/O), OpAmp 3 Out
0x40 (P4.0)	J1 Pin 11	69	Port 4.0: GPIO (Digital I/O, Analog I/O),
0x41 (P4.1)	J1 Pin 10	70	Port 4.1: GPIO (Digital I/O, Analog I/O)
0x42 (P4.2)	J1 Pin 9	80	Port 4.2: GPIO (Digital I/O, Analog I/O)
0x43 (P4.3)	J1 Pin 8	81	Port 4.3: GPIO (Digital I/O, Analog I/O)
0x44 (P4.4)	J1 Pin 7	82	Port 4.4: GPIO (Digital I/O, Analog I/O)
0x45 (P4.5)	J1 Pin 6	83	Port 4.5: GPIO (Digital I/O, Analog I/O)
0x46 (P4.6)	J1 Pin 5	84	Port 4.6: GPIO (Digital I/O, Analog I/O)
0x47 (P4.7)	J1 Pin 4	85	Port 4.7: GPIO (Digital I/O, Analog I/O)
0xC0 (P12.0)	J1 Pin 21	53	Port 12.0: SIO (Digital I/O, Analog I/O), I <sup>2</sup> C 1: SDA
0xC1 (P12.1)	J1 Pin 22	54	Port 12.1: SIO (Digital I/O, Analog I/O), I <sup>2</sup> C 1: SCL
0xC2 (P12.2)	J1 Pin 27	67	Port 12.2: SIO (Digital I/O, Analog I/O)
0xC3 (P12.3)	J1 Pin 26	68	Port 12.3: SIO (Digital I/O, Analog I/O)
0xC4 (P12.4)	J1 Pin 47	4	Port 12.4: SIO (Digital I/O, Analog I/O), I <sup>2</sup> C 0: SCL
0xC5 (P12.5)	J1 Pin 48	5	Port 12.5: SIO (Digital I/O, Analog I/O), I <sup>2</sup> C 0: SDA
0xC6 (P12.6)	J1 Pin 50	29	Port 12.6: SIO (Digital I/O, Analog I/O)
0xC7 (P12.7)	J1 Pin 49	30	Port 12.7: SIO (Digital I/O, Analog I/O)

0xF6 (P15.6)	J1 Pin 2	35	Port 15.6: USBIO, D+, SWDIO (See Note 1)
0xF7 (P15.7)	J1 Pin 1	36	Port 15.7: USBIO, D-, SWDCK (See Note 1)

Note 1: Not implemented on the DLP-2232H-PSOC5 module. Can be implemented by adding a crystal.

TABLE 3 Module Power		
I/O Number	DLP-2232H-PSOC5 Pin	Description
+5V IN	J1 Pin 24	+5V Input to the DLP-2232H-PSOC5
+5V USB	J1 Pin 25	+5V Supplied by Host PC USB Port
GND	J1 Pin 3, 20, 23, 28, 37 and 46	Ground

## 11.0 USING THE DLP TEST APPLICATION (OPTIONAL)


Users can either design their own application interface to send USB commands to the DLP-2232H-PSOC5 module or utilize the test application tool available from DLP Design. The Test Application is available in a free version for download from the DLP Design website at [www.dlpdesign.com/test.shtml](http://www.dlpdesign.com/test.shtml). Using this tool, single- and multi-byte commands can be sent to the DLP-2232H-PSOC5 board. Once installed the test application is used as follows:

The screenshot shows the 'DLP Design Test Application Ver 2.0s' window. Red arrows and text annotations provide a step-by-step guide to using the application:

- 1. Select Driver (DLL for D2XX is default)**: Points to the 'DLL' radio button in the 'Select Driver' section.
- 2. Click Search and Select Port A**: Points to the 'Search' button and the 'Port' dropdown menu.
- 3. Click Open**: Points to the 'Open' button.
- 4. Check that Port Status is now "OPEN"**: Points to the 'Port Status' field, which displays 'OPEN'.
- 5. Enter Bytes to be Sent**: Points to the 'Send' button in the 'Send To target' section.
- 6. Enter Byte Count**: Points to the 'Xmit' field, which contains the value '2'.
- 7. Click Send**: Points to the 'Send' button in the 'Send To target' section.
- 8. Bytes returned from DLP-2232H-PSOC will show up here**: Points to the 'Receive Data' window, which displays the received data: '80 0x50 'P', '41 0x29 '}', '0 0x00 ', '48 0x30 '0''.

The commands used to interface to the DLP-2232H-PSOC5 are detailed in Section 10 of this datasheet.

# 12.0 MECHANICAL DIMENSIONS IN INCHES (MM) (PRELIMINARY)

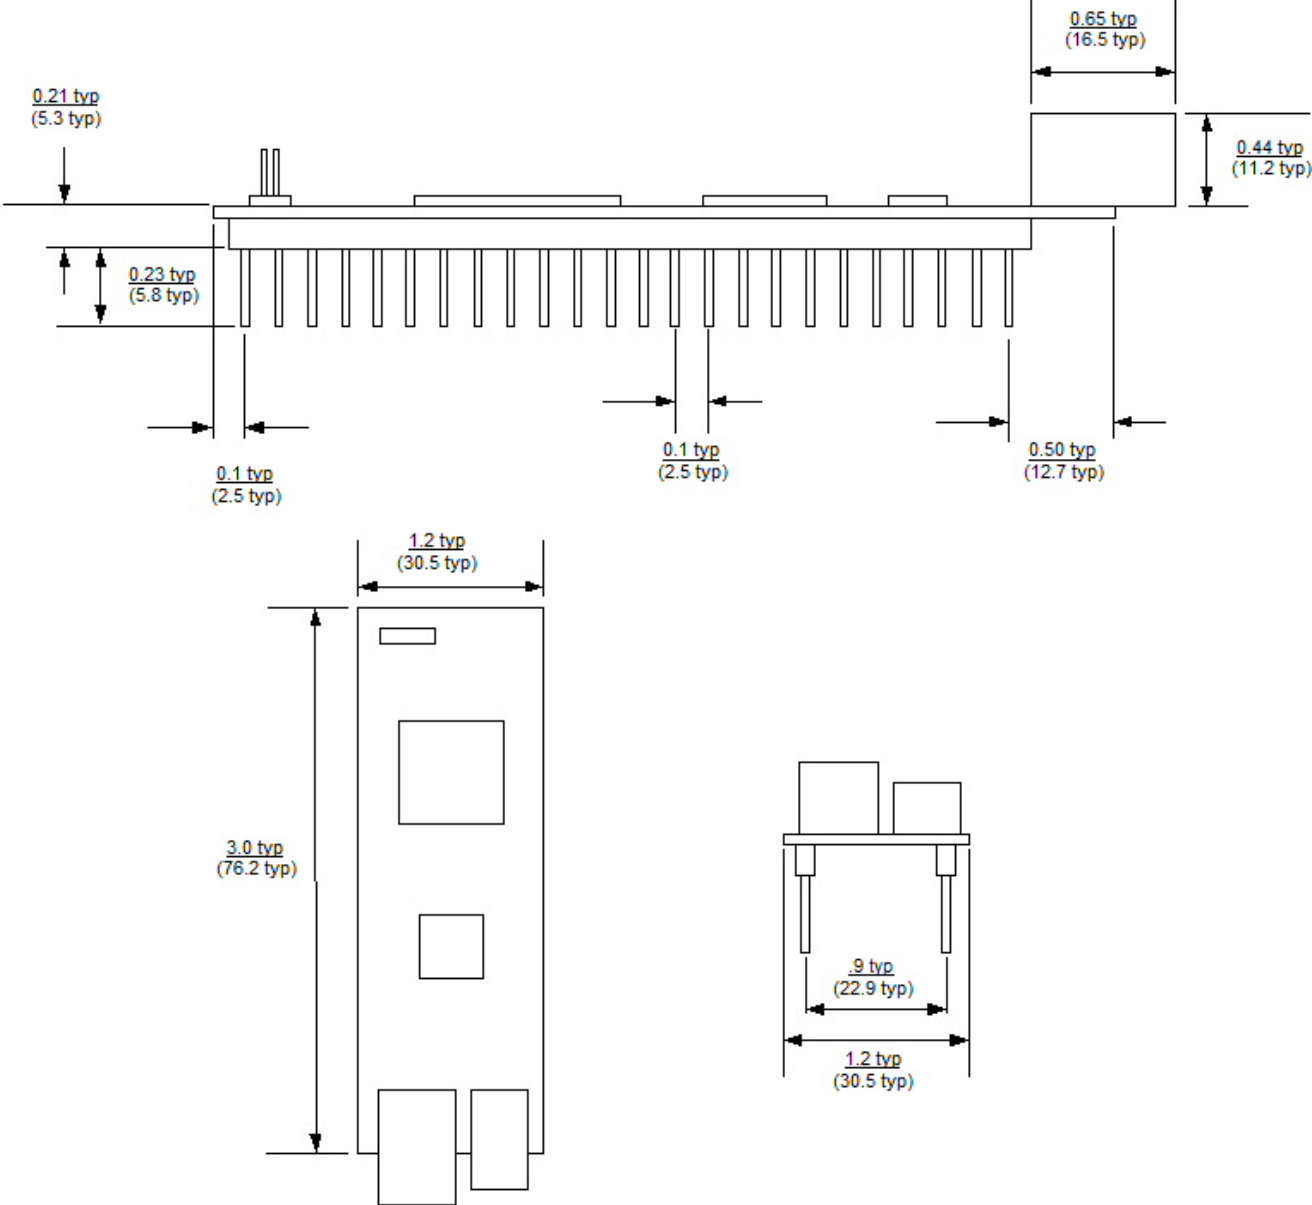

## 13.0 DISCLAIMER

© DLP Design, Inc., 2000-2012

Neither the whole nor any part of the information contained herein nor the product described in this manual may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder.

This product and its documentation are supplied on an as-is basis, and no warranty as to their suitability for any particular purpose is either made or implied. DLP Design, Inc. will not accept any claim for damages whatsoever arising as a result of the use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury.

This document provides preliminary information that may be subject to change without notice.

## 14.0 CONTACT INFORMATION


DLP Design, Inc.  
1605 Roma Lane  
Allen, TX 75013

Phone: 469-964-8027  
Fax: 415-901-4859  
Email Sales: [sales@dlpdesign.com](mailto:sales@dlpdesign.com)  
Email Support: [support@dlpdesign.com](mailto:support@dlpdesign.com)  
Website URL: <http://www.dlpdesign.com>

# DLP-2232H-PSOC5

PRELIMINARY

v1.1

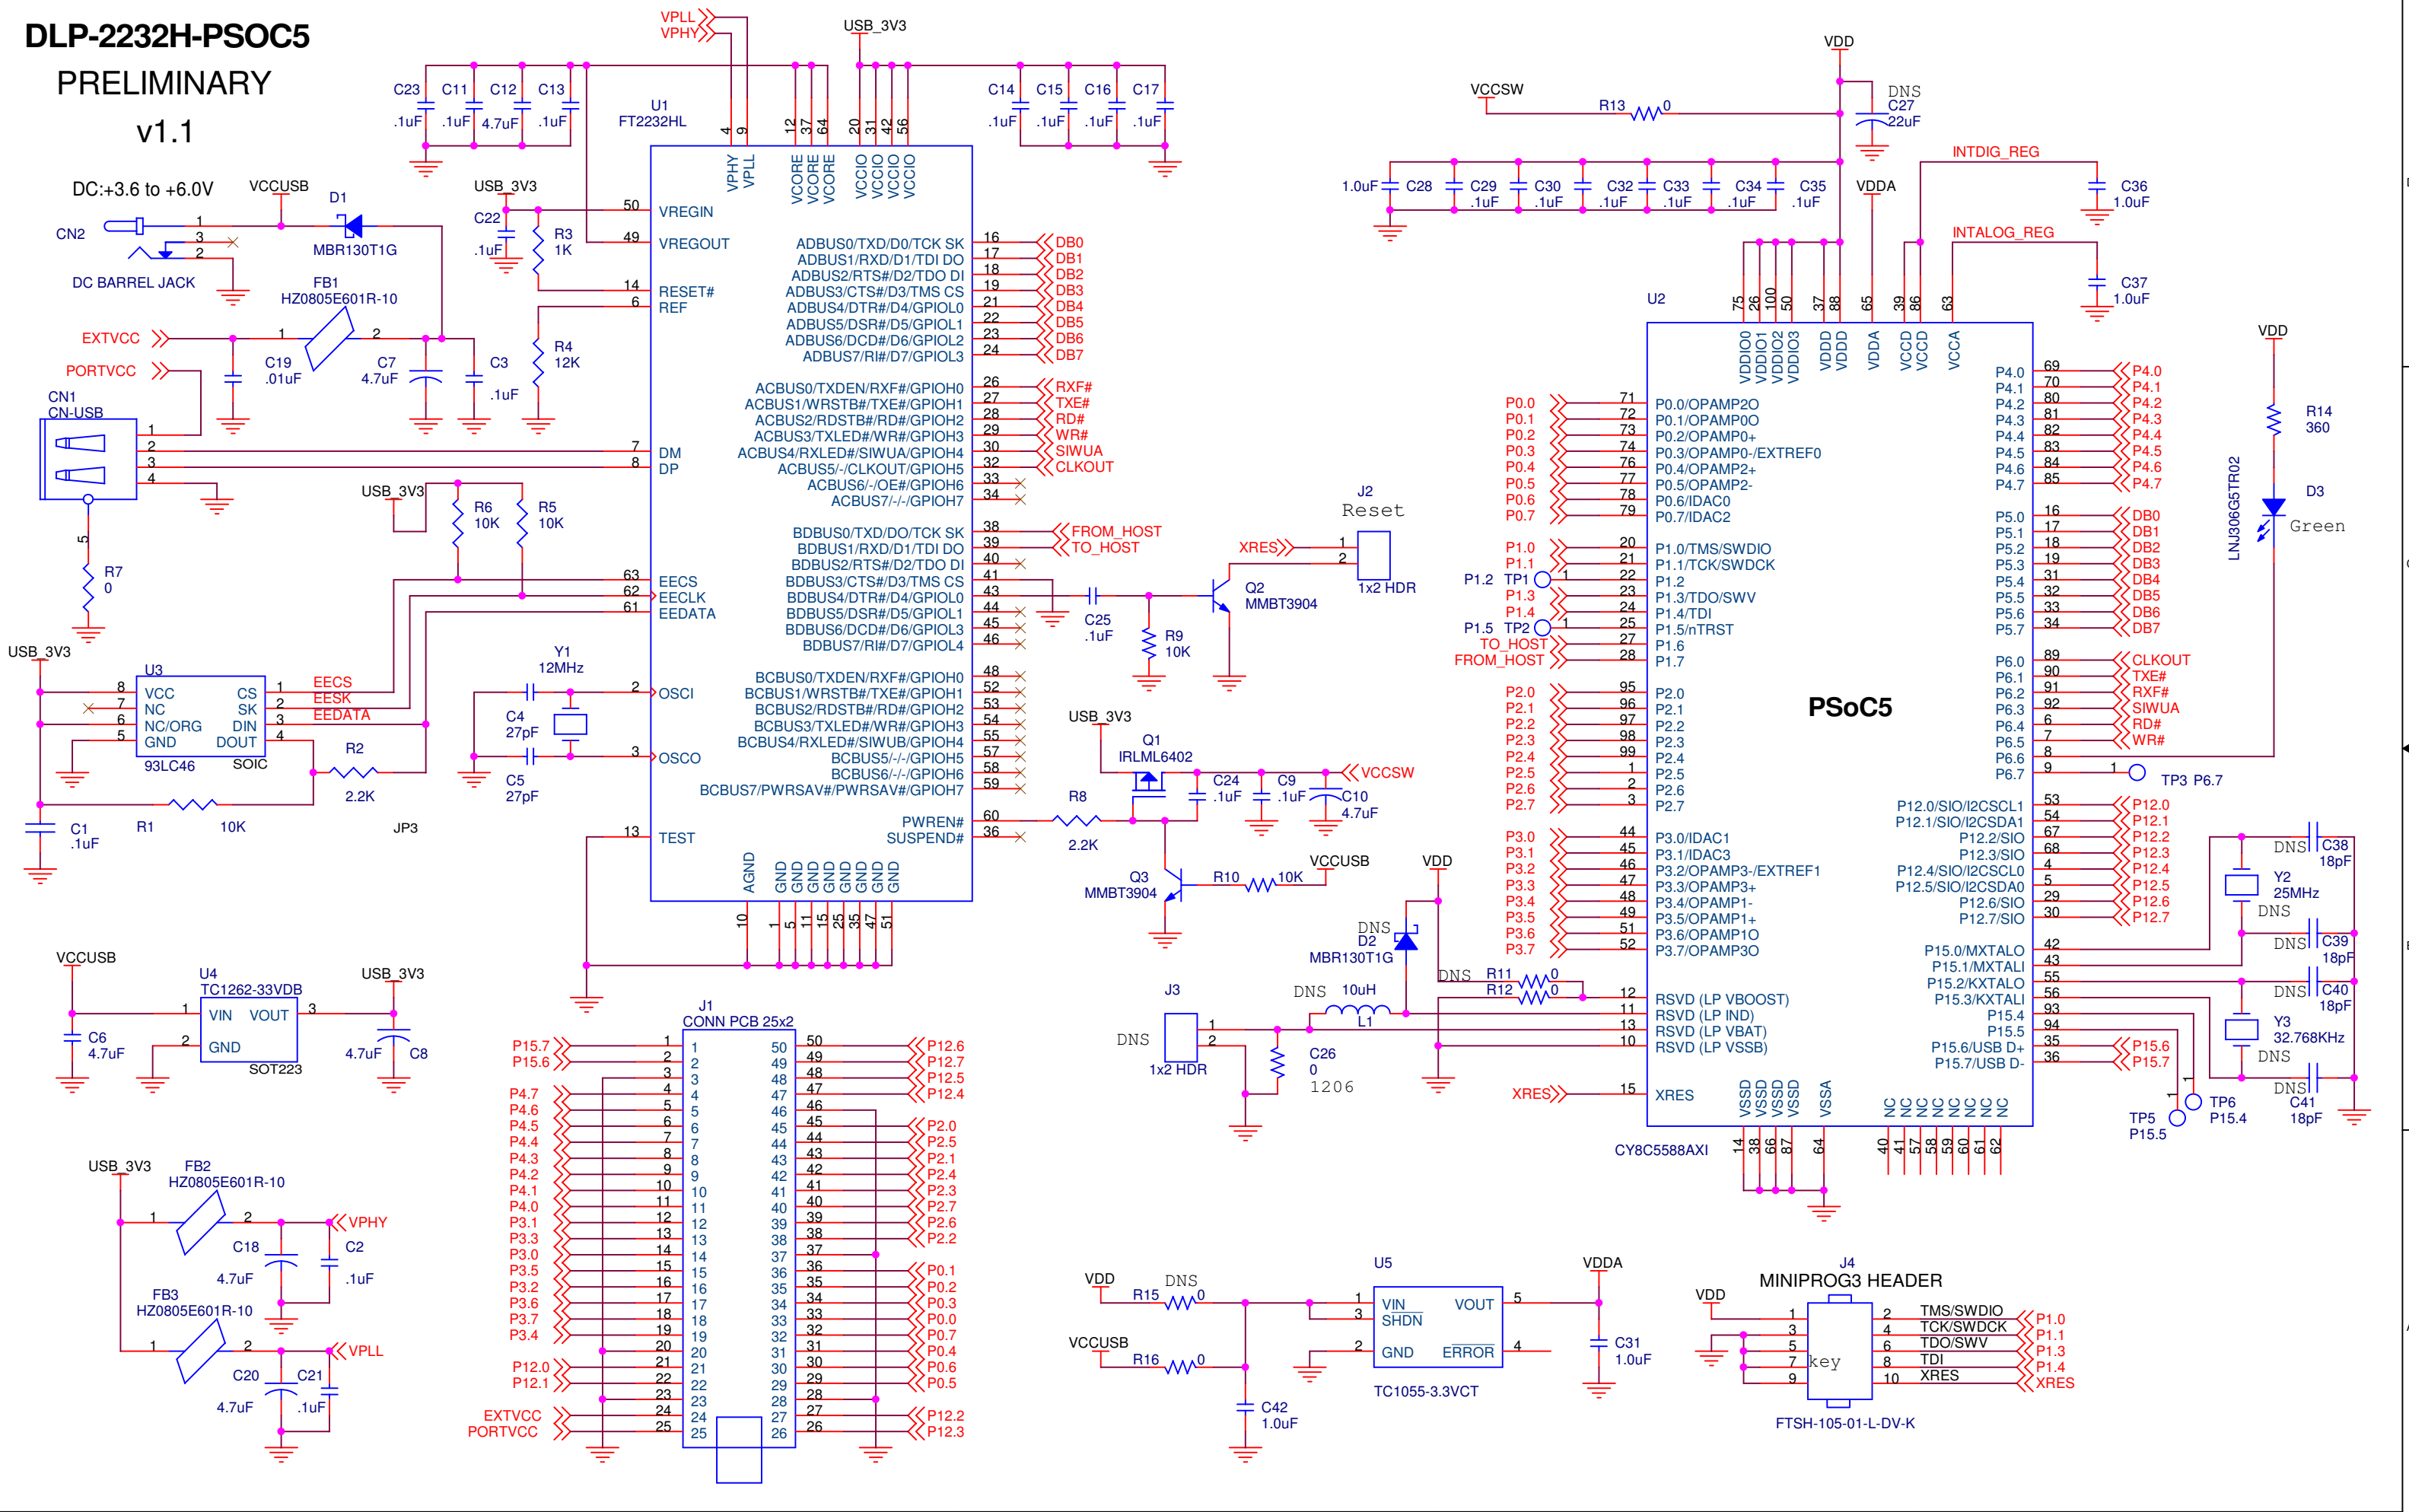

Pin	Signal	Pin	Signal
16	DB0	49	VREGOUT
17	DB1	50	VREGIN
18	DB2	6	RESET#
19	DB3	14	REF
21	DB4	7	DM
22	DB5	8	DP
23	DB6	63	EECS
24	DB7	62	EECLK
26	RXF#	61	EEDATA
27	TXE#	2	OSCI
28	RD#	3	OSCO
29	WR#	13	TEST
30	SIWUA	10	AGND
32	CLKOUT	1	GND
33		5	GND
34		11	GND
38	FROM_HOST	15	GND
39	TO_HOST	25	GND
40		35	GND
41		45	GND
43		55	GND
44		65	GND
45		75	GND
46		85	GND
48		95	GND
52		105	GND
53		115	GND
54		125	GND
55		135	GND
57		145	GND
58		155	GND
59		165	GND
60		175	GND
36		185	GND
		195	GND
		205	GND
		215	GND
		225	GND
		235	GND
		245	GND
		255	GND
		265	GND
		275	GND
		285	GND
		295	GND
		305	GND
		315	GND
		325	GND
		335	GND
		345	GND
		355	GND
		365	GND
		375	GND
		385	GND
		395	GND
		405	GND
		415	GND
		425	GND
		435	GND
		445	GND
		455	GND
		465	GND
		475	GND
		485	GND
		495	GND
		505	GND
		515	GND
		525	GND
		535	GND
		545	GND
		555	GND
		565	GND
		575	GND
		585	GND
		595	GND
		605	GND
		615	GND
		625	GND
		635	GND
		645	GND
		655	GND
		665	GND
		675	GND
		685	GND
		695	GND
		705	GND
		715	GND
		725	GND
		735	GND
		745	GND
		755	GND
		765	GND
		775	GND
		785	GND
		795	GND
		805	GND
		815	GND
		825	GND
		835	GND
		845	GND
		855	GND
		865	GND
		875	GND
		885	GND
		895	GND
		905	GND
		915	GND
		925	GND
		935	GND
		945	GND
		955	GND
		965	GND
		975	GND
		985	GND
		995	GND
		1005	GND
		1015	GND
		1025	GND
		1035	GND
		1045	GND
		1055	GND
		1065	GND
		1075	GND
		1085	GND
		1095	GND
		1105	GND
		1115	GND
		1125	GND
		1135	GND
		1145	GND
		1155	GND
		1165	GND
		1175	GND
		1185	GND
		1195	GND
		1205	GND
		1215	GND
		1225	GND
		1235	GND
		1245	GND
		1255	GND
		1265	GND
		1275	GND
		1285	GND
		1295	GND
		1305	GND
		1315	GND
		1325	GND
		1335	GND
		1345	GND
		1355	GND
		1365	GND
		1375	GND
		1385	GND
		1395	GND
		1405	GND
		1415	GND
		1425	GND
		1435	GND
		1445	GND
		1455	GND
		1465	GND
		1475	GND
		1485	GND
		1495	GND
		1505	GND
		1515	GND
		1525	GND
		1535	GND
		1545	GND
		1555	GND
		1565	GND
		1575	GND
		1585	GND
		1595	GND
		1605	GND
		1615	GND
		1625	GND
		1635	GND
		1645	GND
		1655	GND
		1665	GND
		1675	GND
		1685	GND
		1695	GND
		1705	GND
		1715	GND
		1725	GND
		1735	GND
		1745	GND
		1755	GND
		1765	GND
		1775	GND
		1785	GND
		1795	GND
		1805	GND
		1815	GND
		1825	GND
		1835	GND
		1845	GND
		1855	GND
		1865	GND
		1875	GND
		1885	GND
		1895	GND
		1905	GND
		1915	GND
		1925	GND
		1935	GND
		1945	GND
		1955	GND
		1965	GND
		1975	GND
		1985	GND
		1995	GND
		2005	GND