



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Arduino Motor Shield (L298N) (SKU:DRI0009)

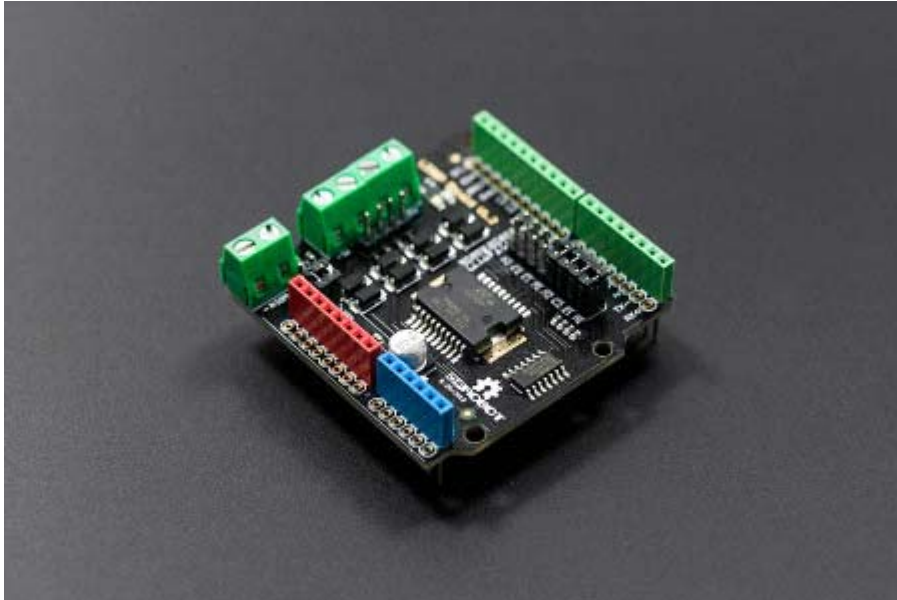

Contents

- [1 Introduction](#)
- [2 Specification](#)
- [3 PinOut](#)
- [4 Tutorial](#)
 - [4.1 Connection Diagram](#)
 - [4.2 Sample Code](#)
 - [4.2.1 PWM Speed Control](#)
 - [4.2.2 PLL Speed Control](#)
- [5 Trouble shooting](#)

Introduction

This motor shield allows Arduino to drive two channel DC motors. It uses a L298N chip which delivers output current up to 2A each channel. The speed control is achieved through conventional PWM which can be obtained from Arduino's PWM output Pin 5 and 6. The enable/disable function of the motor control is signalled by Arduino Digital Pin 4 and 7.

The Motor shield can be powered directly from Arduino or from external power source. It is strongly encouraged to use external power supply to power the motor shield.



IOREF pin for Version 1.2:

The board's IOREF pin is connected with pin 5V! So when adding the DRI0009 to the stack of board (controller), the controller's supply voltage would be changed to 5V! So it only can be compatible with the controller working at 5V. If you need to use controller working at other voltage, e.g. 3.3V, you need **CUT OFF** the IOREF pin of DRI0009.

We are deeply sorry about the mistake! We will revise the design in the next version.

Specification

- Logic Control Voltage : 5V (From Arduino)
- Motor Driven Voltage : 4.8~35V (From Arduino or External Power Source)
- Logic supply current I_{ss} : $\leq 36\text{mA}$
- Motor Driven current I_o : $\leq 2\text{A}$
- Maximum power consumption : 25W ($T=75^\circ\text{C}$)
- PWM、PLL Speed control mode
- Control signal level:
High : $2.3\text{V} \leq V_{in} \leq 5\text{V}$
Low : $-0.3\text{V} \leq V_{in} \leq 1.5\text{V}$


PinOut

Control Mode Selection Jumpers:

The shield supports PWM and PLL(Phased Locked Loop) control Modes. The PWM mode uses E1 and E2 to generate PWM signal. The PLL mode uses M1 and M2 to generate phase control signal.




Motor Terminal: Two DC motors are connected to blue motor terminals. The male header behind the terminals are the same as the motor terminals.

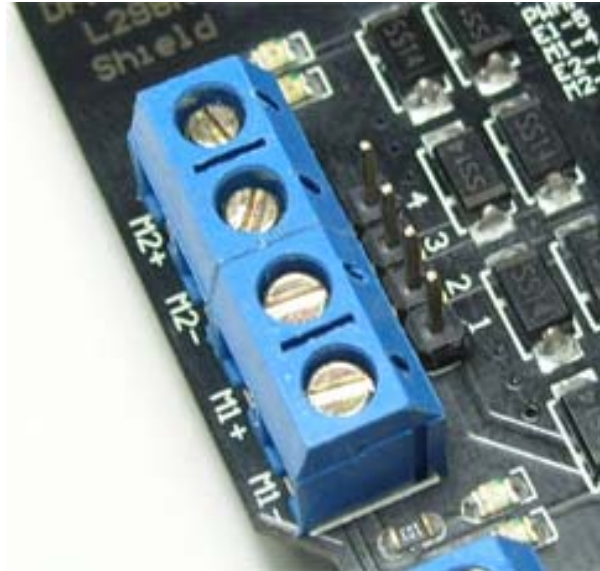

PWRIN :

The motors can be powered by external power supply when the motor current exceeds the limits provided from the Arduino. The switch between external and Arduino power is implemented by two jumpers.

- PWRIN: External Power
- VIN: Arduino Power
-

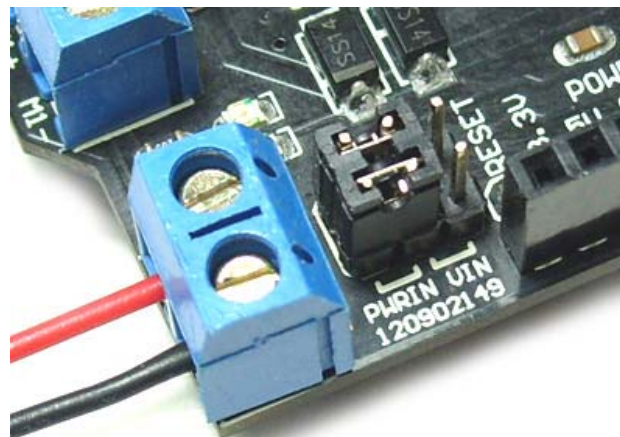

-

Control Signal Truth Table :

E1	M1		E2	M2	
L	X	Motor 1 Disabled	L	X	Motor 2 Disabled
H	H	Motor 1 Backward	H	H	Motor 2 Backward
PWM	X	PWM Speed control	PWM	X	PWM Speed control

NOTE:

H is High level;
 L is Low level;
 PWM is Pulse Width Modulation signal;
 X is any voltage level.


"PWM Mode"	
Pin	Function
Digital 4	Motor 1 Direction control
Digital 5	Motor 1 PWM control
Digital 6	Motor 2 PWM control
Digital 7	Motor 2 Direction control

"PLL Mode"	
Pin	Function
Digital 4	Motor 1 Enable control
Digital 5	Motor 1 Direction control

Digital 6	Motor 2 Direction control
Digital 7	Motor 2 Enable control

Tutorial

Connection Diagram

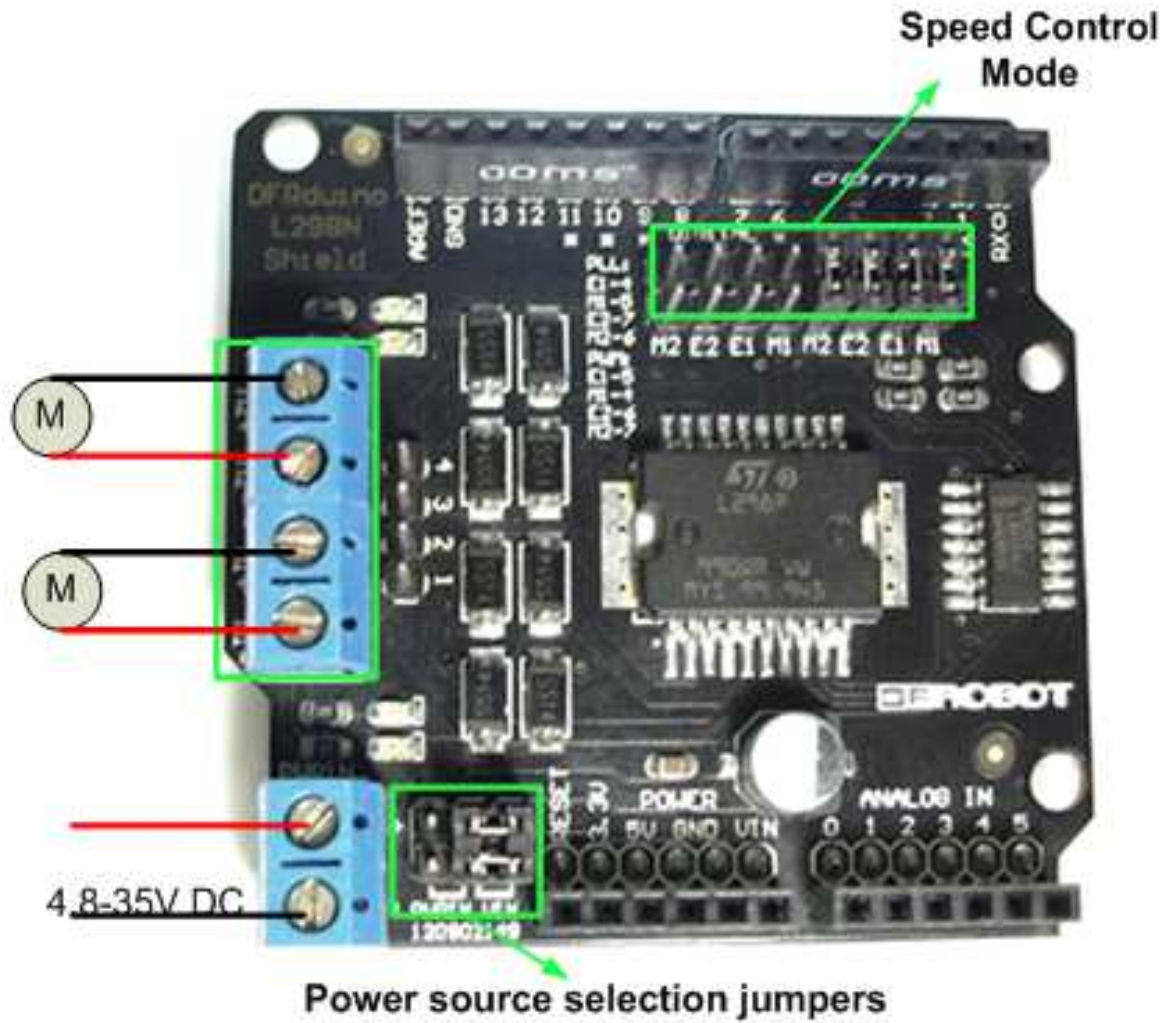

Sample Code

PWM Speed Control

```
//Arduino PWM Speed Control :
int E1 = 5;
```

```

int M1 = 4;
int E2 = 6;
int M2 = 7;

void setup()
{
    pinMode(M1, OUTPUT);
    pinMode(M2, OUTPUT);
}

void loop()
{
    int value;
    for(value = 0 ; value <= 255; value+=5)
    {
        digitalWrite(M1,HIGH);
        digitalWrite(M2, HIGH);
        analogWrite(E1, value); //PWM Speed Control
        analogWrite(E2, value); //PWM Speed Control
        delay(30);
    }
}

```

PLL Speed Control

```

//Arduino PLL Speed Control :
int E1 = 4;
int M1 = 5;
int E2 = 7;
int M2 = 6;

void setup()
{

```



```
    pinMode(M1, OUTPUT);
    pinMode(M2, OUTPUT);
    pinMode(E1, OUTPUT);
    pinMode(E2, OUTPUT);
}

void loop()
{
    int value;
    for(value = 0 ; value <= 255; value+=5)
    {
        digitalWrite(E1,HIGH);
        digitalWrite(E2, HIGH);
        analogWrite(M1, value);    //PLL Speed Control
        analogWrite(M2, value);    //PLL Speed Control
        delay(30);
    }
}
```


Trouble shooting

PWM speed control is used to simulate different voltage value accounted for by adjusting the air to control the voltage applied across the motor level to achieve speed.

$$\text{output_voltage} = (\text{on_time} / \text{off_time}) * \text{max_voltage}$$

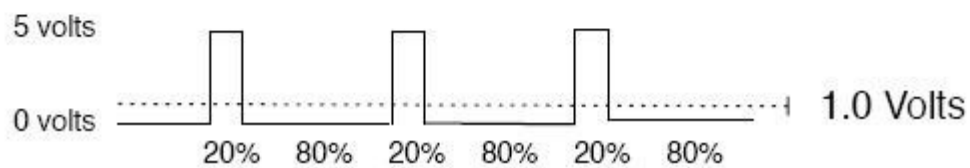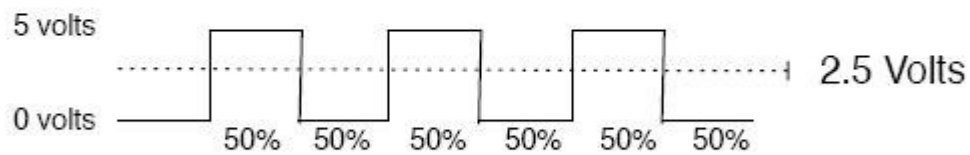

For any question/advice/cool idea to share, please visit [DFRobot Forum](#).